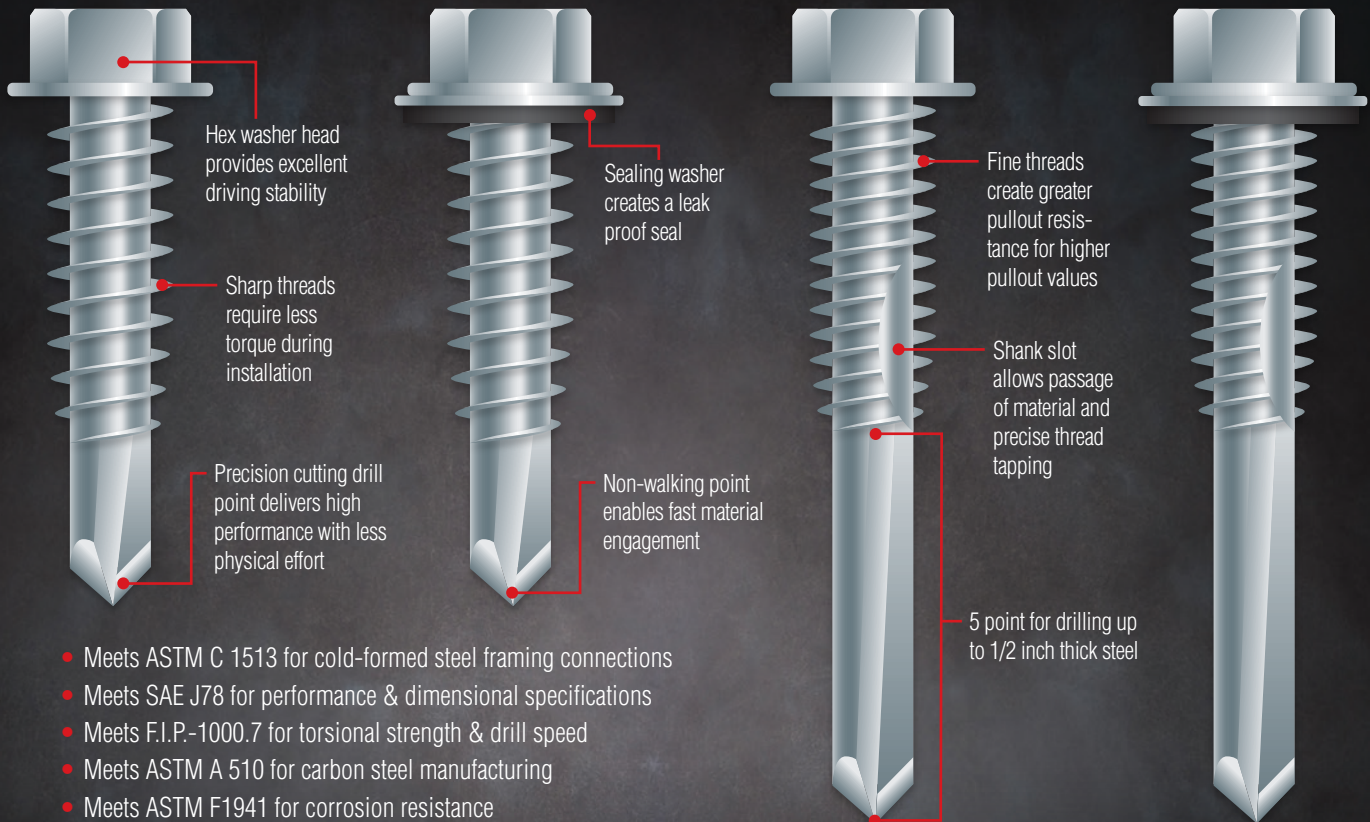


Hex Washer Head

Available in Zinc, Stainless-Steel or
with a Strong-Shield Coating for
Maximum Weather Protection

STRONG-POINT®

Attach metal to metal or wood to metal with confidence, using **Professional-Grade** Hex Washer Head screws




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets SAE J78 for performance & dimensional specifications
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance
- ICC-ES Evaluation Report: ESR-3528



Headmarked for traceability



#ESR-3528




INTERCORP 
www.intercorpusa.com

Los Angeles	New York	Chicago	Dallas	Atlanta	Portland	Houston	Cleveland	Miami
800.762.2004	888.322.2262	800.533.9669	800.558.7222	800.822.9690	800.434.5606	800.558.7222	800.533.9669	800.822.9690

Unslotted Indented Hex Washer Head, Zinc Plated

Material Application
 Attaches metal to metal.



- ICC-ES Evaluation Report: ESR-3528
- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
6-20 x 3/8	2	H606	20M	40	.035 - .090	H606V	2,500	H606I	500
6-20 x 1/2	2	H608	15M	35	.035 - .090	H608V	2,000	H608I	400
6-20 x 5/8	2	H610	15M	39	.035 - .090	H610V	1,875	H610I	375
6-20 x 3/4	2	H612	10M	31	.035 - .090	H612V	1,600	H612I	300
8-18 x 1/2	2	H808	10M	35	.035 - .100	H808V	1,500	H808I	300
8-18 x 5/8	2	H810	10M	40	.035 - .100	H810V	1,250	H810I	250
8-18 x 3/4	2	H812	10M	45	.035 - .100	H812V	1,000	H812I	200
8-18 x 1	2	H816	8M	44	.035 - .100	H816V	1,000	H816I	200
8-18 x 1-1/4	2	H820	5M	33	.035 - .100	H820V	750	H820I	125
8-18 x 1-1/2	2	H824	5M	38	.035 - .100	H824V	700	H824I	125
8-18 x 2	2	H832	3M	29	.035 - .100	H832V	500	H832I	100
10-16 x 1/2	2	H1008	8M	40	.035 - .110	H1008V	1,000	H1008I	200
10-16 x 5/8	2	H1010	8M	44	.035 - .110	H1010V	1,000	H1010I	200
10-16 x 3/4	3	H1012	8M	50	.035 - .176	H1012V	1,000	H1012I	200
10-16 x 3/4**	3	H1012H	6M	42	.035 - .176	H1012HV	700	H1012HI	150
10-16 x 1	3	H1016	5M	40	.035 - .176	H1016V	700	H1016I	150
10-16 x 1-1/4	3	H1020	4M	37	.035 - .176	H1020V	500	H1020I	100
10-16 x 1-1/2	3	H1024	3M	32	.035 - .176	H1024V	500	H1024I	100
10-16 x 2	3	H1032	2M	26	.035 - .176	H1032V	400	H1032I	80
10-16 x 2-1/2	3	H1040	1M	15	.035 - .176	H1040V	300	H1040I	60
10-16 x 3	3	H1048	1M	18	.035 - .176	H1048V	250	H1048I	50
12-14 x 3/4	3	H1212	4M	33	.035 - .210	H1212V	600	H1212I	125
12-14 x 1	3	H1216	4M	40	.035 - .210	H1216V	500	H1216I	100
12-14 x 1-1/4	3	H1220	3M	35	.035 - .210	H1220V	400	H1220I	80
12-14 x 1-1/2	3	H1224	3M	40	.035 - .210	H1224V	400	H1224I	75
12-14 x 2	3	H1232	2M	33	.035 - .210	H1232V	300	H1232I	50
12-14 x 2-1/2	3	H1240	1.5M	30	.035 - .210	H1240V	250	H1240I	50
12-14 x 3	3	H1248	1M	23	.035 - .210	H1248V	200	H1248I	50
12-14 x 4	3	H1264	.5M	16	.035 - .210	H1264V	150	H1264I	30
14-14 x 3/4	3	H1412	4M	50	.060 - .220	H1412V	400	H1412I	80
14-14 x 1	3	H1416	3M	45	.060 - .220	H1416V	350	H1416I	70
14-14 x 1-1/4	3	H1420	2M	35	.060 - .220	H1420V	300	H1420I	60
14-14 x 1-1/2	3	H1424	2M	40	.060 - .220	H1424V	250	H1424I	50
14-14 x 1-3/4	3	H1428	1.5M	34	.060 - .220	H1428V	250	H1428I	50
14-14 x 2	3	H1432	1.5M	38	.060 - .220	H1432V	200	H1432I	40
14-14 x 2-1/2	3	H1440	1M	30	.060 - .220	H1440V	150	H1440I	30
14-14 x 3	3	H1448	1M	35	.060 - .220	H1448V	150	H1448I	30
14-14 x 4	3	H1464	.5M	22	.060 - .220	H1464V	100	H1464I	20
14-14 x 4-1/2	3	H1472	.5M	24	.060 - .220	H1472V	100	H1472I	20
14-14 x 5	3	H1480	.5M	27	.060 - .220	H1480V	100	H1480I	20
14-14 x 6	3	H1496	.5M	31	.060 - .220	H1496V	75	N/A	N/A
14-14 x 7/8 #12 HD***	1	H1	3M	36	.018 - .090	H1V	400	H1I	80

** Hi-Hex Head w/Reverse Serrations - Head Height: .160 - .178


*** Lap Stitching

*Carton weights are approximate and may vary.

Note: 5lb. boxes sold 6 per case. 1lb. boxes sold 20 per case.

Unslotted Indented Hex Washer Head w/Bonded Washer, Zinc Plated

Material Application
 Attaches metal to metal.



- ICC-ES Evaluation Report: ESR-3528
- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance
- Bonded washer creates leak proof seal



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 1/2	2	HA808	5M	28	.035 - .100	1/2" O.D.	HA808V	1,000	HA808I	200
8-18 x 5/8	2	HA810	5M	30	.035 - .100	1/2" O.D.	HA810V	800	HA810I	150
8-18 x 3/4	2	HA812	5M	33	.035 - .100	1/2" O.D.	HA812V	800	HA812I	150
8-18 x 1	2	HA816	4M	30	.035 - .100	1/2" O.D.	HA816V	650	HA816I	125
8-18 x 1-1/4	2	HA820	3M	26	.035 - .100	1/2" O.D.	HA820V	500	HA820I	100
8-18 x 1-1/2	2	HA824	2.5M	24	.035 - .100	1/2" O.D.	HA824V	500	HA824I	100
8-18 x 2	2	HA832	2.5M	29	.035 - .100	1/2" O.D.	HA832V	400	HA832I	100
10-16 x 1/2	2	HA1008	4M	30	.035 - .110	1/2" O.D.	HA1008V	650	HA1008I	130
10-16 x 5/8	2	HA1010	4M	32	.035 - .110	1/2" O.D.	HA1010V	650	HA1010I	130
10-16 x 3/4	3	HA1012	4M	35	.035 - .176	1/2" O.D.	HA1012V	600	HA1012I	125
10-16 x 1	3	HA1016	3M	32	.035 - .176	1/2" O.D.	HA1016V	500	HA1016I	100
10-16 x 1-1/4	3	HA1020	2.5M	30	.035 - .176	1/2" O.D.	HA1020V	400	HA1020I	100
10-16 x 1-1/2	3	HA1024	2M	26	.035 - .176	1/2" O.D.	HA1024V	400	HA1024I	80
10-16 x 2	3	HA1032	1.5M	23	.035 - .176	1/2" O.D.	HA1032V	300	HA1032I	60
10-16 x 2-1/2	3	HA1040	1M	18	.035 - .176	1/2" O.D.	HA1040V	250	HA1040I	50
10-16 x 3	3	HA1048	1M	21	.035 - .176	1/2" O.D.	HA1048V	250	HA1048I	50
12-14 x 3/4	3	HA1212	3M	32	.035 - .210	9/16" O.D.	HA1212V	500	HA1212I	100
12-14 x 1	3	HA1216	3M	37	.035 - .210	9/16" O.D.	HA1216V	400	HA1216I	80
12-14 x 1-1/4	3	HA1220	2.5M	35	.035 - .210	9/16" O.D.	HA1220V	350	HA1220I	75
12-14 x 1-1/2	3	HA1224	2M	31	.035 - .210	9/16" O.D.	HA1224V	300	HA1224I	70
12-14 x 2	3	HA1232	1.5M	29	.035 - .210	9/16" O.D.	HA1232V	250	HA1232I	50
12-14 x 2-1/2	3	HA1240	1M	22	.035 - .210	9/16" O.D.	HA1240V	200	HA1240I	40
12-14 x 3	3	HA1248	1M	26	.035 - .210	9/16" O.D.	HA1248V	200	HA1248I	40
12-14 x 4	3	HA1264	.5M	16	.035 - .210	9/16" O.D.	HA1264V	150	HA1264I	30
14-14 x 3/4	3	HA1412	3M	45	.060 - .220	5/8" O.D.	HA1412V	300	HA1412I	60
14-14 x 1	3	HA1416	2.5M	44	.060 - .220	5/8" O.D.	HA1416V	250	HA1416I	50
14-14 x 1-1/4	3	HA1420	2M	40	.060 - .220	5/8" O.D.	HA1420V	250	HA1420I	50
14-14 x 1-1/2	3	HA1424	2M	45	.060 - .220	5/8" O.D.	HA1424V	200	HA1424I	40
14-14 x 1-3/4	3	HA1428	1.5M	38	.060 - .220	5/8" O.D.	HA1428V	200	HA1428I	40
14-14 x 2	3	HA1432	1.5M	41	.060 - .220	5/8" O.D.	HA1432V	180	HA1432I	35
14-14 x 2-1/2	3	HA1440	1M	33	.060 - .220	5/8" O.D.	HA1440V	150	HA1440I	30
14-14 x 3	3	HA1448	1M	38	.060 - .220	5/8" O.D.	HA1448V	125	HA1448I	25
14-14 x 4	3	HA1464	.5M	23	.060 - .220	5/8" O.D.	HA1464V	100	HA1464I	20
14-14 x 5	3	HA1480	.5M	27	.060 - .220	5/8" O.D.	HA1480V	100	HA1480I	20
14-14 x 6	3	HA1496	.5M	32	.060 - .220	5/8" O.D.	HA1496V	75	N/A	N/A
14-14 x 7/8 #12 HD**	1	HA1	2.5M	30	.018 - .090	5/8" O.D.	HA1V	300	HA1I	60


**Lap Stitching

*Carton weights are approximate and may vary.


Note: 5lb. boxes sold 6 per case. 1lb. boxes sold 20 per case.

Unslotted Indented Hex Washer Head, Strong-Shield Coated

Material Application
Attaches metal to metal.



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance




NEW!

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-16 x 3/4	3	H1012C	8M	50	.035 - .176	H1012CV	1,000	H1012CI	200
10-16 x 1	3	H1016C	5M	40	.035 - .176	H1016CV	700	H1016CI	150
10-16 x 1-1/2	3	H1024C	3M	32	.035 - .176	H1024CV	500	H1024CI	100
10-16 x 2	3	H1032C	2M	26	.035 - .176	H1032CV	400	H1032CI	80
12-14 x 3/4	3	H1212C	4M	33	.035 - .210	H1212CV	600	H1212CI	125
12-14 x 1	3	H1216C	4M	40	.035 - .210	H1216CV	500	H1216CI	100
12-14 x 1-1/4	3	H1220C	3M	35	.035 - .210	H1220CV	400	H1220CI	75
12-14 x 1-1/2	3	H1224C	3M	40	.035 - .210	H1224CV	400	H1224CI	80
12-14 x 2	3	H1232C	2M	33	.035 - .210	H1232CV	300	H1232CI	50
12-14 x 2-1/2	3	H1240C	1.5M	30	.035 - .210	H1240CV	250	H1240CI	50
12-14 x 3	3	H1248C	1M	23	.035 - .210	H1248CV	200	H1248CI	50
14-14 x 3/4	3	H1412C	4M	50	.060 - .220	H1412CV	400	H1412CI	80
14-14 x 1	3	H1416C	3M	45	.060 - .220	H1416CV	350	H1416CI	75
14-14 x 1-1/4	3	H1420C	2M	35	.060 - .220	H1420CV	300	H1420CI	60
14-14 x 1-1/2	3	H1424C	2M	40	.060 - .220	H1424CV	250	H1424CI	50
14-14 x 2	3	H1432C	1.5M	38	.060 - .220	H1432CV	200	H1432CI	40
14-14 x 2-1/2	3	H1440C	1M	30	.060 - .220	H1440CV	150	H1440CI	30
14-14 x 3	3	H1448C	1M	35	.060 - .220	H1448CV	150	H1448CI	30
14-14 x 7/8 #12 HD	1	H1C	3M	36	.018 - .090	H1CV	400	H1CI	80

Unslotted Indented Hex Washer Head w/Bonded Washer, Strong-Shield Coated

Material Application
Attaches metal to metal.



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance




NEW!

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-16 x 3/4	3	HA1012C	4M	35	.035 - .176	1/2" O.D.	HA1012CV	600	HA1012CI	125
10-16 x 1	3	HA1016C	3M	32	.035 - .176	1/2" O.D.	HA1016CV	500	HA1016CI	100
10-16 x 1-1/2	3	HA1024C	2M	26	.035 - .176	1/2" O.D.	HA1024CV	400	HA1024CI	80
10-16 x 2	3	HA1032C	1.5M	23	.035 - .176	1/2" O.D.	HA1032CV	300	HA1032CI	60
12-14 x 3/4	3	HA1212C	3M	32	.035 - .210	9/16" O.D.	HA1212CV	500	HA1212CI	100
12-14 x 1	3	HA1216C	3M	37	.035 - .210	9/16" O.D.	HA1216CV	400	HA1216CI	80
12-14 x 1-1/4	3	HA1220C	2.5M	35	.035 - .210	9/16" O.D.	HA1220CV	350	HA1220CI	75
12-14 x 1-1/2	3	HA1224C	2M	31	.035 - .210	9/16" O.D.	HA1224CV	300	HA1224CI	70
12-14 x 2	3	HA1232C	1.5M	29	.035 - .210	9/16" O.D.	HA1232CV	250	HA1232CI	50
12-14 x 2-1/2	3	HA1240C	1M	22	.035 - .210	9/16" O.D.	HA1240CV	200	HA1240CI	40
12-14 x 3	3	HA1248C	1M	26	.035 - .210	9/16" O.D.	HA1248CV	200	HA1248CI	40
14-14 x 3/4	3	HA1412C	3M	45	.060 - .220	5/8" O.D.	HA1412CV	300	HA1412CI	60
14-14 x 1	3	HA1416C	2.5M	44	.060 - .220	5/8" O.D.	HA1416CV	250	HA1416CI	50
14-14 x 1-1/4	3	HA1420C	2M	40	.060 - .220	5/8" O.D.	HA1420CV	250	HA1420CI	50
14-14 x 1-1/2	3	HA1424C	2M	45	.060 - .220	5/8" O.D.	HA1424CV	200	HA1424CI	40
14-14 x 2	3	HA1432C	1.5M	41	.060 - .220	5/8" O.D.	HA1432CV	180	HA1432CI	35
14-14 x 2-1/2	3	HA1440C	1M	33	.060 - .220	5/8" O.D.	HA1440CV	150	HA1440CI	30
14-14 x 3	3	HA1448C	1M	38	.060 - .220	5/8" O.D.	HA1448CV	125	HA1448CI	25
14-14 x 7/8 #12 HD	1	HA1C	2.5M	30	.018 - .090	5/8" O.D.	HA1CV	300	HA1CI	60


*Carton weights are approximate and may vary.

Note: 5lb. boxes sold 6 per case. 1lb. boxes sold 20 per case.

Unslotted Indented Hex Washer Head w/Locking Serrations, Zinc Plated NEW ITEM!**Material Application**
Attaches metal to metal.


- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
14-14 x 1**	3	H14167	2.5M	46	.060 - .220	H14167V	250	H14167I	50
**7/16 A.F									

Unslotted Indented Hex Washer Head w/Locking Serrations, Zinc Plated NEW ITEM!**Material Application**
Attaches metal to metal.


- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
5/16-12 x 1**	3	H1616	2M	50	.060 - .220	H1616V	200	H1616I	40
5/16-12 x 1-1/2**	3	H1624	1.5M	49	.060 - .220	H1624V	150	H1624I	30
5/16-12 x 2**	3	H1632	1M	41	.060 - .220	H1632V	125	H1632I	25
**7/16 A.F									

Unslotted Indented Hex Washer Head, Zinc Plated**Material Application**
Attaches metal to metal.

- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 7/8	4	H4	4M	36	.125 - .250	H4V	500	H4I	100

Unslotted Indented Hex Washer Head, Zinc Plated**Material Application**
Attaches metal to metal.


- ICC-ES Evaluation Report: ESR-3528
- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 1-1/4	5	H5	3.5M	39	.125 - .500	H5V	400	H5I	100
12-24 x 1-1/2	5	H52	2.5M	33	.125 - .500	H52V	400	H52I	80
12-24 x 2	5	H53	2M	33	.125 - .500	H53V	300	H53I	60
12-24 x 3	5	H54	1M	23	.125 - .500	H54V	200	H54I	40

*Carton weights are approximate and may vary.


Note: 5lb. boxes sold 6 per case. 1lb. boxes sold 20 per case.

Unslotted Indented Hex Washer Head, Strong-Shield Coated

- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance

Material Application
Attaches metal to metal.


Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 7/8	4	H4C	4M	36	.125 - .250	H4CV	500	H4CI	100

Unslotted Indented Hex Washer Head, Strong-Shield Coated

- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance

Material Application
Attaches metal to metal.


Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 1-1/4	5	H5C	3.5M	39	.125 - .500	H5CV	400	H5CI	100
12-24 x 1-1/2	5	H52C	2.5M	33	.125 - .500	H52CV	400	H52CI	80
12-24 x 2	5	H53C	2M	33	.125 - .500	H53CV	300	H53CI	60
12-24 x 3	5	H54C	1M	23	.125 - .500	H54CV	200	H54CI	40

Unslotted Indented Hex Washer Head w/Bonded Washer, Zinc Plated

- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM F1941 for corrosion resistance
- Bonded washer creates leak proof seal

Material Application
Attaches metal to metal.

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 7/8	4	HA4	3M	38	.125 - .250	9/16" O.D.	HA4V	400	HA4I	80

Unslotted Indented Hex Washer Head w/Bonded Washer, Zinc Plated


- ICC-ES Evaluation Report: ESR-3528
- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Meets ASTM A 510 for carbon steel manufacturing
- Meets ASTM F1941 for corrosion resistance
- Bonded washer creates leak proof seal

Material Application
Attaches metal to metal.

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 1-1/4	5	HA5	3M	42	.125 - .500	9/16" O.D.	HA5V	375	HA5I	75
12-24 x 1-1/2	5	HA52	2.5M	41	.125 - .500	9/16" O.D.	HA52V	300	HA52I	60
12-24 x 2	5	HA53	2M	38	.125 - .500	9/16" O.D.	HA53V	250	HA53I	50
12-24 x 3	5	HA54	1M	28	.125 - .500	9/16" O.D.	HA54V	200	HA54I	40

*Carton weights are approximate and may vary.


Note: 5lb. boxes sold 6 per case. 1lb. boxes sold 20 per case.

Unslotted Indented Hex Washer Head w/Bonded Washer, Strong-Shield Coated

- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance

Material Application
Attaches metal to metal.


Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 7/8	4	HA4C	3M	38	.125 - .250	9/16" O.D.	HA4CV	400	HA4CI	80

Unslotted Indented Hex Washer Head w/Bonded Washer, Strong-Shield Coated

- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance

Material Application
Attaches metal to metal.


Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 1-1/4	5	HA5C	3M	42	.125 - .500	9/16" O.D.	HA5CV	375	HA5CI	75
12-24 x 1-1/2	5	HA52C	2.5M	41	.125 - .500	9/16" O.D.	HA52CV	300	HA52CI	60
12-24 x 2	5	HA53C	2M	38	.125 - .500	9/16" O.D.	HA53CV	250	HA53CI	50
12-24 x 3	5	HA54C	1M	28	.125 - .500	9/16" O.D.	HA54CV	200	HA54CI	40

Unslotted Indented Hex Washer Head, Strong-Shield Coated NEW ITEM!


- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance

Material Application
Attaches metal to metal.

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
1/4-20 x 3	5	H543C	1M	34	.125 - .500	H543CV	125	H543CI	25
1/4-20 x 4	5	H544C	.5M	22	.125 - .500	H544CV	100	H544CI	25

Unslotted Indented Hex Washer Head, Strong-Shield Coated NEW ITEM!

- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance


Material Application
Attaches metal to metal.

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
1/4-20 x 5	5	H545C	.5M	26	.125 - .500	H545CV	100	H545CI	20
1/4-20 x 6	5	H546C	.5M	31	.125 - .500	H546CV	75	H546CI	N/A
1/4-20 x 8	5	H548C	.25M	20	.125 - .500	H548CV	N/A	H548CI	N/A

*Carton weights are approximate and may vary.

Note: 5lb. boxes sold 6 per case. 1lb. boxes sold 20 per case.

410 Stainless Steel Unslotted Indented Hex Washer Head, Self-Drilling, Passivated & Waxed




- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications

Material Application
Attaches metal or aluminum
to metal or aluminum.

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 1/2	2	4H808	5M	18	.035 - .100	4H808V	1,500	4H808I	300
8-18 x 3/4	2	4H812	5M	23	.035 - .100	4H812V	1,000	4H812I	200
8-18 x 1	2	4H816	4M	22	.035 - .100	4H816V	1,000	4H816I	200
10-16 x 1/2	2	4H1008	5M	26	.035 - .110	4H1008V	1,000	4H1008I	200
10-16 x 3/4	3	4H1012	4M	25	.035 - .176	4H1012V	1,000	4H1012I	200
10-16 x 1	3	4H1016	3M	24	.035 - .176	4H1016V	600	4H1016I	150
10-16 x 1-1/4	3	4H1020	2.5M	23	.035 - .176	4H1020V	500	4H1020I	100
10-16 x 1-1/2	3	4H1024	2M	21	.035 - .176	4H1024V	500	4H1024I	100
10-16 x 2	3	4H1032	1.5M	15	.035 - .176	4H1032V	400	4H1032I	80
12-14 x 3/4	3	4H1212	4M	33	.035 - .210	4H1212V	600	4H1212I	125
12-14 x 1	3	4H1216	3M	30	.035 - .210	4H1216V	500	4H1216I	100
12-14 x 1-1/4	3	4H1220	3M	35	.035 - .210	4H1220V	400	4H1220I	80
12-14 x 1-1/2	3	4H1224	2.5M	33	.035 - .210	4H1224V	400	4H1224I	80
12-14 x 2	3	4H1232	2M	33	.035 - .210	4H1232V	300	4H1232I	60
12-14 x 2-1/2	3	4H1240	1M	18	.035 - .210	4H1240V	250	4H1240I	50
14-14 x 3/4	3	4H1412	3M	38	.060 - .220	4H1412V	400	4H1412I	80
14-14 x 1	3	4H1416	2.5M	38	.060 - .220	4H1416V	350	4H1416I	70
14-14 x 1-1/4	3	4H1420	2M	35	.060 - .220	4H1420V	300	4H1420I	50
14-14 x 1-1/2	3	4H1424	1.5M	30	.060 - .220	4H1424V	250	4H1424I	50
14-14 x 2	3	4H1432	1M	25	.060 - .220	4H1432V	200	4H1432I	40
14-14 x 2-1/2	3	4H1440	.8M	24	.060 - .220	4H1440V	150	4H1440I	30
14-14 x 3	3	4H1448	.5M	17	.060 - .220	4H1448V	150	4H1448I	25
14-14 x 4	3	4H1464	.5M	22	.060 - .220	4H1464V	100	4H1464I	20
14-14 x 5	3	4H1480	.25M	13	.060 - .220	4H1480V	100	4H1480I	20
14-14 x 6	3	4H1496	.25M	16	.060 - .220	4H1496V	75	N/A	N/A
14-14 x 7/8 #12 HD	1	4H1	2.5M	30	.018 - .090	4H1V	400	4H1I	80

410 Stainless Steel Unslotted Indented Hex Washer Head, Self-Drilling, Passivated & Waxed



- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications

Material Application
Attaches metal or aluminum
to metal or aluminum.


Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 1-1/4	5	4H5	3M	35	.125 - .500	4H5V	400	4H5I	100
12-24 x 1-1/2	5	4H52	2M	26	.125 - .500	4H52V	400	4H52I	80
12-24 x 2	5	4H53	1.5M	24	.125 - .500	4H53V	300	4H53I	60

*Carton weights are approximate and may vary.

Note: 5lb. and 1lb. Stainless Steel boxes sold per case or individually.

410 Stainless Steel Unslotted Indented Hex Washer Head w/Bonded Washer, Self-Drilling, Passivated & Waxed

Material Application
Attaches metal or aluminum
to metal or aluminum.




- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Bonded washer creates leak proof seal

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
8-18 x 1/2	2	4HA808	5M	32	.035 - .100	1/2" O. D.	4HA808V	1,000	4HA808I	200
8-18 x 3/4	2	4HA812	5M	35	.035 - .100	1/2" O. D.	4HA812V	800	4HA812I	150
8-18 x 1	2	4HA816	4M	30	.035 - .100	1/2" O. D.	4HA816V	650	4HA816I	125
10-16 x 3/4	3	4HA1012	4M	35	.035 - .176	1/2" O. D.	4HA1012V	600	4HA1012I	125
10-16 x 1	3	4HA1016	3M	31	.035 - .176	1/2" O. D.	4HA1016V	500	4HA1016I	100
10-16 x 1-1/4	3	4HA1020	2.5M	30	.035 - .176	1/2" O. D.	4HA1020V	400	4HA1020I	100
10-16 x 1-1/2	3	4HA1024	2M	26	.035 - .176	1/2" O. D.	4HA1024V	400	4HA1024I	80
10-16 x 2	3	4HA1032	1.5M	22	.035 - .176	1/2" O. D.	4HA1032V	300	4HA1032I	60
12-14 x 3/4	3	4HA1212	3M	32	.035 - .210	9/16" O. D.	4HA1212V	500	4HA1212I	100
12-14 x 1	3	4HA1216	3M	37	.035 - .210	9/16" O. D.	4HA1216V	400	4HA1216I	80
12-14 x 1-1/4	3	4HA1220	2.5M	35	.035 - .210	9/16" O. D.	4HA1220V	350	4HA1220I	75
12-14 x 1-1/2	3	4HA1224	2.5M	39	.035 - .210	9/16" O. D.	4HA1224V	300	4HA1224I	70
12-14 x 2	3	4HA1232	1.5M	28	.035 - .210	9/16" O. D.	4HA1232V	250	4HA1232I	50
12-14 x 2-1/2	3	4HA1240	1M	22	.035 - .210	9/16" O. D.	4HA1240V	200	4HA1240I	40
14-14 x 3/4	3	4HA1412	3M	45	.060 - .220	5/8" O. D.	4HA1412V	300	4HA1412I	60
14-14 x 1	3	4HA1416	2.5M	44	.060 - .220	5/8" O. D.	4HA1416V	300	4HA1416I	50
14-14 x 1-1/4	3	4HA1420	2M	40	.060 - .220	5/8" O. D.	4HA1420V	250	4HA1420I	50
14-14 x 1-1/2	3	4HA1424	1.5M	34	.060 - .220	5/8" O. D.	4HA1424V	200	4HA1424I	40
14-14 x 2	3	4HA1432	1M	28	.060 - .220	5/8" O. D.	4HA1432V	180	4HA1432I	35
14-14 x 2-1/2	3	4HA1440	.8M	26	.060 - .220	5/8" O. D.	4HA1440V	160	4HA1440I	30
14-14 x 3	3	4HA1448	.5M	18	.060 - .220	5/8" O. D.	4HA1448V	125	4HA1448I	25
14-14 x 4	3	4HA1464	.5M	22	.060 - .220	5/8" O. D.	4HA1464V	100	4HA1464I	20
14-14 x 5	3	4HA1480	.25M	14	.060 - .220	5/8" O. D.	4HA1480V	100	4HA1480I	20
14-14 x 7/8 #12 HD	1	4HA1	2.5M	38	.018 - .090	5/8" O. D.	4HA1V	300	4HA1I	60

410 Stainless Steel Unslotted Indented Hex Washer Head w/Bonded Washer, Self-Drilling, Passivated & Waxed

Material Application
Attaches metal or aluminum
to metal or aluminum.



- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Bonded washer creates leak proof seal

Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 1-1/4	5	4HA5	3M	42	.125 - .500	9/16" O. D.	4HA5V	375	4HA5I	75
12-24 x 1-1/2	5	4HA52	2M	33	.125 - .500	9/16" O. D.	4HA52V	300	4HA52I	60
12-24 x 2	5	4HA53	1.5M	29	.125 - .500	9/16" O. D.	4HA53V	250	4HA53I	50

*Carton weights are approximate and may vary.

Note: 5lb. and 1lb. Stainless Steel boxes sold per case or individually.