


# Stainless Has Met Its Match!


**STRONG-POINT®**

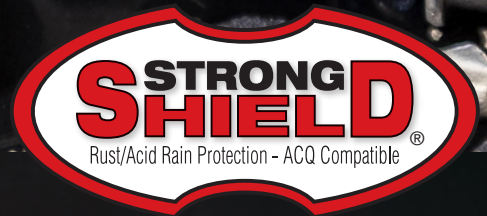

Attach metal to metal in roofing, siding, carports, patios, mezzanines, framing and more, using our **Strong-Shield** coated fasteners.

- High degree of corrosion resistance
- Exceeds 1,000/hr. Salt Spray Resistance
- Rust/Acid Rain Protection
- ACQ Compatible

50% less expensive than stainless steel fasteners and more than 40 times as much corrosion resistance as zinc. Ideal for all applications where corrosion is a concern.

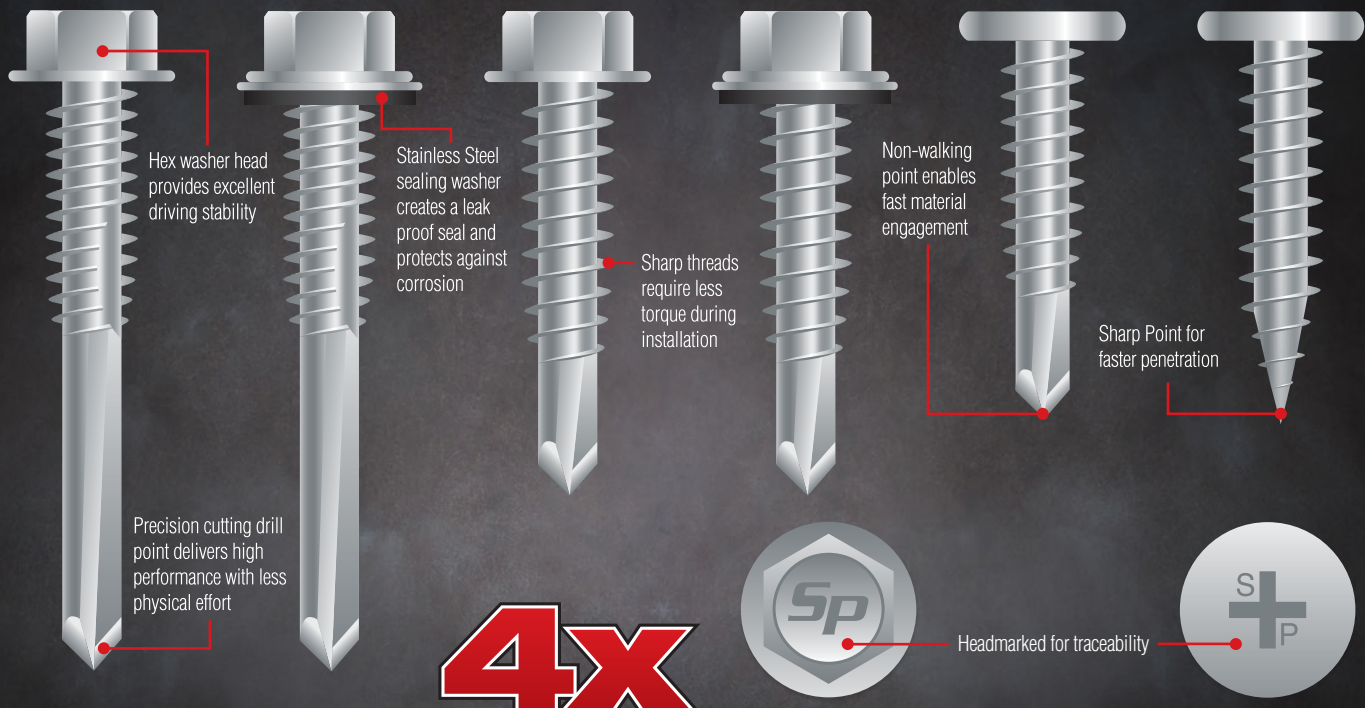


Experience the Difference  
with **STRONG-POINT®**  
Professional Grade Fasteners

**Four Times the Protection!** These Strong-Shield coated fasteners have a four-layer protective barrier that prevents fastener corrosion. A metallic zinc layer, a passivation layer, a functional nano-coating layer, that is used as a sealer, and a high-grade anti-corrosion chemical conversion film.

**INTERCORP**   
www.intercorpusa.com


Los Angeles 800.762.2004 | New York 888.322.2262 | Chicago 800.533.9669 | Dallas 800.558.7222 | Atlanta 800.822.9690 | Portland 800.434.5606 | Houston 800.558.7222 | Cleveland 800.533.9669 | Miami 800.822.9690

## Unslotted Indented Hex Washer Head, Strong-Shield Coated




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance

**Material Application**  
 Attaches metal to metal.



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-16 x 3/4	3	H1012C	8M	50	.035 - .176	H1012CV	1,000	H1012CI	200
10-16 x 1	3	H1016C	5M	40	.035 - .176	H1016CV	700	H1016CI	150
10-16 x 1-1/2	3	H1024C	3M	32	.035 - .176	H1024CV	500	H1024CI	100
10-16 x 2	3	H1032C	2M	26	.035 - .176	H1032CV	400	H1032CI	80
12-14 x 3/4	3	H1212C	4M	33	.035 - .210	H1212CV	600	H1212CI	125
12-14 x 1	3	H1216C	4M	40	.035 - .210	H1216CV	500	H1216CI	100
12-14 x 1-1/4	3	H1220C	3M	35	.035 - .210	H1220CV	400	H1220CI	75
12-14 x 1-1/2	3	H1224C	3M	40	.035 - .210	H1224CV	400	H1224CI	80
12-14 x 2	3	H1232C	2M	33	.035 - .210	H1232CV	300	H1232CI	50
12-14 x 2-1/2	3	H1240C	1.5M	30	.035 - .210	H1240CV	250	H1240CI	50
12-14 x 3	3	H1248C	1M	23	.035 - .210	H1248CV	200	H1248CI	50
14-14 x 3/4	3	H1412C	4M	50	.060 - .220	H1412CV	400	H1412CI	80
14-14 x 1	3	H1416C	3M	45	.060 - .220	H1416CV	350	H1416CI	75
14-14 x 1-1/4	3	H1420C	2M	35	.060 - .220	H1420CV	300	H1420CI	60
14-14 x 1-1/2	3	H1424C	2M	40	.060 - .220	H1424CV	250	H1424CI	50
14-14 x 2	3	H1432C	1.5M	38	.060 - .220	H1432CV	200	H1432CI	40
14-14 x 2-1/2	3	H1440C	1M	30	.060 - .220	H1440CV	150	H1440CI	30
14-14 x 3	3	H1448C	1M	35	.060 - .220	H1448CV	150	H1448CI	30
14-14 x 7/8 #12 HD	1	H1C	3M	36	.018 - .090	H1CV	375	H1CI	75

## Unslotted Indented Hex Washer Head w/Bonded Washer, Strong-Shield Coated



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance

**Material Application**  
 Attaches metal to metal.




Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-16 x 3/4	3	HA1012C	4M	35	.035 - .176	1/2" O.D.	HA1012CV	600	HA1012CI	125
10-16 x 1	3	HA1016C	3M	32	.035 - .176	1/2" O.D.	HA1016CV	375	HA1016CI	75
10-16 x 1-1/2	3	HA1024C	2M	26	.035 - .176	1/2" O.D.	HA1024CV	400	HA1024CI	80
10-16 x 2	3	HA1032C	1.5M	23	.035 - .176	1/2" O.D.	HA1032CV	300	HA1032CI	60
12-14 x 3/4	3	HA1212C	3M	32	.035 - .210	9/16" O.D.	HA1212CV	500	HA1212CI	100
12-14 x 1	3	HA1216C	3M	37	.035 - .210	9/16" O.D.	HA1216CV	375	HA1216CI	75
12-14 x 1-1/4	3	HA1220C	2.5M	35	.035 - .210	9/16" O.D.	HA1220CV	350	HA1220CI	75
12-14 x 1-1/2	3	HA1224C	2M	31	.035 - .210	9/16" O.D.	HA1224CV	300	HA1224CI	70
12-14 x 2	3	HA1232C	1.5M	29	.035 - .210	9/16" O.D.	HA1232CV	250	HA1232CI	50
12-14 x 2-1/2	3	HA1240C	1M	22	.035 - .210	9/16" O.D.	HA1240CV	200	HA1240CI	40
12-14 x 3	3	HA1248C	1M	26	.035 - .210	9/16" O.D.	HA1248CV	200	HA1248CI	40
14-14 x 3/4	3	HA1412C	3M	45	.060 - .220	5/8" O.D.	HA1412CV	300	HA1412CI	60
14-14 x 1	3	HA1416C	2.5M	44	.060 - .220	5/8" O.D.	HA1416CV	250	HA1416CI	50
14-14 x 1-1/4	3	HA1420C	2M	40	.060 - .220	5/8" O.D.	HA1420CV	250	HA1420CI	50
14-14 x 1-1/2	3	HA1424C	2M	45	.060 - .220	5/8" O.D.	HA1424CV	200	HA1424CI	40
14-14 x 2	3	HA1432C	1.5M	41	.060 - .220	5/8" O.D.	HA1432CV	180	HA1432CI	35
14-14 x 2-1/2	3	HA1440C	1M	33	.060 - .220	5/8" O.D.	HA1440CV	150	HA1440CI	30
14-14 x 3	3	HA1448C	1M	38	.060 - .220	5/8" O.D.	HA1448CV	125	HA1448CI	25
14-14 x 7/8 #12 HD	1	HA1C	2.5M	30	.018 - .090	5/8" O.D.	HA1CV	300	HA1CI	60

\*Carton weights are approximate and may vary.


Note: 5lb. boxes sold 6 per case. 1lb. boxes sold 20 per case.

### Unslotted Indented Hex Washer Head, Strong-Shield Coated




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance

**Material Application**  
 Attaches metal to metal.



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 7/8	4	H4C	4M	36	.125 - .250	H4CV	500	H4CI	100

### Unslotted Indented Hex Washer Head, Strong-Shield Coated




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance

**Material Application**  
 Attaches metal to metal.



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 1-1/4	5	H5C	3.5M	39	.125 - .500	H5CV	400	H5CI	100
12-24 x 1-1/2	5	H52C	2.5M	33	.125 - .500	H52CV	400	H52CI	80
12-24 x 2	5	H53C	2M	33	.125 - .500	H53CV	300	H53CI	60
12-24 x 3	5	H54C	1M	23	.125 - .500	H54CV	200	H54CI	40
1/4-20 x 3	5	H543C	1M	34	.125 - .500	H543CV	125	H543CI	25
1/4-20 x 4	5	H544C	.5M	22	.125 - .500	H544CV	100	H544CI	25
1/4-20 x 5	5	H545C	.5M	26	.125 - .500	H545CV	100	H545CI	20
1/4-20 x 6	5	H546C	.5M	31	.125 - .500	H546CV	75	H546CI	N/A
1/4-20 x 8	5	H548C	.25M	20	.125 - .500	H548CV	N/A	H548CI	N/A

### Unslotted Indented Hex Washer Head w/Bonded Washer, Strong-Shield Coated




- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance

**Material Application**  
 Attaches metal to metal.



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 7/8	4	HA4C	3M	38	.125 - .250	9/16" O.D.	HA4CV	400	HA4CI	80

### Unslotted Indented Hex Washer Head w/Bonded Washer, Strong-Shield Coated



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance

**Material Application**  
 Attaches metal to metal.



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Washer	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 1-1/4	5	HA5C	3M	42	.125 - .500	9/16" O.D.	HA5CV	375	HA5CI	75
12-24 x 1-1/2	5	HA52C	2.5M	41	.125 - .500	9/16" O.D.	HA52CV	300	HA52CI	60
12-24 x 2	5	HA53C	2M	38	.125 - .500	9/16" O.D.	HA53CV	250	HA53CI	50
12-24 x 3	5	HA54C	1M	28	.125 - .500	9/16" O.D.	HA54CV	200	HA54CI	40

\*Carton weights are approximate and may vary.

Note: 5lb. boxes sold 6 per case. 1lb. boxes sold 20 per case.




**STRONG-POINT™**  
**Drywall**

**STRONG-POINT®**

Get the Point. Strong-Point.

### Phillips Pancake Head, Strong-Shield Coated



- Multipurpose sheet metal screw
- Meets ASTM A 510 for carbon steel
- Exceeds 1,000/hr. salt spray resistance
- Rust/Acid Rain Protection
- ACQ Compatible



#### Material Application

Attaches panel clips to wood.

Size	Bulk Part No	Bulk Qty	Lbs*	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-12 x 1	108PCC	5M	34	108PCCV	625	108PCCI	125
10-12 x 1-1/2	112PCC	3M	28	112PCCV	500	112PCCI	100

\*Carton weights are approximate and may vary.


Note: 5lb. boxes sold 6 per case. 1lb. boxes sold 20 per case.

**STRONG-POINT™**  
**Stainless**

**STRONG-POINT®**

Get the Point. Strong-Point.

### 410 Stainless Steel Phillips/Square Drive Pancake Head, Strong-Shield Coated



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance

#### Material Application

Attaches panel clips to metal studs.



Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	5lb Part No	5lb Qty	1lb Part No	1lb Qty
10-16 x 1	3	4PC8	4M	30	.035 - .176	4PC8V	650	4PC8I	125


### 410 Stainless Steel Star Drive Flat Head Reamer w/Wings, Strong-Shield Coated



- Meets ASTM C 1513 for cold-formed steel framing connections
- Meets F.I.P.-1000.7 for torsional strength & drill speed
- Meets SAE J78 for performance & dimensional specifications
- Rust/Acid Rain Protection
- ACQ Compatible
- Exceeds 1,000/hr. salt spray resistance

#### Material Application

Attaches wood to metal.




Size	Pt	Bulk Part No	Bulk Qty	Lbs*	Drill Cap (in.)	Wood Range	5lb Part No	5lb Qty	1lb Part No	1lb Qty
12-24 x 2-1/2	4	4RT212	1M	21	.110 - .375	1/2" - 1-1/2"	4RT212V	250	4RT212I	50
1/4-20 x 2-3/4	4	4RT234	.8M	24	.110 - .375	1/2" - 1-3/4"	4RT234V	160	4RT234I	30
1/4-20 x 3-1/4	4	4RT314	.5M	17	.110 - .375	3/4" - 2-1/4"	4RT314V	125	4RT314I	25

\*Carton weights are approximate and may vary.

Note: 5lb. and 1lb. Stainless Steel boxes sold per case or individually.

**Four Layers of**  
**Corrosion Protection!**

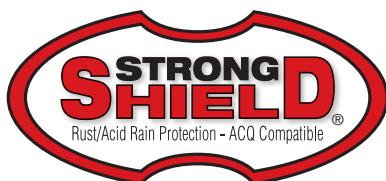

- High degree of corrosion resistance
- Exceeds 1,000/hr. Salt Spray Resistance
- Rust/Acid Rain Protection
- ACQ Compatible

Experience the Difference  
with **STRONG-POINT®**  
Professional Grade Fasteners