

Welcome to the RED HEAD[®] Product and Resource Book

Our Product and Resource Book is not just a catalog of the quality RED HEAD Anchoring Systems so many of you have come to rely on, but a resource guide to give you the information you need to help you work better, faster and easier.

This highly detailed Application Section allows you to look up your trade or specialty, view a variety of practical applications and receive simple product recommendations. Along with the product recommendations you'll notice page numbers for easy reference to the product selection and specifications pages.

We are continuing the consolidation of our Adhesive Anchoring System under the RED HEAD brand name. The adhesive anchoring products and formulas remain, providing versatile solutions.

As always, this Product and Resource Book continues to provide a wealth of valuable information including: product approvals/listings, applications, selection charts, performance tables and installation steps.

Remember, if you ever need more information about ITW RED HEAD products, technology and service, contact your local distributor, or look on the back cover for a complete listing of ITW RED HEAD facilities. We welcome your calls and feedback, and look forward to answering any questions you might have.

www.itwredhead.com

Table of Contents

Fastening Applications Guide

Curtain Wall Applications	3
Electrical Contractor Applications	4
Mechanical Contractor Applications	5
Drywall Contractor and Carpenter Applications	6
Acoustical Ceiling Installer Applications	7
Steel Erector Applications	8
Concrete and Masonry Contractor Applications	9
Water & Waste Water Treatment Applications	10
Highway and Bridge Contractor Applications	11
General Contractor Applications	12
Material Handling Applications	13
Specialty Applications	14

Anchoring Working Principles	15
Anchoring Selection Chart	18
Truspec Software	19

RED HEAD Adhesive Anchoring Systems

Adhesive Anchoring Selection Guide	21
A7+ Adhesive	23
C6+ Adhesive	39
G5+ Adhesive	50
Umbrella Inserts and Short Screens	60
Screen Tubes	63
Accessories	65

RED HEAD Mechanical Anchoring Systems

Mechanical Anchoring Selection Guide	66
Trubolt Wedge Anchors	68
Large Diameter Tapcon (LDT) Anchors	74
Multi-Set II Drop-in Anchors	80
Dynabolt Sleeve Anchors	85
Tapcon Concrete and Masonry Anchors (Original & 410 SS)	88
Tapcon Maxi-Set	92
Tapcon SCOTS®	94
Tapcon XL	96
Tapcon StormGuard	98


Anchoring Systems



Trubolt

LDT


Drop-In

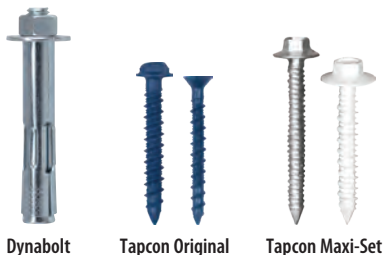

Dynabolt

Tapcon Original

Tapcon Maxi-Set

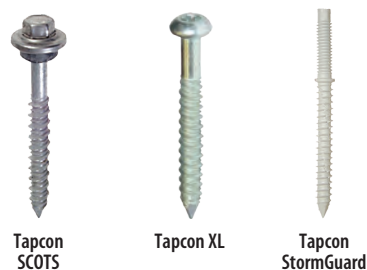

Tapcon SCOTS

Tapcon XL


Tapcon StormGuard

The information and recommendations in this document are based on the best information available to us at the time of preparation. We make no other warranty, expressed or implied, as to its correctness or completeness, or as to the results or reliance of this document.



RED HEAD®

Fastening Applications Guide

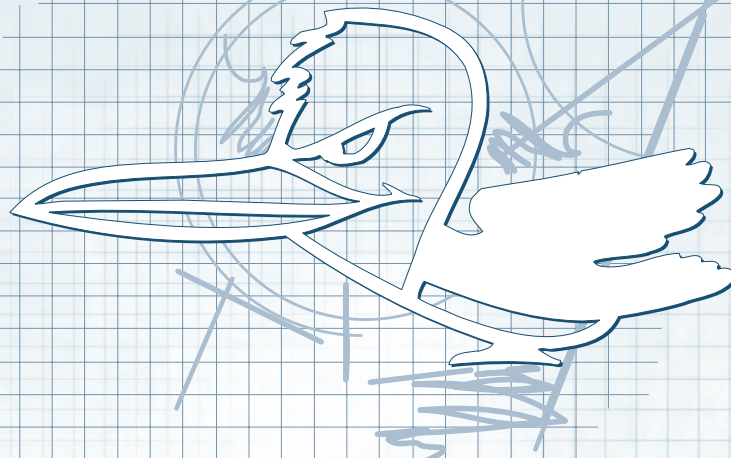

This section highlights a variety of trade applications and provides information that will assist you in selecting the best fastening system for your application.

While these are not to be considered complete, they will give you an idea of how contractors use our products.

For example, on the Electrical Contractor page, you will find applications, such as junction box/panel boards and

suspended lighting. Next to the diagrams are the product name(s) and page number in this catalog where you will find complete information on these products needed for that particular application.

Curtain Wall Applications



Curtain Wall

Pg. 74




- Design allows for expansion and contraction of the frame
- Finished head
- Works in multiple base materials

Pg. 68



- Can be set thru fixture
- Available in stainless steel
- Can be set with torque wrench

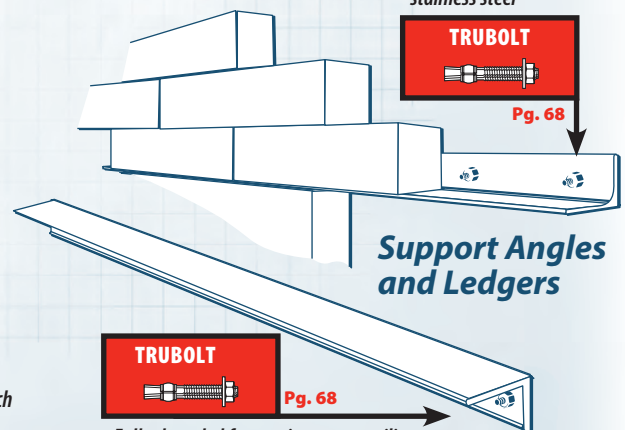


- Fully threaded for maximum versatility
- Available in carbon steel, hot dipped galvanized or stainless steel



Pg. 68

Support Angles and Ledgers



Pg. 68

- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

For seismic recognition, see ICC-ES evaluation reports.

For installation guidelines for your application, please contact our Technical Services Department at 1-800-848-5611.



RED HEAD®

Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



RED HEAD®

Electrical Contractor Applications

Junction Box/ Panel Boards


Pg. 88

TAPCON



- Counter sunk flathead style for flush installation
- Works in concrete or block
- Available in 3/16" and 1/4" diameters

Transformers Switch Gear Electrical Enclosures




Pg. 68

TRUBOLT



- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

Unistrut-Cable Tray/Conduit

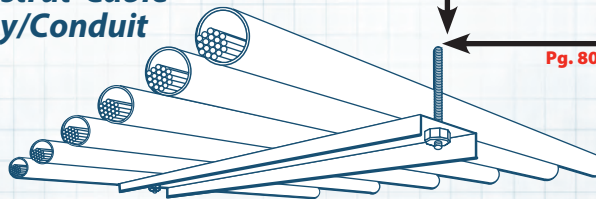

- Ideal for closely spaced groups of anchors

A7+ ADHESIVE


Pg. 23

- Available in special 3/8" & 1/2" version for precast planks
- Available in sizes 1/4" thru 3/4" internal thread diameters

MULTI-SET DROP-IN

Pg. 80

Suspended Pipe or Conduit

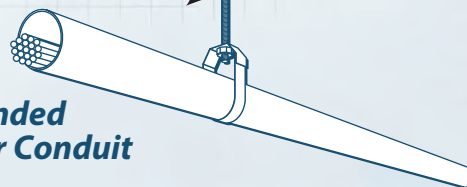


- Available in special 3/8" & 1/2" version for precast planks
- Available in sizes 1/4" thru 3/4" internal thread diameters

MULTI-SET DROP-IN



Pg. 80

Suspended Lighting

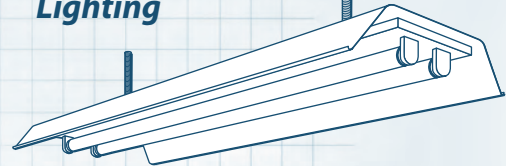

- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

TRUBOLT



Pg. 68


Pg. 80

MULTI-SET DROP-IN



- Available in special 3/8" & 1/2" version for precast planks
- Available in sizes 1/4" thru 3/4" internal thread diameters

Light Standards Poles



Pg. 39/50

C6+/G5+ ADHESIVE



- "Stress Free" anchor—can be used close to edges or in close spacing pattern

DYNABOLT



Pg. 85

- Counter sunk and threshold head styles also available
- Works in concrete, block and brick

Wall Mounted Lighting



Pg. 74

LDT



- Works in solid concrete, hollow block and brick
- Cuts a thread into the mounted surface
- Finished head appearance

For seismic recognition, see ICC-ES evaluation reports.

For installation guidelines for your application, please contact our Technical Services Department at 1-800-848-5611.

Mechanical Contractor Applications

NOTE:

C6+ and G5+ both can be used for oversized holes when repairing pumps and machinery anchoring.

Machinery and Equipment

Pg. 74

LDT

- Removable

Pg. 39/50

C6+/G5+ ADHESIVE

- High Load Capacity
- Suitable for use close to edge of slab
- Ideal for moderate to hot climates
- Can be used for oversized holes

Pg. 23

A7+ ADHESIVE

- Vibration resistant
- Quick-Cure

Pumps

Pg. 39/50

C6+/G5+ ADHESIVE

- Corrosion resistant
- Vibration resistant
- NSF Approved

Pg. 23

A7+ ADHESIVE

- Quick-Cure
- Vibration Resistant

- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

TRUBOLT

Pg. 68

TAPCON

Pg. 88

Ductwork/HVAC

Heavy-Duty Pipe Support

Pipe/Strut Attachment

Pg. 80

MULTI-SET DROP-IN

- Available in special 3/8" & 1/2" version for prestressed concrete
- Available in 1/4" thru 3/4" internal thread diameters

Pg. 68

TRUBOLT

- Available in special 3/8" & 1/2" version for prestressed concrete
- Available in 1/4" thru 3/4" internal thread diameters

MULTI-SET DROP-IN

Pg. 80

Pipe Support, Fire Sprinkler

Pg. 39/50

C6+/G5+ ADHESIVE

- High load capacity
- Corrosion resistant
- NSF Approved

Pg. 68

TRUBOLT

- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

For seismic recognition, see ICC-ES evaluation reports.

For installation guidelines for your application, please contact our Technical Services Department at 1-800-848-5611.



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



Drywall Contractor & Carpenter Applications

Window and Door Frames



- Counter sunk and threshold head styles
- Works in concrete, block and brick



- Works in solid and hollow base material
- Removable
- Can be set flush with Phillips head if counter sunk

Drywall Track

Ceiling Track

Floor Track




- Simple to use—drill hole and screw in

Pg. 88



- Counter sunk flathead style for flush installation
- Works in concrete or block
- Available in 3/16" and 1/4" diameters


Furring Strips

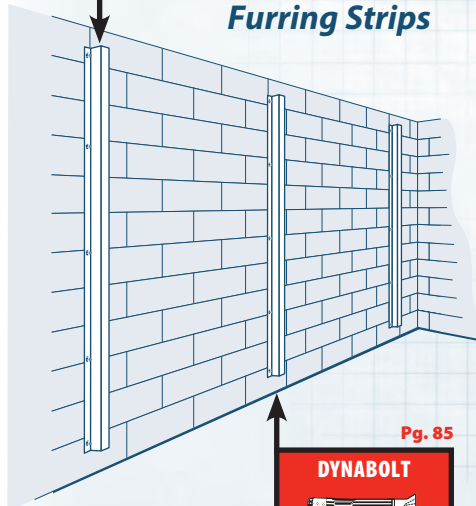

- Counter sunk and threshold head styles
- Works in concrete, block and brick


Framing/Sill Plating

Pg. 68



- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

- Drill hole, install by hand or impact wrench



Pg. 39/50



- High load capacity
- Corrosion resistant
- NSF Approved
- Used for slower cure projects

Pg. 23



- Fast cure
- Works in damp wet conditions
- Use A7+ with threaded rod for this application

For seismic recognition, see ICC-ES evaluation reports.

For installation guidelines for your application, please contact our Technical Services Department at 1-800-848-5611.

Acoustical Ceiling Installer

Applications

- Single piece design
- Drill hole, hammer wedge into hole, pull down with claw hammer

TIE WIRE WEDGE


Pg. 70

- Tapcon used with angle clip
- Simple to use, drill hole and drive Tapcon

TAPCON

Pg. 88

Acoustical Ceiling

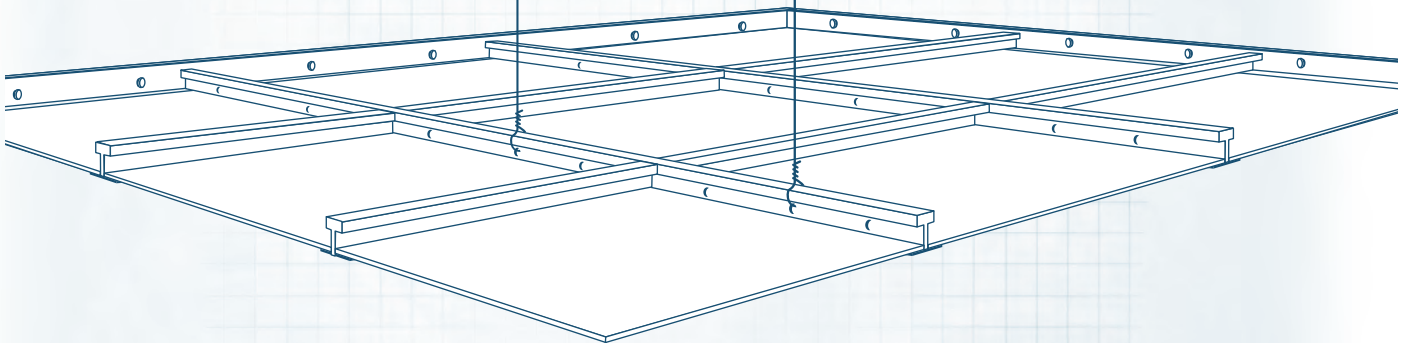

For seismic recognition, see ICC-ES evaluation reports.

For installation guidelines for your application, please contact our Technical Services Department at 1-800-848-5611.



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



Steel Erector Applications

Steel Beams/Columns

Pg. 39/50

C6+/G5+ ADHESIVE

- Longer working time for positioning of steel
- Can be used in oversized holes
- Works in wet/damp conditions

Pg. 23

A7+ ADHESIVE

- Ideal for closely spaced groups of anchors

Pg. 68

TRUBOLT

- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

Stairs and Ladders

- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

TRUBOLT

Pg. 68

Pg. 23

A7+ ADHESIVE

- Fast cure
- Works in damp wet conditions
- Use A7+ with threaded rod for this application

Pg. 74

LDT

- Finished head
- Removable
- For use in concrete

Ornamental Iron

DYNABOLT

Pg. 85

- Multiple head styles
- Ideal for concrete, brick and block
- Carbon and stainless steel

Pg. 23

A7+ ADHESIVE

- Fast cure
- Works in damp wet conditions
- Use A7 with threaded rod for this application

- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

Hand Railings

TRUBOLT

Pg. 68

- Quick cure
- Works in damp wet conditions
- Works in concrete & masonry

Pg. 23

A7+ ADHESIVE

DYNABOLT

Pg. 85

- Multiple head styles
- Ideal for concrete, brick and block
- Carbon and stainless steel

Protective Railings and Fencing

- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

TRUBOLT

Pg. 68

Pg. 74


LDT

- Finished head
- Removable
- For use in concrete

For seismic recognition, see ICC-ES evaluation reports.

For installation guidelines for your application, please contact our Technical Services Department at 1-800-848-5611.

Concrete & Masonry Contractor Applications

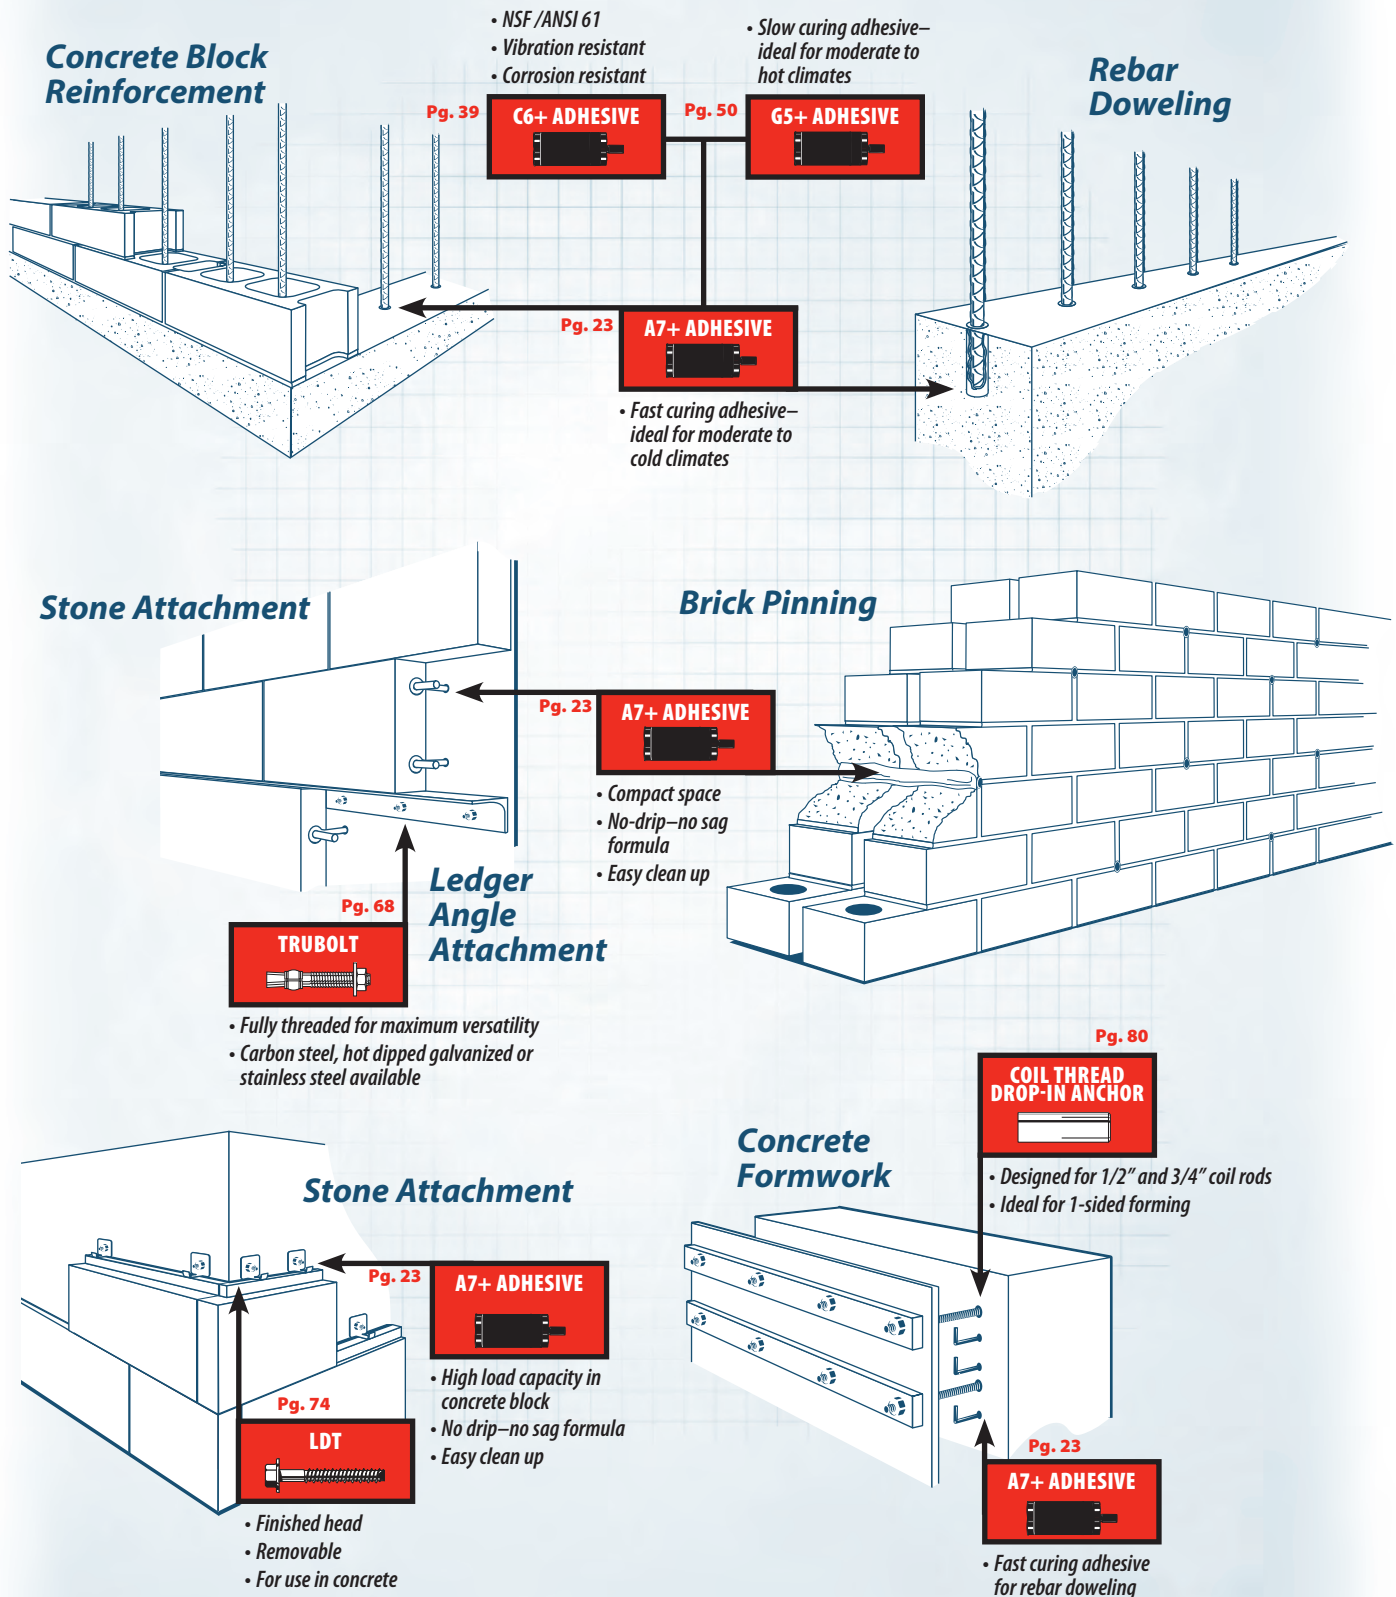

For seismic recognition, see ICC-ES evaluation reports.

For installation guidelines for your application, please contact our Technical Services Department at 1-800-848-5611.




Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



Water & Waste Water Treatment Applications

Weirs and Gates


Bar Screens

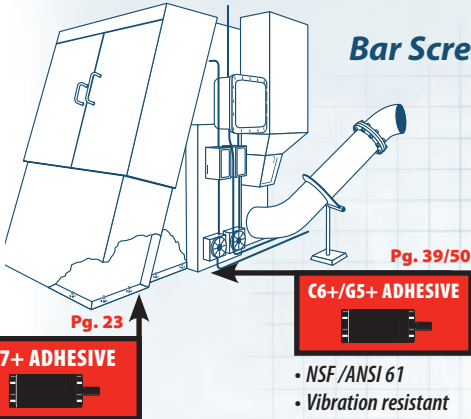

- NSF/ANSI 61
- Vibration resistant
- Corrosion resistant

- Fast dispensing, fast curing adhesive
- Works in wet conditions
- NSF Approved


Covers and Domes

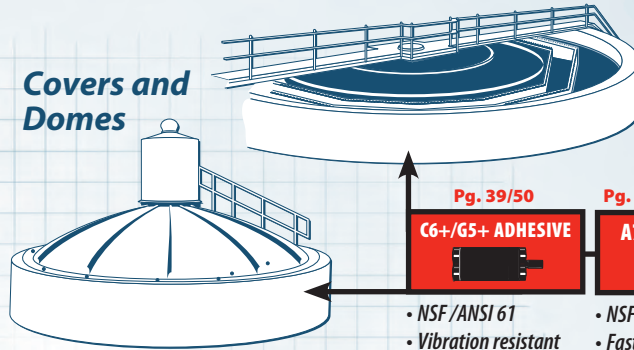

- NSF/ANSI 61
- Vibration resistant
- Corrosion resistant

- NSF/ANSI 61
- Fast dispensing, fast curing adhesive
- Works with epoxy coated dowels


Railings and Ladders

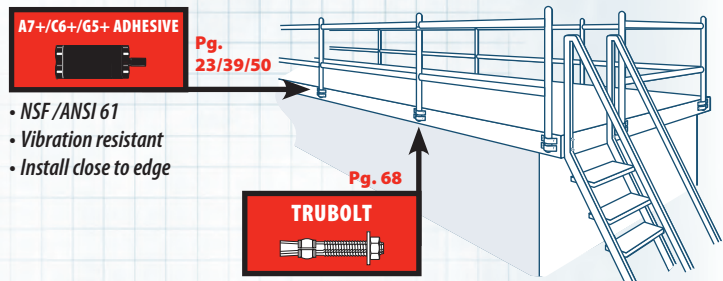

- NSF/ANSI 61
- Vibration resistant
- Install close to edge

- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available


Instrumentation and Controls

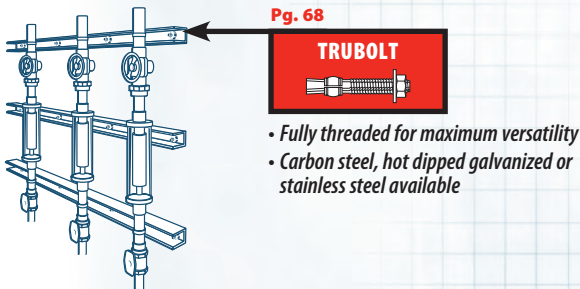


- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

Pipe Supports

- Special 3/8" version for prestressed concrete
- Available in 1/4" thru 3/4" internal diameters
- Stainless steel available
- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

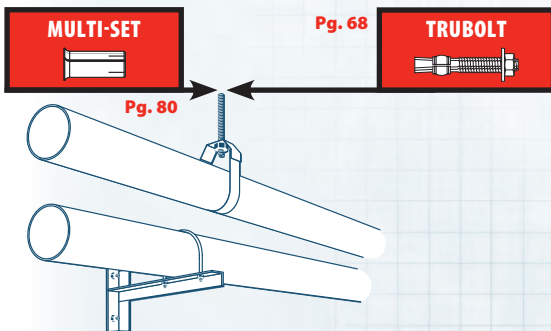


Conveyors

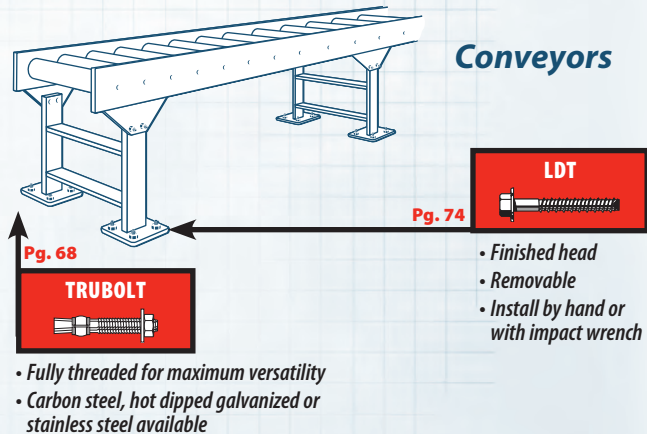

- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

- Finished head
- Removable
- Install by hand or with impact wrench


Diffusers

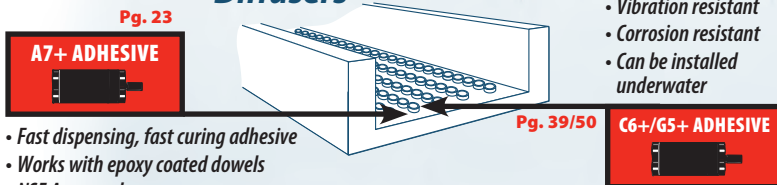

- Fast dispensing, fast curing adhesive
- Works with epoxy coated dowels
- NSF Approved

- NSF/ANSI 61
- Vibration resistant
- Corrosion resistant
- Can be installed underwater

PUMPS

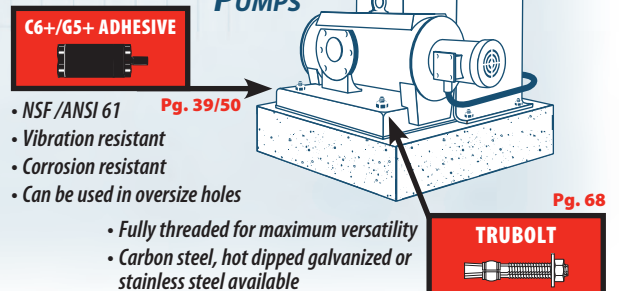

- NSF/ANSI 61
- Vibration resistant
- Corrosion resistant
- Can be used in oversize holes

- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

For seismic recognition, see ICC-ES evaluation reports.

For installation guidelines for your application, please contact our Technical Services Department at 1-800-848-5611.

Highway & Bridge Contractor Applications

Concrete Pavement Lane Addition and Joint Repair

Pg. 23/39/50



- Works with epoxy coated dowels

Pg. 80



- Lipped anchor—remains flush with face of concrete

"J" Bolt

- With or without lip

Down Spouts


- Can be used overhead

A7+/C6+/G5+ ADHESIVE

Pg. 23/39/50

Bridge Mounted Signs

Pg. 68



- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

Suspended Conduit

Pg. 23



- Fast curing
- Can be used in damp or water filled holes

Wire Loops

Glare Screens

Mile Markers


Rebar Doweling

Pg. 23/39/50



- Can be used in damp or water filled holes

Pg. 68




- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

Temporary Fastening of Jersey Barriers to Concrete

Pg. 68

Pg. 74



- Finished head
- Removable
- Install by hand or with impact wrench

- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available
- Can be used in wet/damp conditions
- Fast cure
- Easy to pump

A7+ ADHESIVE

Pg. 23

Guard Rail Attachments to Bridges

A7+ ADHESIVE

Pg. 23



- Can be used in wet/damp conditions
- Fast cure
- Easy to pump
- Suitable for use close to edge of slab

Steel Guard Rail Post Attachment to Concrete

Pg. 39/50



- High Load Capacity
- Suitable for use close to edge of slab
- Ideal for moderate to hot climates
- Can be used for oversized holes

For seismic recognition, see ICC-ES evaluation reports.

For installation guidelines for your application, please contact our Technical Services Department at 1-800-848-5611.

Department of Transportation Approvals & Listings

For approvals contact local engineering on a per project basis.

Call your local RED HEAD sales person for more information.



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



General Contractor Applications

Replacement of Misplaced Anchors

Pg. 39/50

C6+/G5+ ADHESIVE

- Ideal for hot climates—extended working time formula

Pg. 74

LDT

Pg. 23

A7+ ADHESIVE

- Damp holes or underwater
- Dispenses and cures faster in cold weather

Cast-In-Place Bolt in Wrong Location

Tilt Wall Anchorage

Pg. 68

TRUBOLT

- Fully threaded for maximum versatility
- Carbon steel, hot dipped galvanized or stainless steel available

Seismic Hold Downs

- Damp holes or underwater
- Fastest cure (35 min. at 60°F)
- Dispenses and cures faster in cold weather

Pg. 23

A7+ADHESIVE

Pg. 23

A7+ ADHESIVE

- Damp holes or underwater
- Fastest cure (35 min. at 60°F)
- Dispenses and cures faster in cold weather

Replacement of Damaged Anchors

Pg. 39

C6+ ADHESIVE

- NSF Approved
- Vibration resistant
- Corrosion resistant
- Can be used in oversize holes

Pg. 39/50

C6+/G5+ ADHESIVE

- Extended working time—ideal for warm to hot climates
- Can be used in oversize holes

Damaged Cast-In-Place Anchor

A7+/C6+/G5+ ADHESIVE

Pg. 23/39/50

- High Load Capacity
- Suitable for use close to edge of slab
- Ideal for moderate to hot climates
- G5+ and C6+ can be used for oversized holes

For seismic recognition, see ICC-ES evaluation reports.

For installation guidelines for your application, please contact our Technical Services Department at 1-800-848-5611.

Material Handling Applications

Overhead Doors

LDT

Pg. 74

- Hand installation
block or concrete

Pg. 23/60

A7+ ADHESIVE WITH UMBRELLA

- High load in hollow
block or concrete

Shelving

- Removable
- Easy to install
- Single piece design

LDT

Pg. 74

Pg. 68

TRUBOLT

- Fully threaded for maximum versatility
- Available in carbon steel, hot dipped galvanized or stainless steel

Rails

LDT

Pg. 74

- Finished head
- Removable
- Installs with impact wrench

Pg. 23

A7+ ADHESIVE

- Fast curing
- Impact resistant
- Non-sag formula

Pg. 23

A7+ ADHESIVE

- Fast curing
- Impact resistant
- Non-sag formula

Pg. 39/50

C6+/G5+ ADHESIVE

- Extended working time—ideal for warm to hot climates
- Can be used in oversize holes

LDT

Pg. 74

- Finished head
- Removable
- Available with Envirex corrosion resistant high finish

Dock Bumpers

Pg. 74

LDT

- Finished head
- Removable
- Installs with impact wrench
- Single piece design

Conveyors

Pg. 68

TRUBOLT

- Fully threaded for maximum versatility
- Available in carbon steel, hot dipped galvanized or stainless steel

Racks

TRUBOLT

Pg. 68

- Fully threaded for maximum versatility
- Available in carbon steel, hot dipped galvanized or stainless steel

LDT

Pg. 74

- Finished head
- Removable
- Installs with impact wrench
- Single piece design

For seismic recognition, see ICC-ES evaluation reports.

For installation guidelines for your application, please contact our Technical Services Department at 1-800-848-5611.




Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



Specialty Applications

Stadium Seating

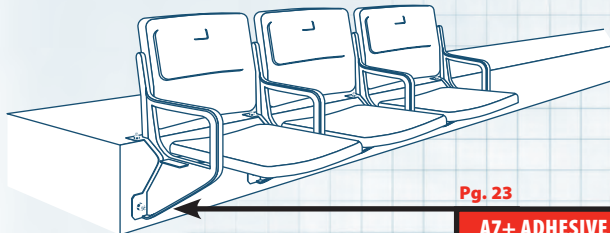

Pg. 68

TRUBOLT



- Fully threaded for maximum versatility
- Available in carbon steel, hot dipped galvanized or stainless steel


Pg. 23

A7+ ADHESIVE



- Corrosion resistant
- Normal weight or lightweight concrete
- Used in major stadiums across the country

Foundation Wrap

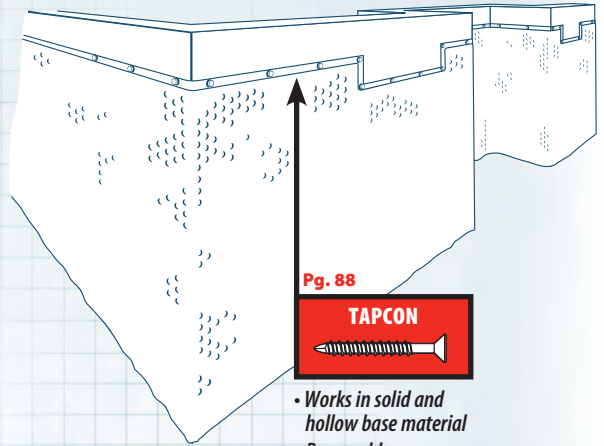


Pg. 88

TAPCON




- Works in solid and hollow base material
- Removable

Expansion Joints



Pg. 68

- Fully threaded for maximum versatility
- Available in carbon steel, hot dipped galvanized or stainless steel

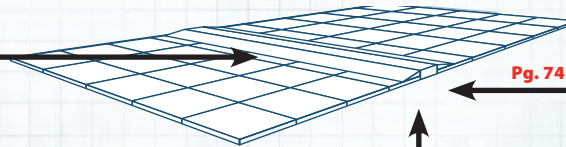

Pg. 39/50

C6+/G5+ ADHESIVE



- High load capacity
- Suitable for use close to edge of slab


LDT



Pg. 74

- Finished head
- Removable
- Installs by hand or with impact wrench

Flooring Systems

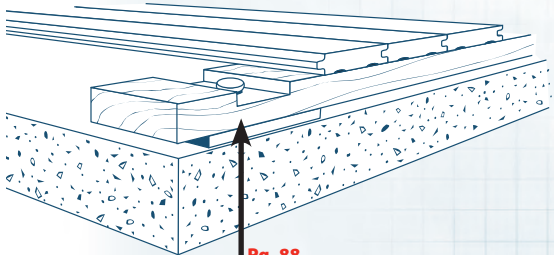


Pg. 88

TAPCON



- Works in solid and hollow base material
- Removable
- Can be set flush with Phillips head if countersunk

Underwater Installation

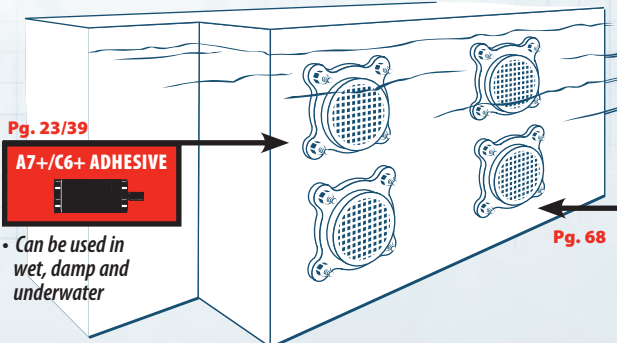

Pg. 23/39

A7+/C6+ ADHESIVE



- Can be used in wet, damp and underwater

TRUBOLT



Pg. 68

- Fully threaded for maximum versatility
- Available in carbon steel, hot dipped galvanized or stainless steel

For seismic recognition, see ICC-ES evaluation reports.


For installation guidelines for your application, please contact our Technical Services Department at 1-800-848-5611.

Anchoring Working Principles



The Inside Story About Mechanical and Adhesive Anchors

**Types, Base Materials,
Installation Procedures
and More**



Top View

For attachments to single face of block, see page 60 for information on “umbrella anchors” and “short screens”

HOLLOW CONCRETE BLOCK

Maximum holding strength in concrete block can be obtained by fastening to both the front and back of the block using an adhesive screen tube and threaded rod.

TYPES OF ANCHORS



Expansion Type—

Tension loads are transferred to the base material through a portion of the anchor that is expanded inside the drill hole.


Examples: Red Head Trubolt, Dynabolt Sleeve Anchor and Multi-Set II Drop-In Anchor



Adhesive Type—

Resistance to tension loads is provided by the presence of an adhesive between the threaded rod (or rebar) and the inside walls of the drill hole.


Examples: A7+, C6+, and G5+ Adhesives



Keying Type—

Holding strength comes from a portion of an anchor that is expanded into a hollow space in a base material that contains voids such as concrete block or brick.

Examples: Adhesive Umbrella Anchors

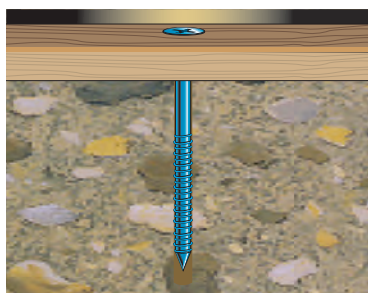

Mechanical Interlocking Type—

Tension loads are resisted by threads on the fastener engaging with threads cut into the base material.

Examples: LDT, Tapcon and E-Z Ancors




Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



Anchoring Working Principles cont.

BASE MATERIALS

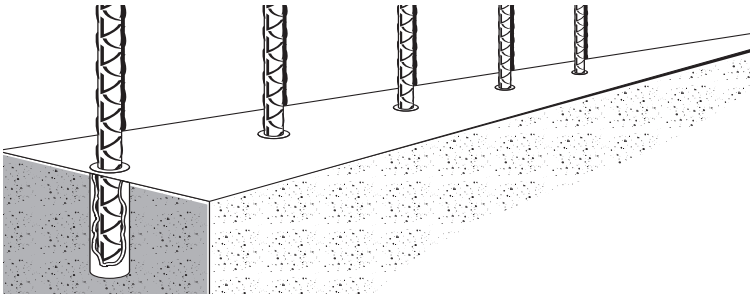


Concrete

Normal Weight Concrete is made from Portland cement, coarse and fine aggregates, water and various admixtures. The proportioning of these components controls the strength of the concrete. In the United States, concrete strength is specified by the compressive strength* of concrete test cylinders. These test cylinders measure six inches in diameter by 12 inches in length and are tested on the 28th day after they are produced.

Lightweight Concrete consists of the same components (cement, coarse and fine aggregates, water and admixtures) as normal weight concrete, except it is made with lightweight aggregate. One of the most common uses of lightweight concrete has been as a structural fill of steel decking in the construction of strong, yet light floor systems.

Typical fasteners for both normal weight and lightweight concrete include Trubolt+ Wedge Anchors, LDT Self-Threading Anchors, Dynabolt Sleeve Anchors, Multi-Set II Drop-In Anchors and Adhesive Anchoring Systems.

* Compressive strengths shown in this catalog were the actual strengths at the time of testing. The load values listed were determined by testing in un-reinforced concrete.

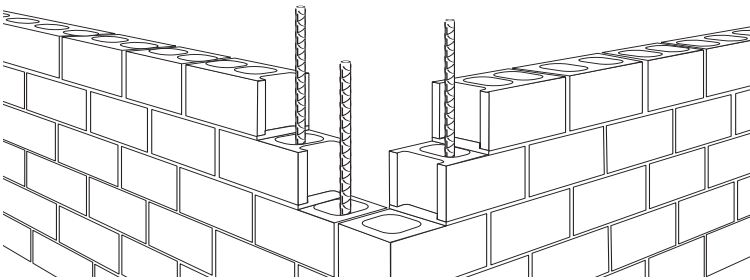


Masonry

Grout-Filled Concrete Block consists of three components: concrete, mortar and grout. The mortar is designed to join the units into an integral structure with predictable performance properties. Typical fasteners for grout-filled block include Dynabolt Sleeve Anchors, and A7+/C6+/G5+ Adhesive Anchoring Systems.


Hollow Concrete Block, Brick and Clay Tile are grouped together because they require special anchoring products that can be installed into a substrate that contains voids and still provide reliable holding values. Typical fasteners used in hollow block, brick and clay tile include Dynabolt Sleeve Anchors, Tapcon Self-Tapping Concrete Anchors, Adhesives with Screen Tubes and Adhesives used with the Umbrella Anchor.

INSTALLATION PROCEDURES

Anchor drill holes are typically produced using carbide tipped drill bits and rotary hammer drills. Look at the product sections of this catalog for the correct drill hole diameter and depth of each type of anchoring system.

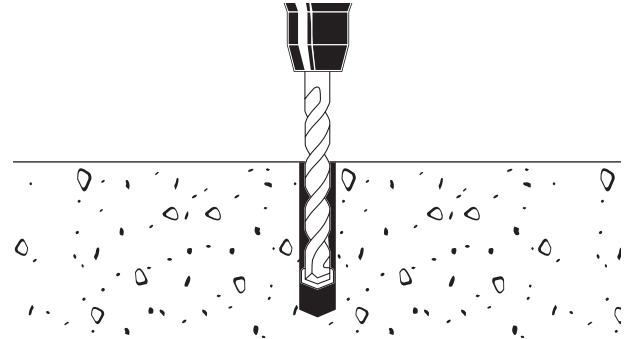

Careful cleaning of the anchor drill hole is important in order to obtain the best possible functioning of the anchor system. For each product in this catalog, detailed installation instructions are provided. Suggested clamping force and curing times (for adhesive anchors) are also provided.

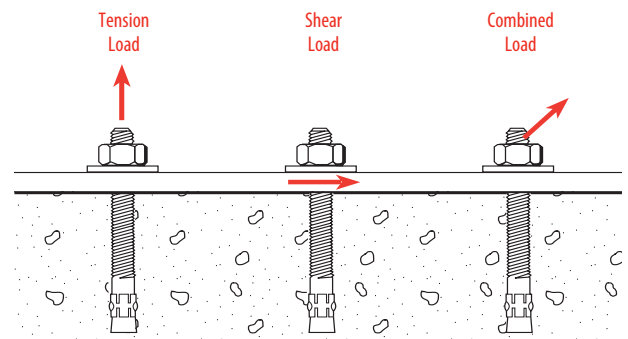

Loading

Holding values for the following types of loading are provided in this catalog:

■ Tension loads—

when load is applied along the axis of the anchor

■ Shear loads—


when the loads are applied perpendicular to the axis of the anchor

■ Combined loads—

when both tension and shear loads are applied to an anchor, a combined loading equation is provided to determine the maximum loads that can be applied to the anchor at the same time


MODES OF FAILURE

When anchors are loaded to their maximum capacity, several different types (modes) of failure are possible depending on the type of anchor, strength of the base material, embedment depth, location of the anchor, etc. Common modes of failure include:

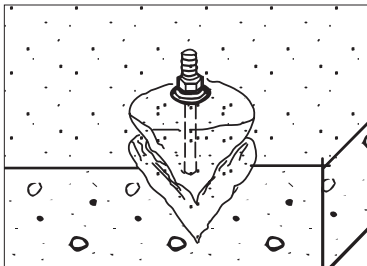


Concrete Spall Cone—

Occurs at shallow embedments where the resistance of the base material is less than the resistance of the anchor and the base material fails.

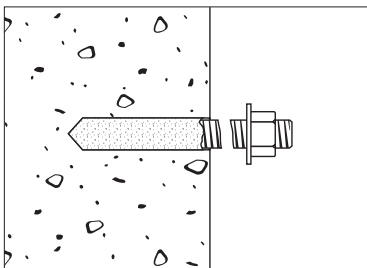


Steel Breakage—

The capacity of the anchorage exceeds the tensile or shear strength of the steel anchor or rod material.

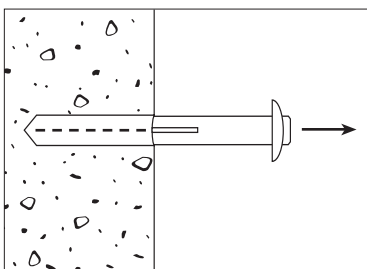


Anchor Pullout—

Base material adjacent to the extension portion of an anchor crushes, resulting in the anchor pulling out of the hole until the capacity of the spall cone is reached, at which point the concrete will spall. This type of failure happens more commonly when anchors are set with deep embedment depths.

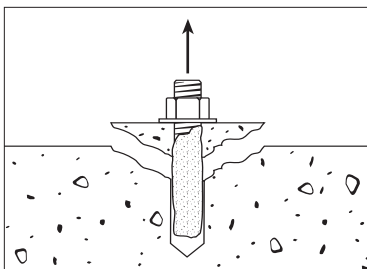

Bond Failure—

Shear failure of the adhesive at rod-adhesive interface or adhesive-base material interface. Occurs more commonly in deep embedments using high strength steel rods.

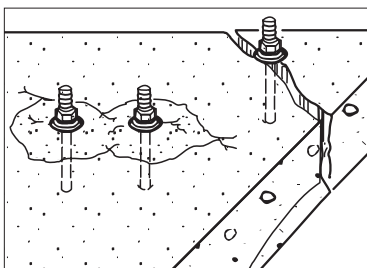

Edge Distance and Spacing Reduction—

Reduces the holding values, when anchors are placed too close to the edge. This also occurs when two or more anchors are spaced closely together. See suggested edge distance, anchor spacing distances and reduction values in the product sections.


Because applications vary, ITW RED HEAD cannot guarantee the performance of this product. Each customer assumes all responsibility and risk for the use of this product. The safe handling and the suitability of this product for use is the sole responsibility of the customer. Specific job site conditions should be considered when selecting the proper product. Should you have any questions, please call the Technical Assistance Department at 800-848-5611.

Anchoring Selection Chart

Anchor Selection Chart		Adhesive Anchors			Screw Anchors		Expansion Anchors		
		A7+	C6+	G5+	LDT	Tapcon	Torque-Set		Hammer-Set
							Trubolt	Dynabolt	Drop-In
Base Material	Uncracked Concrete	A7+	C6+	G5+	LDT	TAP	TRU	DYNA	DROP
	Cracked Concrete	A7+	C6+	G5+					
	Lightweight Concrete	A7+	C6+	G5+		TAP	TRU	DYNA	DROP
	Lightweight Concrete on Metal Deck				LDT		TRU		DROP
	Hollow Core Concrete								DROP
	Grout Filled Concrete Block	A7+	C6+		LDT			DYNA	
	Hollow Concrete Block	A7+	C6+		LDT	TAP		DYNA	
	Solid Brick	A7+	C6+						
	Drywall								
Hole Conditions	Oversized Holes	A7+	C6+						
	Water Saturated Concrete	A7+	C6+	G5+	LDT	TAP	TRU	DYNA	DROP
	Water-filled Holes	A7+	C6+	G5+	LDT	TAP	TRU	DYNA	DROP
	Submerged	A7+	C6+	G5+					
	No Hole Cleaning Procedures								
Application Requirements	Through Fixture Fastening	A7+	C6+	G5+	LDT	TAP	TRU	DYNA	
	Immediate Loading				LDT	TAP	TRU	DYNA	DROP
	Finished Head or Flush Surface				LDT	TAP		DYNA	DROP
	Easy to Remove				LDT	TAP			
	Seismic	A7+	C6+	G5+					
	Cyclic Loading	A7+	C6+	G5+			TRU		
	High Temperature Resistance	A7+	C6+	G5+	LDT	TAP	TRU	DYNA	DROP
	Sustained Load	A7+	C6+	G5+	LDT	TAP	TRU	DYNA	DROP
Corrosion Resistance	Zinc Plated	A7+	C6+	G5+			TRU	DYNA	DROP
	Hot-Dipped Galvanized	A7+	C6+	G5+			TRU		
	304 Stainless Steel	A7+	C6+	G5+			TRU	DYNA	
	316 Stainless Steel	A7+	C6+	G5+			TRU		DROP
	410 Stainless Steel	A7+	C6+	G5+	LDT	TAP			
	Trade Secret Coating				LDT	TAP			
Anchor Diameters	3/16"					TAP			
	1/4"	A7+				TAP	TRU	DYNA	DROP
	5/16"					TAP		DYNA	
	3/8"	A7+	C6+	G5+	LDT		TRU	DYNA	DROP
	1/2"	A7+	C6+	G5+	LDT		TRU	DYNA	DROP
	5/8"	A7+	C6+	G5+	LDT		TRU	DYNA	DROP
	3/4"	A7+	C6+	G5+	LDT		TRU	DYNA	DROP
	7/8"	A7+	C6+	G5+					
	1"	A7+	C6+	G5+			TRU		
	1-1/4"	A7+	C6+	G5+					
	Rebar Sizes	#3-11	#3-11	#3-10					
At 70°F	Working Time (minutes)	5	16	16					
	Cure Time (minutes)	45	390	480					

Design concrete anchoring connections in minutes!

Use Truspec to become an expert who can easily design post-installed concrete anchoring connections in accordance with ACI 318.

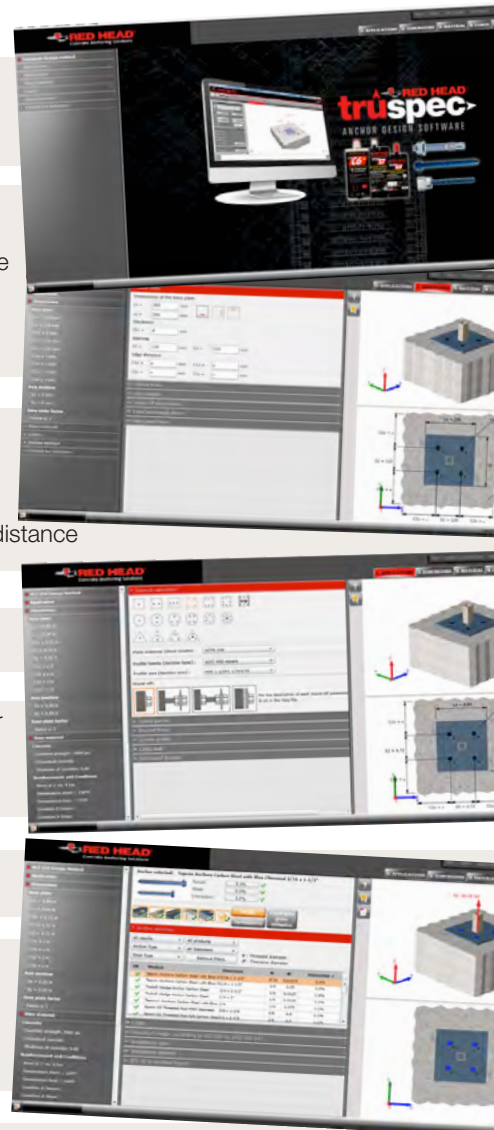

VIEW

- Customize anchor layouts or choose from a wide selection of pre-configured options
- Tips on how to navigate and use the Anchor Calculation Software

DESIGN

- Design post-installed anchor connections according to ACI 318
- Optimize performance via intuitive base plate thickness calculator and design comparison mode
- Design in accordance with ICC-ES AC 308 and ACI 355.4 adhesive temperature requirements

MODEL

- Select, sort, and filter according to the most efficient anchoring product type and size
- Attachment with single or multiple anchor points
- Simultaneous moment forces in x-, y-, z- axis
- Minimum edge distance
- Minimum anchor spacing distance

INTERACT WITH

- Real-time 3D animations and graphics

CALCULATE

- Critical values for total strength design of anchor connections
- Values in US Customary or Metric Units

PREDICT

- Mode of failure for anchor connections

RECOMMEND

- Most efficient anchoring method (adhesive or mechanical anchors)
- Most efficient anchor size

BUILD A PRINTED OR PDF REPORT

- Including Anchor Calculation Data
- Detailed Calculations for Anchor Design
- 3D Image of Anchor Calculation
- ESR Report(s)
- Code cross-references

Use TruSpec Anchor Calculation Software to become an expert on:

Adhesive Anchoring Solutions



A7+ Adhesive

- Fast Curing Hybrid Epoxy
- Can be used in more applications than the competition (including in saturated, water-filled and submerged holes)
- ICC-ES listed for cracked concrete, seismic conditions, and masonry



C6+ Adhesive

- Approved for use in core-drilled holes, even in cracked concrete
- Maximum Strength Epoxy
- ICC-ES listed for cracked concrete, seismic zones, and masonry
- European fire approval



G5+ Adhesive

- Medium-Duty Strength Epoxy
- Ideal for warm weather
- ICC-ES listed for cracked concrete and seismic conditions

Mechanical Anchoring Solutions

Red Head Trubolt Anchor



- Dependable wedge anchor

Threaded Rod Anchoring Solutions

Sammys for Cracked Concrete

- Self-tapping screw anchor for cracked concrete, seismic, and standard applications



CCST 516

- For vertical installation
- Seismic approved









SW-CCST 516

- For horizontal installation
- Seismic approved

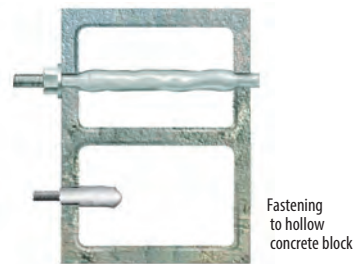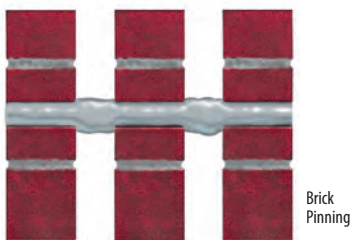Hollow Base Material Applications

Use the following accessories with the A7+ adhesive anchoring system for all of your hollow base material applications.



SYSTEM ACCESSORIES	KEY FEATURES	ULTIMATE TENSILE ^{1,2} PERFORMANCE (LBS.)				
<h2>Umbrella Anchor</h2> <div></div> <p>Umbrella Anchor</p> <p>Makes it possible to use adhesive for fastening to the face of hollow block or tile (see page 60-61)</p>	<ul style="list-style-type: none">Highest hold in hollow block1/4", 3/8", or 1/2" rodsFasten to front face of blocksCreates large bearing surface inside block to achieve high loads	<p>A7+</p> <table><tr><td>3,558</td><td>3,558</td></tr><tr><td>3/8"</td><td>1/2"</td></tr></table>	3,558	3,558	3/8"	1/2"
3,558	3,558					
3/8"	1/2"					
<h2>Nylon Screen Tubes</h2> <div></div> <p>Makes it possible to use adhesive for fastening to hollow block or brick walls (see page 64)</p>	<ul style="list-style-type: none">3/8" to 3/4" diameter sizes30%-50% lower cost than stainless screensSpecial design makes screens easier to insert through block or brickDoes not get bent or crushedCorrosion resistant	<p>A7+</p> <table><tr><td>2,360</td><td>2,647</td></tr><tr><td>3/8" x 8"</td><td>3/4" x 8"</td></tr></table>	2,360	2,647	3/8" x 8"	3/4" x 8"
2,360	2,647					
3/8" x 8"	3/4" x 8"					
<h2>Stainless Steel Screen Tubes</h2> <div></div> <p>Makes it possible to use adhesive for fastening to hollow block or brick walls (see page 64)</p>	<ul style="list-style-type: none">1/4" & 3/4" diameter sizesCorrosion resistantAvailable in 1/4" thicknesses	<p>A7+</p> <table><tr><td>2,360</td><td>2,647</td></tr><tr><td>3/8" x 8"</td><td>3/4" x 8"</td></tr></table>	2,360	2,647	3/8" x 8"	3/4" x 8"
2,360	2,647					
3/8" x 8"	3/4" x 8"					
<h2>Short Screen Tubes</h2> <div></div> <p>Makes it possible to use adhesive for fastening to the face of hollow block or tile (see page 61)</p>	<ul style="list-style-type: none">1/4", 3/8", 1/2", 5/8" diameter sizesFasten to front face of blockAnchor remains perpendicular in wall	<p>A7+</p> <table><tr><td>2,458</td><td>2,543</td></tr><tr><td>1/2"</td><td>5/8"</td></tr></table>	2,458	2,543	1/2"	5/8"
2,458	2,543					
1/2"	5/8"					

¹ Testing performed in hollow concrete block.

² Diameter x Embedment.

A7+

The Most Versatile Quick Cure Adhesive



A7P-10

A7P-28

APPLICATIONS / USES

- Concrete dowelling (slabs, walls, columns)
- Steel framing (columns, beams, ledgers)
- Brick pinning and CMU reinforcement
- Architectural metal fastening (railings, signage)
- Mechanical, electrical, and plumbing attachment
- Vibratory equipment anchoring
- Overhead and horizontal anchors

DESCRIPTION

Quick Curing Hybrid Epoxy Adhesive

RED HEAD A7+ is a high-strength, fast-cure adhesive that is designed to securely anchor threaded rod and rebar to cured concrete and masonry. A7+ is one of the most versatile anchoring solutions on the market, suitable for use in an extremely wide range of applications and environmental conditions.

- The only quick-cure ICC-ES listed for use in all wet conditions
- Qualified for use in concrete, block, brick, and clay tile. Solid or hollow base materials
- Cures in only 45 minutes (at substrate temperature of 70°F/21°C)
- ICC-ES listed for cracked concrete and seismic applications (ICC-ES ESR 3903)
- ICC-ES listed for masonry applications (ICC-ES ESR 3951)
- No drip formula that allows direct-injection overhead installation
- Low odor - suitable for use indoors and in occupied buildings
- 18-month storage life minimizes waste and risk of using expired product
- Rugged cartridge resists breakage due to rough handling or cold temperatures
- Store between 32°F and 95°F in a cool, dry place.

ADVANTAGES

- All weather formula
- Works in damp holes and underwater applications
- Fast curing time, 45 minutes at 70°F
- ICC-ES Evaluation Report ESR-3903 (Concrete) and ESR-3951 (Masonry)
- NSF 61 Listed, certified for use in conjunction with drinking water systems
- Fast & easy dispensing, even 28 ounce cartridge can be hand dispensed
- Formula for use in solid and hollow base materials

Curing Times

CONCRETE		ADHESIVE		GEL TIME	FULL CURE TIME
(F°)	(C°)	(F°)	(C°)		
110	43	110	43	1.5 minutes	45 minutes
90	32	90	32	3 minutes	45 minutes
70	21	70	21	5 minutes	45 minutes
50	10	50	10	15 minutes	90 minutes
32	0	32	0	35 minutes	4 hours
14	-10	32	0	35 minutes	24 hours

Most Competitive Spacing and Edge Distance


NOMINAL ANCHOR DIAMETER (IN.)	MINIMUM SPACING (IN.)	MINIMUM EDGE DISTANCE (IN.)
3/8	15/16	15/16
1/2	1-1/2	1-1/2
5/8	2-1/2	2-1/2
3/4	3	3
7/8	3-1/2	3-1/2
1	4	4
1-1/4	5	5

INSTALLATION STEPS


DRILL



BLOW**

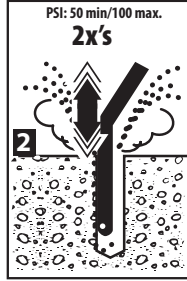


BRUSH

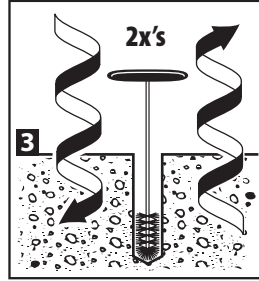


BLOW**



DISPENSE

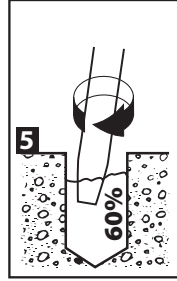

INSTALL

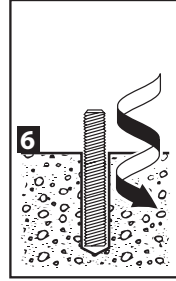

- * Damp, submerged and underwater applications require 4x's air, 4x's brushing and 4x's air
- ** Dust is shown for diagram purposes only. To help mitigate airborne dust and comply with OSHA requirements, we recommend that you either wet the concrete before blowing out the hole, or use a drill dust extractor with your pneumatic air nozzle. We recommend vacuum assisted dust extractors like Milwaukee part numbers 5261-DE or 5317-DE. Call our technical services at (800) 848-5611 for more information."

PACKAGING

1. Disposable, self-contained cartridge system capable of dispensing both components in the proper mixing ratio
2. Acrylic components dispensed through a static mixing nozzle that thoroughly mixes the material and places the material at the base of the pre-drilled hole
3. Cartridge markings: Include manufacturer's name, batch number and best-used-by date, mix ratio by volume, ANSI hazard classification, and appropriate ANSI handling precautions

All Red Head nozzles can be used with all A7+ cartridges. Choose the nozzle that is right for you depending on hole depth and dispensing needs.

TOOLS




APPROVALS/LISTINGS

ICC-ES ESR 3903 (Concrete Report)
 ICC-ES ESR 3951 (Masonry Report)
 2018, 2015, 2012, 2009, 2006 International Building Code (IBC) Compliant
 Florida Building Code (FBC)
 City of Los Angeles (COLA)
 Extensive Department of Transportation (DOT) Listings
 NSF/ANSI 61 Approval for use in Drinking Water System Components
 ASTM C881, Types I, II, IV, and V, Grade 3, Classes A, B, & C (meets Type III except elongation)

For most current approvals and listings please visit:
www.itwredhead.com

APPLICATIONS



Water Treatment Facilities


The best-in-class in edge and spacing distance of Red Head A7+ and its ability to work in water have made it a great fit for waste water treatment plants.




Roadway Doweling

A7+ dispenses so quickly and rebar inserts so easily that contractors find installed costs are lower than many other products including grout for doweling.




CARTRIDGES

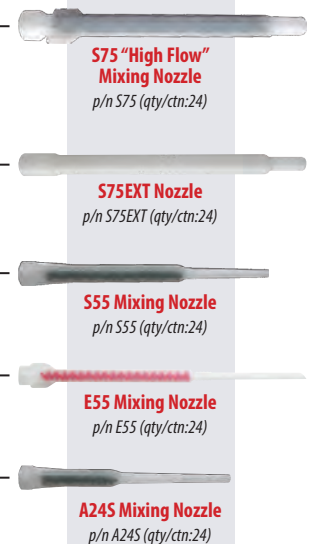

NOZZLES



A7P-10 fl. oz. Ordering Information

PART NUMBER	DESCRIPTION	BOX QTY
 A7P-10	9.5 Fluid Ounce Cartridge with A24S Nozzle	6
 A24S	Mixing Nozzle for A7P-10 Cartridge Nozzle diameter fits 3/8" to 5/8" holes (overall length of nozzle 6-3/8")	24
 A100	Hand Dispenser Designed for A7P-10 Cartridge Contractor Quality 26:1 Thrust Ratio	1

ESTIMATING TABLES

A7+

9.5 Fluid Ounce Cartridge

**Number of Anchoring Installations per Cartridge*
using Threaded Rod with A7+ in Solid Concrete**

ROD (In.)	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES									
		1	2	3	4	5	6	7	8	9	10
1/4	5/16	371.3	185.6	123.8	92.8	74.3	61.9	53.0	46.4	41.3	37.1
3/8	7/16	189.4	94.7	63.1	47.4	37.9	31.6	27.1	23.7	21.0	18.9
1/2	9/16	114.6	57.3	38.2	28.6	22.9	19.1	16.4	14.3	12.7	11.5
5/8	3/4	64.5	32.2	21.5	16.1	12.9	10.7	9.2	8.1	7.2	6.4
3/4	7/8	47.4	23.7	15.8	11.8	9.5	7.9	6.8	5.9	5.3	4.7
7/8	1	36.3	18.1	12.1	9.1	7.3	6.0	5.2	4.5	4.0	3.6
1	1-1/8	28.6	14.3	9.5	7.2	5.7	4.8	4.1	3.6	3.2	2.9
1-1/4	1-3/8	19.2	9.6	6.4	4.8	3.8	3.2	2.7	2.4	2.1	1.9
1-1/2	1-5/8	13.7	6.9	4.6	3.4	2.7	2.3	2.0	1.7	1.5	1.4

*The estimated number of anchoring installations per cartridge is based upon calculations of filling the hole 60% full of adhesive per the recommendation in our installation instructions. Hole volumes are calculated using ANSI tolerance carbide tipped drill bits. These estimates do not account for any waste.

ESTIMATING TABLE

A7+

9.5 Fluid Ounce Cartridge

**Number of Anchoring Installations per Cartridge*
using Rebar with A7+ in Solid Concrete**

REBAR	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES									
		1	2	3	4	5	6	7	8	9	10
#3	7/16	189.4	94.7	63.1	47.4	37.9	31.6	27.1	23.7	21.0	18.9
#4	5/8	92.8	46.4	30.9	23.2	18.6	15.5	13.3	11.6	10.3	9.3
#5	3/4	64.5	32.2	21.5	16.1	12.9	10.7	9.2	8.1	7.2	6.4
#6	7/8	47.4	23.7	15.8	11.8	9.5	7.9	6.8	5.9	5.3	4.7
#7	1	36.3	18.1	12.1	9.1	7.3	6.0	5.2	4.5	4.0	3.6
#8	1-1/8	28.6	14.3	9.5	7.2	5.7	4.8	4.1	3.6	3.2	2.9
#9	1-1/4	23.2	11.6	7.7	5.8	4.6	3.9	3.3	2.9	2.6	2.3
#10	1-1/2	16.1	8.1	5.4	4.0	3.2	2.7	2.3	2.0	1.8	1.6
#11	1-3/4	11.8	5.9	3.9	3.0	2.4	2.0	1.7	1.5	1.3	1.2








*The estimated number of anchoring installations per cartridge is based upon calculations of filling the hole 60% full of adhesive per the recommendation in our installation instructions. Hole volumes are calculated using ANSI tolerance carbide tipped drill bits. These estimates do not account for any waste.



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



A7P-28 fl. oz. Ordering Information

PART NUMBER	DESCRIPTION	BOX QTY	PART NUMBER	DESCRIPTION	BOX QTY
 A7P-28	28 Fluid Ounce Cartridge A7+ Each cartridge comes with a S55 Nozzle	4	 S55	Mixing Nozzle for A7P-28 Cartridge Nozzle diameter fits holes for 3/8" diameter & larger anchors (overall length of nozzle 10")	6
 E55	Mixing Nozzle for A7P-28 and G5-22 Cartridge Nozzle diameter fits 3/8" to 5/8" holes. (overall length of nozzle 14")	24	 A200	Pneumatic Dispenser for A7P-28 Cartridge	1
 A102-V3	Heavy-Duty 34:1 thrust ratio hand dispenser for A7P-28 cartridge	1	 E25-6	6-Foot Straight Tubing (Used when holes are deeper) (can cut to proper size) (.39 in I.D. x .43 in. O.D.)	24
			 A300	Cordless Battery Dispenser for A7P-28, C6P-30 and G5P-30 Cartridge. Includes one battery and charger. Works with all Milwaukee® M18™ batteries	1

*See page 65 for nozzle extension tubes and other accessories

ESTIMATING TABLE

A7+

28 Fluid Ounce Cartridge

Number of Anchoring Installations per Cartridge* using Threaded Rod with A7+ in Solid Concrete

Rod (in.)	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES														
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
1/4	5/16	1094.0	547.0	364.7	273.5	218.8	182.3	156.3	136.7	121.6	109.4	99.5	91.2	84.2	78.1	72.9
3/8	7/16	558.2	279.1	186.1	139.5	111.6	93.0	79.7	69.8	62.0	55.8	50.7	46.5	42.9	39.9	37.2
1/2	9/16	337.7	168.8	112.6	84.4	67.5	56.3	48.2	42.2	37.5	33.8	30.7	28.1	26.0	24.1	22.5
5/8	3/4	189.9	95.0	63.3	47.5	38.0	31.7	27.1	23.7	21.1	19.0	17.3	15.8	14.6	13.6	12.7
3/4	7/8	139.5	69.8	46.5	34.9	27.9	23.3	19.9	17.4	15.5	14.0	12.7	11.6	10.7	10.0	9.3
7/8	1	106.8	53.4	35.6	26.7	21.4	17.8	15.3	13.4	11.9	10.7	9.7	8.9	8.2	7.6	7.1
1	1-1/8	84.4	42.2	28.1	21.1	16.9	14.1	12.1	10.6	9.4	8.4	7.7	7.0	6.5	6.0	5.6
1-1/4	1-3/8	56.5	28.3	18.8	14.1	11.3	9.4	8.1	7.1	6.3	5.7	5.1	4.7	4.3	4.0	3.8
1-1/2	1-5/8	40.5	20.2	13.5	10.1	8.1	6.7	5.8	5.1	4.5	4.0	3.7	3.4	3.1	2.9	2.7

*The estimated number of anchoring installations per cartridge is based upon calculations of filling the hole 60% full of adhesive per the recommendation in our installation instructions. Hole volumes are calculated using ANSI tolerance carbide tipped drill bits. These estimates do not account for any waste.

ESTIMATING TABLE

A7+



28 Fluid Ounce Cartridge

Number of Anchoring Installations per Cartridge* using Rebar with A7+ in Solid Concrete

REBAR	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES														
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
#3	7/16	558.2	279.1	186.1	139.5	111.6	93.0	79.7	69.8	62.0	55.8	50.7	46.5	42.9	39.9	37.2
#4	5/8	273.5	136.7	91.2	68.4	54.7	45.6	39.1	34.2	30.4	27.3	24.9	22.8	21.0	19.5	18.2
#5	3/4	189.9	95.0	63.3	47.5	38.0	31.7	27.1	23.7	21.1	19.0	17.3	15.8	14.6	13.6	12.7
#6	7/8	139.5	69.8	46.5	34.9	27.9	23.3	19.9	17.4	15.5	14.0	12.7	11.6	10.7	10.0	9.3
#7	1	106.8	53.4	35.6	26.7	21.4	17.8	15.3	13.4	11.9	10.7	9.7	8.9	8.2	7.6	7.1
#8	1-1/8	84.4	42.2	28.1	21.1	16.9	14.1	12.1	10.6	9.4	8.4	7.7	7.0	6.5	6.0	5.6
#9	1-1/4	68.4	34.2	22.8	17.1	13.7	11.4	9.8	8.5	7.6	6.8	6.2	5.7	5.3	4.9	4.6
#10	1-1/2	47.5	23.7	15.8	11.9	9.5	7.9	6.8	5.9	5.3	4.7	4.3	4.0	3.7	3.4	3.2
#11	1-3/4	34.9	17.4	11.6	8.7	7.0	5.8	5.0	4.4	3.9	3.5	3.2	2.9	2.7	2.5	2.3

*The estimated number of anchoring installations per cartridge is based upon calculations of filling the hole 60% full of adhesive per the recommendation in our installation instructions. Hole volumes are calculated using ANSI tolerance carbide tipped drill bits. These estimates do not account for any waste.

A7P-5 fl. oz. Ordering Information

PART NUMBER	DESCRIPTION	BOX QTY	PART NUMBER	DESCRIPTION	BOX QTY
 A7P-500KIT	Kit with Dispenser Included (1) Cartridge (1) Dispenser (plastic) (1) Nozzle Nozzle diameter fits 3/8" to 5/8" holes	8	 A7P-501KIT	Kit for Standard Caulk Gun (1) Cartridge (1) Sleeve for Caulk Gun (1) Nozzle Nozzle diameter fits 3/8" to 5/8" holes	8


AVAILABLE WITH YOUR CHOICE OF TWO, EASY DISPENSING SYSTEMS

A500 PLASTIC DISPENSER


Attaches directly to cartridge allowing for easy hand dispensing. **No extra tools are required.**




Simple Assembly and Dispensing



1. Twist-lock dispenser onto cartridge.



2. Thread nozzle onto cartridge.



3. Turn lever in order to dispense adhesive.

EASY PACKAGING!

A500 and A501 kits are perfect for both counter or pegboard hanging display.



A7P-501KIT


A7P-500KIT
(not shown)

A501 CAULKINGGUN ADAPTOR


Allows cartridge to work with most standard caulking guns (caulking gun supplied by contractor)




Simple Assembly and Dispensing



1. Push adaptor tightly against back of cartridge.



2. Thread nozzle onto cartridge.



3. Place assembly in caulking gun and dispense adhesive.

ESTIMATING TABLES

A7+ 5 Fluid Ounce Cartridge

Number of Anchoring Installations per Cartridge* using Threaded Rod with A7+ in Solid Concrete

ROD (in.)	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES							
		1	2	3	4	5	6	7	8
1/4	5/16	198.9	99.5	66.3	49.7	39.8	33.2	28.4	24.9
3/8	7/16	101.5	50.7	33.8	25.4	20.3	16.9	14.5	12.7
1/2	9/16	61.4	30.7	20.5	15.3	12.3	10.2	8.8	7.7
5/8	3/4	34.5	17.3	11.5	8.6	6.9	5.8	4.9	4.3
3/4	7/8	25.4	12.7	8.5	6.3	5.1	4.2	3.6	3.2
7/8	1	19.4	9.7	6.5	4.9	3.9	3.2	2.8	2.4
1	1-1/8	15.3	7.7	5.1	3.8	3.1	2.6	2.2	1.9

*The estimated number of anchoring installations per cartridge is based upon calculations of filling the hole 60% full of adhesive per the recommendation in our installation instructions. Hole volumes are calculated using ANSI tolerance carbide tipped drill bits. These estimates do not account for any waste.



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com

ESTIMATING TABLES

A7+

5 Fluid Ounce Cartridge

Number of Anchoring Installations per Cartridge* using Rebar with A7+ in Solid Concrete

REBAR	DRILL HOLE DIA. INCHES	EMBEDMENT DEPTH IN INCHES							
		1	2	3	4	5	6	7	8
#3	7/16	101.5	50.7	33.8	25.4	20.3	16.9	14.5	12.7
#4	5/8	49.7	24.9	16.6	12.4	9.9	8.3	7.1	6.2
#5	3/4	34.5	17.3	11.5	8.6	6.9	5.8	4.9	4.3
#6	7/8	25.4	12.7	8.5	6.3	5.1	4.2	3.6	3.2
#7	1	19.4	9.7	6.5	4.9	3.9	3.2	2.8	2.4
#8	1-1/8	15.3	7.7	5.1	3.8	3.1	2.6	2.2	1.9
#9	1-1/4	12.4	6.2	4.1	3.1	2.5	2.1	1.8	1.6

*The estimated number of anchoring installations per cartridge is based upon calculations of filling the hole 60% full of adhesive per the recommendation in our installation instructions. Hole volumes are calculated using ANSI tolerance carbide tipped drill bits. These estimates do not account for any waste.

PERFORMANCE TABLE

A7+

The Most Versatile Quick-Cure

Threaded Rod Ultimate Tension and Shear Loads^{1,2,3} Installed in Solid Concrete

THREADED ROD DIAMETER in. (mm)		DRILL HOLE DIAMETER in. (mm)		MAX. CLAMPING FORCE AFTER PROPER CURE ft.-lbs. (Nm)		EMBEDMENT IN CONCRETE in. (mm)		2000 PSI (13.8 MPa) CONCRETE				4000 PSI (27.6 MPa) CONCRETE			
								ULTIMATE TENSION		ULTIMATE SHEAR		ULTIMATE TENSION		ULTIMATE SHEAR	
								lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
3/8	(9.5)	7/16	(11.1)	9	(12)	1-1/2	(38.1)	N/A	N/A	N/A	N/A	3,734	(16.6)	4,126	(18.3)
						3-3/8	(85.7)	5,852	(26.0)	5,220	(23.2)	10,977	(48.8)	5,220	(23.2)
						4-1/2	(114.3)	7,729	(34.4)	5,220	(23.2)	11,661	(51.9)	5,220	(23.2)
1/2	(12.7)	9/16	(14.3)	16	(21)	2	(50.8)	N/A	N/A	N/A	N/A	6,022	(26.8)	8,029	(35.7)
						4-1/2	(114.3)	10,798	(48.0)	8,029	(35.7)	17,162	(76.3)	8,029	(35.7)
						6	(152.4)	14,210	(63.2)	8,029	(35.7)	17,372	(77.3)	8,029	(35.7)
5/8	(15.9)	3/4	(19.1)	47	(63)	2-1/2	(63.5)	N/A	N/A	N/A	N/A	7,330	(32.6)	11,256	(50.1)
						5-5/8	(142.9)	16,417	(73.0)	15,967	(71.0)	26,504	(117.9)	15,967	(71.0)
						7-1/2	(190.5)	18,747	(83.4)	15,967	(71.0)	29,381	(130.7)	15,967	(71.0)
3/4	(19.1)	7/8	(22.2)	70	(95)	3	(76.2)	N/A	N/A	N/A	N/A	8,634	(38.4)	20,126	(89.5)
						6-3/4	(171.5)	18,618	(82.8)	20,126	(89.5)	29,727	(132.2)	20,126	(89.5)
						9	(228.6)	23,934	(106.5)	20,126	(89.5)	37,728	(167.8)	20,126	(89.5)
7/8	(22.2)	1	(25.4)	90	(122)	3-1/2	(88.9)	N/A	N/A	N/A	N/A	13,650	(60.7)	20,920	(92.9)
						7-7/8	(200.0)	N/A	N/A	29,866	(132.9)	44,915	(199.8)	29,866	(132.9)
						10-1/2	(266.7)	36,881	(164.1)	29,866	(132.9)	48,321	(215.0)	29,866	(132.9)
1	(25.4)	1-1/8	(28.6)	110	(149)	4	(101.6)	N/A	N/A	N/A	N/A	16,266	(72.2)	33,152	(147.5)
						9	(228.6)	32,215	(143.3)	37,538	(167.0)	48,209	(214.5)	37,538	(167.0)
						12	(304.8)	46,064	(204.9)	37,538	(167.0)	63,950	(284.5)	37,538	(167.0)
1-1/4	(31.8)	1-3/8	(34.9)	370	(501)	5	(127.0)	N/A	N/A	N/A	N/A	21,838	(97.1)	33,152	(147.5)
						11-1/4	(285.8)	45,962	(204.5)	58,412	(259.8)	56,715	(252.3)	58,412	(259.8)
						15	(381.0)	62,208	(276.7)	58,412	(259.8)	84,385	(375.4)	58,412	(259.8)

1 Allowable working loads for the single installation under static loading should not exceed 25% capacity of the ultimate load. To calculate the allowable load of the anchor, divide the ultimate load by 4.

2 Ultimate load values in 2000 and 4000 psi stone aggregate concrete. Ultimate loads are indicated for the embedment shown in the Embedment in Concrete column. Performance values are based on the use of high strength threaded rod (ASTM A193 Gr. B7). The use of lower strength rods will result in lower ultimate tension and shear loads.

3 Linear interpolation may be used for intermediate spacing and edge distances.

PERFORMANCE TABLE

A7+

The most Versatile Quick Cure

Threaded Rod Allowable Tension Loads^{1,2}
Installed in Solid Concrete

THREADED ROD DIAMETER in. (mm)		DRILL HOLE DIAMETER in. (mm)		MIN. EMBEDMENT DEPTH in. (mm)		ALLOWABLE TENSION LOAD BASED ON ADHESIVE BOND STRENGTH				ALLOWABLE TENSION LOAD BASED ON STEEL STRENGTH					
						2000 PSI (13.8 MPa) CONCRETE		4000 PSI (27.6 MPa) CONCRETE		ASTM A307 (SAE 1018)		ASTM A193 GR. B7 (SAE4140)		ASTM F593 AISI 304 SS	
in.	(mm)	in.	(mm)	in.	(mm)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
3/8	(9.5)	7/16	(11.1)	1-1/2	(38.1)	N/A	N/A	934	(4.2)	2,080	(9.3)	4,340	(19.3)	3,995	(17.8)
				3-3/8	(85.7)	1,460	(6.5)	2,740	(12.2)	2,080	(9.3)	4,340	(19.3)	3,995	(17.8)
				4-1/2	(114.3)	1,930	(8.6)	2,915	(13.0)	2,080	(9.3)	4,340	(19.3)	3,995	(17.8)
1/2	(12.7)	9/16	(14.3)	2	(50.8)	N/A	N/A	1,505	(6.7)	3,730	(16.6)	7,780	(34.6)	7,155	(31.8)
				4-1/2	(114.3)	2,700	(12.0)	4,290	(19.1)	3,730	(16.6)	7,780	(34.6)	7,155	(31.8)
				6	(152.4)	3,550	(15.8)	4,340	(19.3)	3,730	(16.6)	7,780	(34.6)	7,155	(31.8)
5/8	(15.9)	3/4	(19.1)	2-1/2	(63.5)	N/A	N/A	1,832	(8.2)	5,870	(26.1)	12,230	(54.4)	11,250	(50.0)
				5-5/8	(142.9)	4,100	(18.3)	6,625	(29.5)	5,870	(26.1)	12,230	(54.4)	11,250	(50.0)
				7-1/2	(190.5)	4,685	(20.8)	7,345	(32.7)	5,870	(26.1)	12,230	(54.4)	11,250	(50.0)
3/4	(19.1)	7/8	(22.2)	3	(76.2)	N/A	N/A	2,158	(9.6)	8,490	(37.8)	17,690	(78.7)	14,860	(66.1)
				6-3/4	(171.5)	4,655	(20.7)	7,430	(33.1)	8,490	(37.8)	17,690	(78.7)	14,860	(66.1)
				9	(228.6)	5,980	(26.6)	9,430	(42.0)	8,490	(37.8)	17,690	(78.7)	14,860	(66.1)
7/8	(22.2)	1	(25.4)	3-1/2	(88.9)	N/A	N/A	3,413	(15.2)	11,600	(51.6)	25,510	(113.5)	20,835	(92.7)
				7-7/8	(200.0)	N/A	N/A	11,230	(49.9)	11,600	(51.6)	25,510	(113.5)	20,835	(92.7)
				10-1/2	(266.7)	9,220	(41.0)	12,080	(53.7)	11,600	(51.6)	25,510	(113.5)	20,834	(92.7)
1	(25.4)	1-1/8	(28.6)	4	(101.6)	N/A	N/A	4,067	(18.1)	15,180	(67.5)	31,620	(140.7)	26,560	(118.1)
				9	(228.6)	8,050	(35.8)	12,050	(53.6)	15,180	(67.5)	31,620	(140.7)	26,560	(118.1)
				12	(304.8)	11,515	(51.2)	15,985	(71.1)	15,180	(67.5)	31,620	(140.7)	26,560	(118.1)
1-1/4	(31.8)	1-3/8	(34.9)	5	(127.0)	N/A	N/A	5,460	(24.3)	23,800	(105.9)	49,580	(220.6)	34,670	(154.2)
				11-1/4	(285.8)	11,490	(51.1)	14,175	(63.1)	23,800	(105.9)	49,580	(220.6)	34,670	(154.2)
				15	(381.0)	15,550	(69.2)	21,095	(93.8)	23,800	(105.9)	49,580	(220.6)	34,670	(154.2)

1 Use lower value of either bond or steel strength for allowable tensile load.

2 Larger rods and/or deeper holes may be used. However, it may not be covered by current codes.

PERFORMANCE TABLE

A7+

The most Versatile Quick Cure

Threaded Rod Allowable Shear Loads^{1,2}
Installed in Solid Concrete

THREADED ROD DIAMETER in. (mm)		DRILL HOLE DIAMETER in. (mm)		MIN. EMBEDMENT DEPTH in. (mm)		ALLOWABLE SHEAR LOAD BASED ON CONCRETE STRENGTH				ALLOWABLE SHEAR LOAD BASED ON STEEL STRENGTH					
						2000 PSI (13.8 MPa) CONCRETE		4000 PSI (27.6 MPa) CONCRETE		ASTM A307 (SAE 1018)		ASTM A193 GR. B7 (SAE4140)		ASTM F593 AISI 304 SS	
in.	(mm)	in.	(mm)	in.	(mm)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
3/8	(9.5)	7/16	(11.1)	1-1/2	(38.1)	N/A	N/A	1,031	(4.6)	1,040	(4.6)	2,170	(9.7)	1,995	(8.9)
				3-3/8	(85.7)	1,305	(5.8)	1,305	(5.8)	1,040	(4.6)	2,170	(9.7)	1,995	(8.9)
1/2	(12.7)	9/16	(14.3)	2	(50.8)	N/A	N/A	2,005	(8.9)	1,870	(8.3)	3,895	(17.3)	3,585	(15.9)
				4-1/2	(114.3)	2,005	(8.9)	2,005	(8.9)	1,870	(8.3)	3,895	(17.3)	3,585	(15.9)
5/8	(15.9)	3/4	(19.1)	2-1/2	(63.5)	N/A	N/A	2,814	(12.5)	2,940	(13.1)	6,125	(27.2)	5,635	(25.1)
				5-5/8	(142.9)	3,990	(17.8)	3,990	(17.8)	2,940	(13.1)	6,125	(27.2)	5,635	(25.1)
3/4	(19.1)	7/8	(22.2)	3	(76.2)	N/A	N/A	5,030	(22.4)	4,250	(18.9)	8,855	(39.4)	7,440	(33.1)
				6-3/4	(171.5)	5,030	(22.4)	5,030	(22.4)	4,250	(18.9)	8,855	(39.4)	7,440	(33.1)
7/8	(22.2)	1	(25.4)	3-1/2	(88.9)	N/A	N/A	5,230	(23.3)	5,800	(25.8)	12,760	(56.8)	10,730	(47.7)
				7-7/8	(200.0)	7,465	(33.2)	7,465	(33.2)	5,800	(25.8)	12,760	(56.8)	10,730	(47.7)
1	(25.4)	1-1/8	(28.6)	4	(101.6)	N/A	N/A	8,288	(36.9)	7,590	(33.8)	15,810	(70.3)	13,285	(59.1)
				9	(228.6)	9,385	(41.7)	9,385	(41.7)	7,590	(33.8)	15,810	(70.3)	13,285	(59.1)
1-1/4	(31.8)	1-3/8	(34.9)	5	(127.0)	N/A	N/A	8,288	(36.9)	11,900	(52.9)	24,790	(100.3)	18,840	(83.8)
				11-1/4	(285.8)	14,600	(64.9)	14,600	(64.9)	11,900	(52.9)	24,790	(100.3)	18,840	(83.8)

1 Use lower value of either concrete or steel strength for allowable shear load.

2 Larger rods and/or deeper holes may be used. However, it may not be covered by current codes.



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



RED HEAD®

PERFORMANCE TABLE

A7+

The Most Versatile Quick-Cure

Rebar Ultimate Tension Loads^{1,2,3}
Installed in Solid Concrete

REINFORCING BAR DIAMETER in. (mm)		EMBEDMENT IN CONCRETE in. (mm)		2000 PSI (13.8 MPa) CONCRETE ULTIMATE TENSION lbs. (kN)		4000 PSI (27.6 MPa) CONCRETE ULTIMATE TENSION lbs. (kN)		ULTIMATE TENSILE AND YIELD STRENGTH: GRADE 60 REBAR			
								MINIMUM YIELD STRENGTH		MINIMUM ULTIMATE TENSILE STRENGTH	
# 3	(9.5)	3-3/8	(85.7)	6,180	(27.5)	8,324	(37.0)	6,600	(29.4)	9,900	(44.0)
		4-1/2	(114.3)	7,560	(33.6)	11,418	(50.8)	6,600	(29.4)	9,900	(44.0)
# 4	(12.7)	4-1/2	(114.3)	9,949	(44.3)	16,657	(74.1)	12,000	(53.4)	18,000	(80.1)
		6	(152.4)	15,038	(66.9)	17,828	(79.3)	12,000	(53.4)	18,000	(80.1)
# 5	(15.9)	5-5/8	(142.9)	14,012	(62.3)	20,896	(93.0)	18,600	(82.7)	27,900	(124.1)
		7-1/2	(190.5)	16,718	(74.4)	26,072	(116.0)	18,600	(82.7)	27,900	(124.1)
# 6	(19.1)	6-3/4	(171.5)	21,247	(94.5)	26,691	(118.7)	26,400	(117.4)	39,600	(176.2)
		9	(228.6)	33,325	(148.2)	37,425	(166.5)	26,400	(117.4)	39,600	(176.2)
# 7	(22.2)	7-7/8	(200.0)	N/A	N/A	40,374	(179.6)	36,000	(160.1)	54,000	(240.2)
		10-1/2	(266.7)	38,975	(173.4)	46,050	(204.8)	36,000	(160.1)	54,000	(240.2)
# 8	(25.4)	9	(228.6)	35,600	(158.4)	47,311	(210.5)	47,400	(210.9)	71,100	(316.3)
		12	(304.8)	41,010	(182.4)	66,140	(294.2)	47,400	(210.9)	71,100	(316.3)
# 9	(28.6)	10-1/8	(257.2)	N/A	N/A	57,221	(254.5)	60,000	(266.9)	90,000	(400.4)
		13-1/2	(342.9)	N/A	N/A	79,966	(355.7)	60,000	(266.9)	90,000	(400.4)
# 10	(31.8)	11-1/4	(285.8)	49,045	(218.2)	73,091	(325.1)	76,200	(339.0)	114,300	(508.5)
		15	(381.0)	69,079	(307.3)	83,295	(370.5)	76,200	(339.0)	114,300	(508.5)
# 11	(34.9)	12-3/8	(314.3)	63,397	(282.0)	75,047	(333.8)	93,600	(416.4)	140,400	(624.6)
		16-1/2	(419.1)	81,707	(363.5)	91,989	(409.2)	93,600	(416.4)	140,400	(624.6)

1 Allowable working loads for the single installation under static loading should not exceed 25% capacity or the allowable load of the anchor rod.

2 Ultimate load values in 2000 and 4000 psi stone aggregate concrete. Ultimate loads are indicated for the embedment shown in the Embedment in Concrete column. Performance values are based on the use of minimum Grade 60 reinforcing bar. The use of lower strength rods will result in lower ultimate tension loads.

3 SHEAR DATA: Provided the distance from the rebar to the edge of the concrete member exceeds 1.25 times the embedment depth of the rebar, calculate the ultimate shear load for the rebar anchorage as 60% of the ultimate tensile strength of the rebar.

4 Larger rods and/or deeper holes may be used. However, it may not be covered by current codes.

PERFORMANCE TABLE

A7+

The Most Versatile Quick-Cure

Threaded Rod Recommended Edge Distance Requirements
for Tension Loads Installed in Solid Concrete

ANCHOR DIAMETER in. (mm)		EMBEDMENT DEPTH in. (mm)		CRITICAL EDGE DISTANCE (100% LOAD CAPACITY) in. (mm)		INTERPOLATED EDGE DISTANCE (90% LOAD CAPACITY) in. (mm)		INTERPOLATED EDGE DISTANCE (80% LOAD CAPACITY) in. (mm)		MINIMUM EDGE DISTANCE (70% LOAD CAPACITY) in. (mm)	
3/8	(9.5)	3-3/8	(85.7)	2-1/2	(63.5)	1-15/16	(49.2)	1-3/8	(34.9)	13/16	(26.2)
		4-1/2	(114.3)	3-3/8	(85.7)	2-5/8	(66.7)	1-7/8	(47.6)	1-1/8	(28.6)
1/2	(12.7)	4-1/2	(114.3)	3-3/8	(85.7)	2-5/8	(66.7)	1-7/8	(47.6)	1-1/8	(28.6)
		6	(152.4)	4-1/2	(114.3)	3-1/2	(88.9)	2-1/2	(63.5)	1-1/2	(38.1)
5/8	(15.9)	5-5/8	(142.9)	4-3/16	(106.4)	3-1/4	(82.6)	2-5/16	(58.7)	1-3/8	(34.9)
		7-1/2	(190.5)	5-5/8	(142.9)	4-3/8	(111.1)	3-1/8	(79.4)	1-7/8	(47.6)
3/4	(19.1)	6-3/4	(171.5)	5-1/16	(128.6)	3-15/16	(100.0)	2-13/16	(71.4)	1-5/8	(15.9)
		9	(228.6)	6-3/4	(171.5)	5-1/4	(133.4)	3-3/4	(95.3)	2-1/4	(57.2)
1	(25.4)	9	(228.6)	6-3/4	(171.5)	5-1/4	(133.4)	3-3/4	(95.3)	2-1/4	(57.2)
		12	(304.8)	9	(228.6)	7	(177.8)	5	(127.0)	3	(76.2)
1-1/4	(31.8)	11-1/4	(285.8)	8-7/16	(214.3)	6-9/16	(166.7)	4-3/4	(120.7)	2-7/8	(73.0)
		15	(381.0)	11-1/4	(285.8)	8-3/4	(222.2)	6-1/4	(158.8)	3-3/4	(95.3)

PERFORMANCE TABLE

A7+

The Most Versatile Quick-Cure

Threaded Rod Recommended Edge Distance Requirements for Shear Loads Installed in Solid Concrete

ANCHOR DIAMETER		EMBEDMENT DEPTH (100% LOAD CAPACITY)		CRITICAL EDGE DISTANCE (80% LOAD CAPACITY)		INTERPOLATED EDGE DISTANCE (50% LOAD CAPACITY)		INTERPOLATED EDGE DISTANCE (10% LOAD CAPACITY)		MINIMUM EDGE DISTANCE	
in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)
3/8	(9.5)	3-3/8	(85.7)	4-3/16	(106.4)	3-7/16	(87.3)	2-5/16	(58.7)	13/16	(20.6)
1/2	(12.7)	4-1/2	(114.3)	5-5/8	(142.9)	4-5/8	(117.5)	3-1/8	(79.4)	1-1/8	(28.6)
5/8	(15.9)	5-5/8	(142.9)	7	(177.8)	5-3/4	(146.1)	3-1/8	(79.4)	1-3/8	(34.9)
3/4	(19.1)	6-3/4	(171.5)	8-7/16	(214.2)	6-15/16	(176.2)	4-5/8	(117.5)	1-5/8	(41.3)
1	(25.4)	9	(228.6)	11-1/4	(285.8)	9-1/4	(235.0)	6-1/4	(158.8)	2-1/4	(57.2)
1-1/4	(31.8)	11-1/4	(285.8)	14-1/16	(357.2)	11-5/8	(295.3)	7-7/8	(200.0)	2-7/8	(73.0)

PERFORMANCE REFERENCE TABLE

A7+

The Most Versatile Quick-Cure

Allowable Stress Design Reference Tables

Threaded Rod and Rebar Installation in Solid Concrete Edge / Spacing Distance Load Factor Summary^{1,2}

LOAD FACTOR

Critical Edge Distance—Tension

100% Tension Load

Minimum Edge Distance—Tension

70% Tension Load

Critical Edge Distance—Shear

100% Shear Load

Minimum Edge Distance—Shear

10% Shear Load

DISTANCE FROM EDGE OF CONCRETE

0.75 x Anchor Embedment

0.25 x Anchor Embedment

1.25 x Anchor Embedment

0.25 x Anchor Embedment

LOAD FACTOR

Critical Spacing—Tension

100% Tension Load

Minimum Spacing—Tension

80% Tension Load

Critical Spacing—Shear

100% Shear Load

Minimum Spacing—Shear

25% Shear Load

DISTANCE FROM ANOTHER ANCHOR

1.25 x Anchor Embedment

0.25 x Anchor Embedment

1.25 x Anchor Embedment

0.25 x Anchor Embedment

1 Use linear interpolation for load factors at edge distances or spacing distances between critical and minimum.

2 Anchors are affected by multiple combination of spacing and/or edge distance loading and direction of the loading. Use the product of tension and shear loading factors in design.

Combined Tension and Shear Loading—for A7+/C6+/G5+ Adhesive Anchors

Allowable loads for anchors under tension and shear loading at the same time (combined loading) will be lower than the allowable loads for anchors subjected to 100% tension or 100% shear. Use the following equation to evaluate anchors in combined loading conditions:

$$\left(\frac{N_a}{N_s} \right)^{5/3} + \left(\frac{V_a}{V_s} \right)^{5/3} \leq 1$$

N_a = Applied Service Tension Load

N_s = Allowable Tension Load

V_a = Applied Service Shear Load

V_s = Allowable Shear Load



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



STRENGTH DESIGN TABLE

A7+

The Most Versatile Quick-Cure

**Threaded Rod Tension (lbf) and Shear (lbf) Loads
in Uncracked Concrete^{1,2,3,4} ASTM A193 B7**

Anchor Diameter (in.)	Embedment Depth (in.)	Tension (lbf)					Shear (lbf)
		2500 psi	3000 psi	4000 psi	5000 psi	6000 psi - 8000 psi	2500 psi - 8000 psi
3/8	3-3/8	3,870	3,870	3,870	3,870	3,870	3,775
	4-1/2	5,160	5,160	5,160	5,160	5,160	3,775
	7-1/2	7,265	7,265	7,265	7,265	7,265	3,775
1/2	4-1/2	6,880	6,880	6,880	6,880	6,880	6,915
	6	9,175	9,175	9,175	9,175	9,175	6,915
	10	13,305	13,305	13,305	13,305	13,305	6,915
5/8	5-5/8	10,405	10,750	10,750	10,750	10,750	11,015
	7-1/2	14,335	14,335	14,335	14,335	14,335	11,015
	12-1/2	21,185	21,185	21,185	21,185	21,185	11,015
3/4	6-3/4	13,675	14,980	15,480	15,480	15,480	16,305
	9	20,640	20,640	20,640	20,640	20,640	16,305
	15	31,355	31,355	31,355	31,355	31,355	16,305
7/8	7-7/8	17,235	17,740	17,740	17,740	17,740	22,505
	10-1/2	23,650	23,650	23,650	23,650	23,650	22,505
	17-1/2	39,420	39,420	39,420	39,420	39,420	22,505
1	9	21,060	23,070	23,170	23,170	23,170	29,525
	12	30,890	30,890	30,890	30,890	30,890	29,525
	20	51,490	51,490	51,490	51,490	51,490	29,525
1-1/4	11-1/4	29,430	32,240	37,225	41,620	42,785	47,240
	15	45,310	49,635	57,045	57,045	57,045	47,240
	25	90,855	90,855	90,855	90,855	90,855	47,240

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths used in calculations are for dry, uncracked concrete with periodic inspection

4 Bond strengths used in calculations are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).

STRENGTH DESIGN TABLE

A7+

The Most Versatile Quick-Cure

**Threaded Rod Tension (lbf) and Shear (lbf) Loads
in 4,000 psi Uncracked Concrete^{1,2,3,4}**

Anchor Diameter (in.)	Embedment Depth (in.)	ASTM A193 B7 Threaded Rod		Stainless Steel F593		Carbon Steel A36	
		Tension (lbf)	Shear (lbf)	Tension (lbf)	Shear (lbf)	Tension (lbf)	Shear (lbf)
3/8	3-3/8	3,870	3,775	3,375	1,755	3,870	2,280
	4-1/2	5,160	3,775	3,375	1,755	4,785	2,280
	7-1/2	7,265	3,775	3,375	1,755	4,785	2,280
1/2	4-1/2	6,880	6,915	6,170	3,210	6,880	4,040
	6	9,175	6,915	6,170	3,210	8,760	4,040
	10	13,305	6,915	6,170	3,210	8,760	4,040
5/8	5-5/8	10,750	11,015	9,830	5,115	10,750	6,440
	7-1/2	14,335	11,015	9,830	5,115	13,955	6,440
	12-1/2	21,185	11,015	9,830	5,115	13,955	6,440
3/4	6-3/4	15,480	16,305	14,550	7,565	15,480	7,610
	9	20,640	16,305	14,550	7,565	16,500	7,610
	15	31,355	16,305	14,550	7,565	16,500	7,610
7/8	7-7/8	17,740	22,505	17,740	10,445	17,740	10,530
	10-1/2	23,650	22,505	20,085	10,445	22,820	10,530
	17-1/2	39,420	22,505	20,085	10,445	22,820	10,530
1	9	23,170	29,525	23,170	13,700	23,170	13,815
	12	30,890	29,525	26,345	13,700	29,935	13,815
	20	51,490	29,525	26,345	13,700	29,935	13,815
1-1/4	11-1/4	37,225	47,240	37,225	21,920	37,225	22,090
	15	57,045	47,240	42,155	21,920	47,865	22,090
	25	90,855	47,240	42,155	21,920	47,865	22,090

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths used in calculations are for dry, uncracked concrete with periodic inspection

4 Bond strengths used in calculations are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



STRENGTH DESIGN TABLE

A7+

The Most Versatile Quick-Cure

**Threaded Rod Tension (lbf) and Shear (lbf) Loads
in Cracked Concrete^{1,2,3,4} ASTM A193 B7**

Anchor Diameter (in.)	Embedment Depth (in.)	Tension (lbf) 2,500-8,000 psi	Shear (lbf) 2,500-8,000 psi
3/8	3-3/8	2,315	3,775
	4-1/2	3,090	3,775
	7-1/2	5,150	3,775
1/2	4-1/2	3,070	6,915
	6	4,095	6,915
	10	6,825	6,915
5/8	5-5/8	5,220	11,015
	7-1/2	6,965	11,015
	12-1/2	11,605	11,015
3/4	6-3/4	7,785	15,365
	9	10,380	16,305
	15	17,300	16,305
7/8	7-7/8	8,270	20,915
	10-1/2	11,030	22,505
	17-1/2	18,385	22,505
1	9	10,185	27,320
	12	13,580	29,525
	20	22,635	29,525
1-1/4	11-1/4	16,795	46,600
	15	22,395	47,240
	25	37,330	47,240

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths used in calculations are for dry, cracked concrete with periodic inspection

4 Bond strengths used in calculations are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).

STRENGTH DESIGN TABLE

A7+

The Most Versatile Quick-Cure

**Threaded Rod Tension (lbf) and Shear (lbf) Loads
in 4,000 psi Cracked Concrete^{1,2,3,4}**

Anchor Diameter (in.)	Embedment Depth (in.)	ASTM A193 B7 Threaded Rod		Stainless Steel F593		Carbon Steel A36	
		Tension (lbf)	Shear (lbf)	Tension (lbf)	Shear (lbf)	Tension (lbf)	Shear (lbf)
3/8	3-3/8	2,315	3,245	3,375	1,755	3,870	2,280
	4-1/2	3,090	3,775	3,375	1,755	4,785	2,280
	7-1/2	5,150	3,775	3,375	1,755	4,785	2,280
1/2	4-1/2	3,070	4,295	6,170	3,210	6,670	4,040
	6	4,095	5,730	6,170	3,210	8,760	4,040
	10	6,825	6,915	6,170	3,210	8,760	4,040
5/8	5-5/8	5,220	7,310	9,320	5,115	9,320	6,440
	7-1/2	6,965	9,750	9,830	5,115	13,955	6,440
	12-1/2	11,605	11,015	9,830	5,115	13,955	6,440
3/4	6-3/4	7,785	10,895	12,255	7,565	12,255	7,610
	9	10,380	14,530	14,550	7,565	16,500	7,610
	15	17,300	16,305	14,550	7,565	16,500	7,610
7/8	7-7/8	8,270	11,580	15,440	10,445	15,440	10,530
	10-1/2	11,030	15,445	20,085	10,445	22,820	10,530
	17-1/2	18,385	22,505	20,085	10,445	22,820	10,530
1	9	10,185	14,260	18,865	13,700	18,865	13,815
	12	13,580	19,010	26,345	13,700	29,050	13,815
	20	22,635	29,525	26,345	13,700	29,935	13,815
1-1/4	11-1/4	16,795	23,515	26,370	21,920	26,370	22,090
	15	22,395	31,355	40,600	21,920	40,600	22,090
	25	37,330	47,240	42,155	21,920	47,865	22,090

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths used in calculations are for dry, cracked concrete with periodic inspection

4 Bond strengths used in calculations are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).

STRENGTH DESIGN TABLE

A7+

The Most Versatile Quick-Cure

Rebar Tension (lbf) and Shear (lbf) Loads
in Uncracked Concrete^{1,2,3,4} ASTM A615 Grade 60

Rebar	Anchor Diameter (in.)	Embedment Depth (in.)	Tension (lbf)					Shear (lbf)
			2500 psi	3000 psi	4000 psi	5000 psi	6000 - 8000 psi	2500 - 8000 psi
#3	3/8	3-3/8	3,660	3,660	3,660	3,660	3,660	3,560
		4-1/2	4,880	4,880	4,880	4,880	4,880	3,560
		7-1/2	4,835	6,435	6,435	6,435	6,435	3,560
#4	1/2	4-1/2	7,445	7,520	7,520	7,520	7,520	6,480
		6	10,030	10,030	10,030	10,030	10,030	6,480
		10	11,700	11,700	11,700	11,700	11,700	6,480
#5	5/8	5-5/8	10,405	11,395	11,540	11,540	11,540	10,040
		7-1/2	15,385	15,385	15,385	15,385	15,385	10,040
		12-1/2	18,135	18,135	18,135	18,135	18,135	10,040
#6	3/4	6-3/4	13,675	14,870	14,870	14,870	14,870	14,255
		9	19,825	19,825	19,825	19,825	19,825	14,255
		15	25,740	25,740	25,740	25,740	25,740	14,255
#7	7/8	7-7/8	17,235	18,880	19,465	19,465	19,465	19,440
		10-1/2	25,955	25,955	25,955	25,955	25,955	19,440
		17-1/2	35,100	35,100	35,100	35,100	35,100	19,440
#8	1	9	21,060	23,070	25,110	25,110	25,110	25,595
		12	32,420	33,485	33,485	33,485	33,485	25,595
		20	46,215	46,215	46,215	46,215	46,215	25,595
#9	1-1/8	10-1/8	25,130	27,525	31,195	31,195	31,195	32,400
		13-1/2	38,690	41,590	41,590	41,590	41,590	32,400
		22-1/2	58,500	58,500	58,500	58,500	58,500	32,400
#10	1-1/4	11-1/4	29,430	32,240	37,225	41,620	44,505	41,145
		15	45,310	49,635	57,315	59,345	59,345	41,145
		25	74,295	74,295	74,295	74,295	74,295	41,145

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths used in calculations are for dry, uncracked concrete with periodic inspection

4 Bond strengths used in calculations are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).

STRENGTH DESIGN TABLE

A7+

The Most Versatile Quick-Cure

Rebar Tension (lbf) and Shear (lbf) Loads
in Cracked Concrete^{1,2,3,4} ASTM A615 Grade 60

Rebar	Anchor Diameter (in.)	Embedment Depth (in.)	Tension (lbf) 2500 - 8000 psi concrete	Shear (lbf) 2500 - 8000 psi concrete
#3	3/8	3-3/8	1,650	2,310
		4-1/2	2,200	3,080
		7-1/2	3,665	3,560
#4	1/2	4-1/2	2,935	4,105
		6	3,910	5,475
		10	6,520	6,480
#5	5/8	5-5/8	4,585	6,420
		7-1/2	6,115	8,560
		12-1/2	10,190	10,040
#6	3/4	6-3/4	5,115	7,160
		9	6,820	9,550
		15	11,370	14,255
#7	7/8	7-7/8	6,965	9,750
		10-1/2	9,285	13,000
		17-1/2	15,475	19,440
#8	1	9	9,095	12,735
		12	12,125	16,980
		20	20,215	25,595
#9	1-1/8	10-1/8	11,510	16,115
		13-1/2	15,350	21,490
		22-1/2	25,585	32,400
#10	1-1/4	11-1/4	16,795	23,515
		15	22,395	31,355
		25	37,330	41,145

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths used in calculations are for dry, cracked concrete with periodic inspection

4 Bond strengths used in calculations are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).

MASONRY DESIGN TABLE

A7+

The Most Versatile Quick-Cure

Grout-filled Concrete Block: Threaded Rod Allowable Tension and Shear Load Based on Steel Design Information for U.S. Customary Unit^{1,2,3}

Anchor Diameter (in.)	Tension (lb)			Shear (lb)		
	ASTM A307 F _u = 60 ksi	ASTM A193 Grade B7 F _u = 125 ksi	ASTM F593 SS 304 F _u = 100 ksi	ASTM A307 F _u = 60 ksi	ASTM A193 Grade B7 F _u = 125 ksi	ASTM F593 SS 304 F _u = 100 ksi
3/8	2,185	4,555	3,645	1,125	2,345	1,875
1/2	3,885	8,100	6,480	2,000	4,170	3,335
5/8	6,075	12,655	10,125	3,130	6,520	5,215
3/4	8,750	18,225	12,390	4,505	9,390	6,385

For SI: 1 inch = 25.4mm, 1 lbf = 4.45N, 1ft-lbf = 1.356 N-M, 1 psi = 0.006895 MPa

- Allowable load used in the design must be the lesser of bond values and tabulated steel element values.
- Allowable tension and shear loads for threaded rods to resist short term loads, such as wind or seismic, must be calculated in accordance with Section 4.1 of ICC ESR 3951 as applicable.
- Allowable steel loads are based on allowable tension and shear stresses equal to 0.33X F_u and 0.17X F_u, respectively.

MASONRY DESIGN TABLE

A7+

The Most Versatile Quick-Cure

Grout-filled Concrete Block: Threaded Rod Allowable Tension Loads with Reduction Factors^{1,2,3,4,7,9,10,12}

Anchor Diameter (in.)	Minimum Embedment (inches)	Load at s _{cr} and c _{cr} (lb)	Spacing ⁵			Edge Distance ⁶		
			Critical s _{cr} (inches)	Minimum s _{min} (inches)	Load reduction factor for s _{min} ⁸	Critical c _{cr} (inches)	Minimum c _{min} (inches)	Load reduction factor for c _{min} ⁸
3/8	3-3/8	1,125	13.5	4	1.00	12	4	1.00
1/2	4-1/2	1,695	18	4	0.60	20	4	0.90
5/8	5-5/8	2,015	22.5	4	0.60	20	4	0.90
3/4	6-3/4	3,145	27	4	0.60	20	4	0.63

MASONRY DESIGN TABLE

A7+

The Most Versatile Quick-Cure

Grout-filled Concrete Block: Threaded Rod Allowable Shear Loads with Reduction Factors^{1,2,3,4,7,9,10,12}

Anchor Diameter (in.)	Minimum Embedment (in.)	Load at s _{cr} and c _{cr} (lb.)	Spacing ⁵			Edge Distance ⁶		
			Critical s _{cr} (in.)	Minimum s _{min} (in.)	Load reduction factor for s _{min} ⁸	Critical c _{cr} (in.)	Minimum c _{min} (in.)	Load reduction factor for c _{min} ⁸
3/8	3-3/8	750	13.5	4	0.50	12	4	0.95
1/2	4-1/2	1,520	18	4	0.50	20	4	0.44
5/8	5-5/8	2,285	22.5	4	0.50	12	4	0.26
3/4	6-3/4	2,345	27	4	0.50	20	4	0.26

For SI: 1 inch = 25.4mm, 1 lbf = 0.0044 kN, 1 ksi = 6.894 MPa. (Refer to Table 4 for footnotes)

- All values are for anchors installed in fully grouted concrete masonry with minimum masonry strength of 1500 psi (10.3 MPa). Concrete masonry units must be light-, medium, or normal-weight conforming to ASTM C 90. Allowable loads have been calculated using a safety factor of 5.0.
- Anchors may be installed in any location in the face of the masonry wall (cell, web, bed joint).
- A maximum of two anchors may be installed in a single masonry cell in accordance with the spacing and edge or end distance requirements. Embedment is measured from the outside surface of the concrete masonry unit to the embedded end of the anchor. See Figure 2 of ICC ESR 3951.
- The critical spacing distance, s_{cr}, is the anchor spacing where full load values in the table may be used. The minimum spacing distance, s_{min}, is the minimum anchor spacing for which values are available and installation is permitted. Spacing distance is measured from the centerline to centerline between two anchors.
- The critical edge or end distance, c_{cr}, is the distance where full load values in the table may be used. The minimum edge or end distance, c_{min}, is the minimum distance for which values are available and installation is permitted. Edge or end distance is measured from anchor centerline to the closest unrestrained edge.
- The tabulated values are applicable for anchors in the ends of grout-filled concrete masonry units where minimum edge distances are maintained.
- Load values for anchors installed less than s_{cr} and c_{cr} must be multiplied by the appropriate load reduction factor based on actual spacing (s) or edge distance (c). Load factors are multiplicative; both spacing and edge reduction factors must be considered.
- Linear interpolation of load values between minimum spacing (s_{min}) and critical spacing (s_{cr}) and between minimum edge or end distance (c_{min}) and critical edge or end distance (c_{cr}) is permitted.
- Concrete masonry width (wall thickness) must be equal to or greater than 1.5 times the anchor embedment depth (e.g. 3/8-inch- and 1/2-inch-diameter anchors are permitted in minimum nominally 6-inch-thick concrete masonry). The 5/8- and 3/4-inch-diameter anchors must be installed in minimum nominally 8-inch-thick concrete masonry.
- Allowable loads must be the lesser of the adjusted masonry or bond values tabulated above and the steel strength values given in Table 2 of ECC ESR 3951.
- Tabulated allowable bond loads must be adjusted for increased in-service base material temperatures in accordance with Figure 1 of ECC ESR 3951.



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



MASONRY DESIGN TABLE

A7+

The Most Versatile Quick-Cure

Grout-filled Concrete Block: Rebar Allowable Tension and Shear Loads^{1, 2, 3}

Rebar Size	Tension (lb) ASTM A615, Grade 60	Shear (lb) ASTM A615, Grade 60
No. 3	3,270	1,685
No. 4	5,940	3,060
No. 5	9,205	4,745
No. 6	13,070	6,730

For SI: 1 inch = 25.4mm, 1 lbf = 4.45N, 1ft-lbf = 1.356 N-M, 1 psi = 0.006895 MPa

1 Allowable load used in the design must be the lesser of bond values and tabulated steel element values.

2 Allowable tension and shear loads for threaded rods to resist short term loads, such as wind or seismic, must be calculated in accordance with Section 4.1 of ICC ESR 3951 as applicable.

3 Allowable steel loads are based on allowable tension and shear stresses equal to 0.33X Fu and 0.17X Fu, respectively.

MASONRY DESIGN TABLE

A7+

The Most Versatile Quick-Cure

Grout-filled Concrete Block: Rebar Allowable Tension Loads with Reduction Factors^{1, 2, 3, 4, 7, 9, 10, 12}

Anchor Diameter (in.)	Minimum Embedment (inches)	Load at s_{cr} and c_{cr} (lb.)	Spacing ⁵			Edge Distance ⁶		
			Critical s_{cr} (in.)	Minimum s_{min} (in.)	Load reduction factor for s_{min} ⁸	Critical c_{cr} (in.)	Minimum c_{min} (in.)	Load reduction factor for c_{min} ⁸
3/8	3-3/8	1,530	13.5	4	1.00	12	4	1.00
1/2	4-1/2	1,845	18	4	0.60	20	4	0.90
5/8	5-5/8	2,465	22.5	4	0.60	20	4	0.90
3/4	6-3/4	2,380	27	4	0.60	20	4	0.63

MASONRY DESIGN TABLE

A7+

The Most Versatile Quick-Cure

Grout-filled Concrete Block: Rebar Allowable Shear Loads with Reduction Factors^{1, 2, 3, 4, 7, 9, 10, 12}

Anchor Diameter (in.)	Minimum Embedment (in.)	Load at s_{cr} and c_{cr} \perp to edge (lb.)	Spacing ⁵			Edge Distance ⁶		
			Critical s_{cr} (in.)	Minimum s_{min} (in.)	Load reduction factor for s_{min} ⁸	Critical c_{cr} (in.)	Minimum c_{min} (in.)	Load reduction factor for c_{min} ⁸
3/8	3-3/8	1,410	13.5	4	0.50	12	4	0.95
1/2	4-1/2	1,680	18	4	0.50	20	4	0.44
5/8	5-5/8	3,245	22.5	4	0.50	12	4	0.26
3/4	6-3/4	4,000	27	4	0.50	20	4	0.26

For SI: 1 inch = 25.4 mm; 1 lbf = 0.0044 kN, 1 ksi = 6.894 MPa.

(The following footnotes apply to both Tables 6 and 7)

- All values are for anchors installed in fully grouted concrete masonry with minimum masonry strength of 1500 psi (10.3 MPa). Concrete masonry units must be light-, medium-, or normal-weight conforming to ASTM C 90. Allowable loads have been calculated using a safety factor of 5.0.
- Anchors may be installed in any location in the face of the masonry wall (cell, web, bed joint).
- A maximum of two anchors may be installed in a single masonry cell in accordance with the spacing and edge or end distance requirements. Embedment is measured from the outside surface of the concrete masonry unit to the embedded end of the anchor. See Figure 2 of ICC ESR 3951.
- The critical spacing distance, s_{cr} , is the anchor spacing where full load values in the table may be used. The minimum spacing distance, s_{min} , is the minimum anchor spacing for which values are available and installation is permitted. Spacing distance is measured from the centerline to centerline between two anchors.
- The critical edge or end distance, c_{cr} , is the distance where full load values in the table may be used. The minimum edge or end distance, c_{min} , is the minimum distance for which values are available and installation is permitted. Edge or end distance is measured from anchor centerline to the closest unrestrained edge.
- The tabulated values are applicable for anchors in the ends of grout-filled concrete masonry units where minimum edge distances are maintained.
- Load values for anchors installed less than s_{cr} and c_{cr} must be multiplied by the appropriate load reduction factor based on actual spacing (s) or edge distance (c). Load factors are multiplicative; both spacing and edge reduction factors must be considered.
- Linear interpolation of load values between minimum spacing (s_{min}) and critical spacing (s_{cr}) and between minimum edge or end distance (c_{min}) and critical edge or end distance (c_{cr}) is permitted.
- Concrete masonry width (wall thickness) must be equal to or greater than 1.5 times the anchor embedment depth (e.g. No. 3 and No. 4 reinforcing bars are permitted in minimum nominally 6-inch-thick concrete masonry). No. 5 and No. 6 reinforcing bars must be installed in minimum nominally 8-inch-thick concrete masonry.
- Allowable loads must be the lesser of the adjusted masonry or bond values tabulated above and the steel strength values given in Table 2 of ICC ESR 3951.
- Tabulated allowable bond loads must be adjusted for increased in-service base material temperatures in accordance with Figure 1 of ICC ESR 3951 as applicable.

C6+

For the Most Demanding Jobs



C6P-15

C6P-30



DESCRIPTION

Maximum strength epoxy for your most heavy-duty and specialty applications

Red Head C6+ is the highest strength adhesive in our history. Designed for use in the most demanding anchoring applications, the maximum strength of Red Head C6+ is backed by ICC-ES (AC308, AC58) approvals for both concrete and masonry. It is also the only adhesive approved for core-drilled holes in cracked concrete without the use of a roughening tool.

- At least 25% stronger than the old Epcon C6+ formulation for threaded rod in cracked concrete with seismic conditions
- Fastest Cure time in its class, curing in just 2.75 hours at 90°F and in only 2 hours at 110°F!
- ICC-ES listing for cracked concrete and seismic applications (ICC-ES ESR 4046)
- ICC-ES listing for masonry applications (ICC-ES ESR 4109)
- ICC-ES listing for use in core-drill holes, even in cracked concrete
- ICC-ES listing for all wet conditions (including underwater)
- Rebar fire performance report in accordance with EAD (European Assessment Document)
- At least 10 minutes of nozzle life (Even at 110°F!)
- Can be used down to 40°F and up to 110°F
- Can be used in oversized and core drilled holes
- Buy American Compliant. Made in USA with U.S. and Global Materials
- Rugged cartridges resist breakage due to rough handling or cold temperatures
- 24-month shelf life
- Store between 50°F and 95°F in a cool, dry place.

ADVANTAGES

- The industry's first adhesive to be approved for use in core-drilled holes in cracked concrete without the need for a roughening tool
- Install Red Head C6+ and apply the load in the same work shift! (in 70°F and above)
- Can be used in wet/damp/underwater applications
- More safe and durable on job sites than sausage packs
- Can use in both concrete and masonry substrates, including hollow and solid base materials


Cure and Gel Times

BASE MATERIAL (F°/C°)	GEL TIME ²	FULL CURE TIME
110°/ 43°	10 minutes	2 hours
90°/ 32°	14 minutes	2.75 hours
70°/ 21°	16 minutes	6.5 hours
50°/ 10°	30 minutes	24 hours
40°/ 4.4°	46 minutes	48 hours

¹ For concrete temperatures between 40-50°F adhesive must be maintained at a minimum of 50°F during installation.

² Gel time is max time from the end of mixing to when the insertion of the threaded rod or rebar into the adhesive shall be completed.


INSTALLATION STEPS for Carbide-Tipped Bits

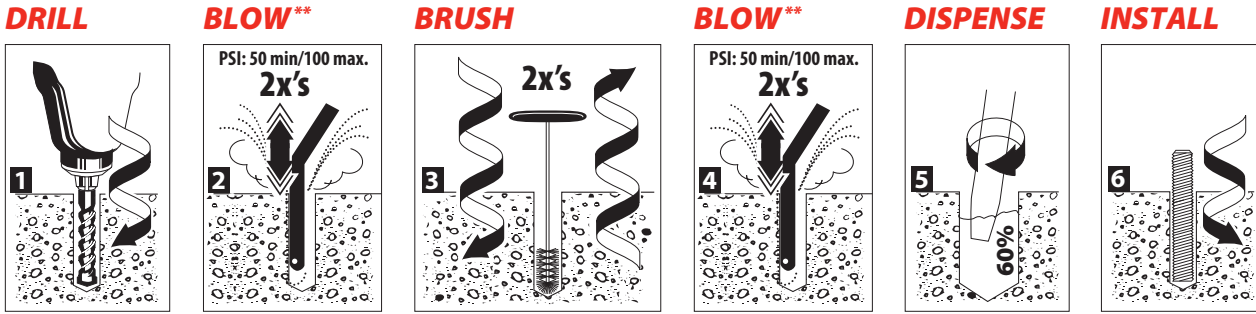

* Damp, submerged and underwater applications require 4x's air, 4x's brushing and 4x's air

** Dust is shown for diagram purposes only. To help mitigate airborne dust and comply with OSHA requirements, we recommend that you either wet the concrete before blowing out the hole, or use a drill dust extractor with your pneumatic air nozzle. We recommend vacuum assisted dust extractors like Milwaukee part numbers 5261-DE or 5317-DE. Call our technical services at (800) 848-5611 for more information."

INSTALLATION STEPS for Core-Drilled Holes

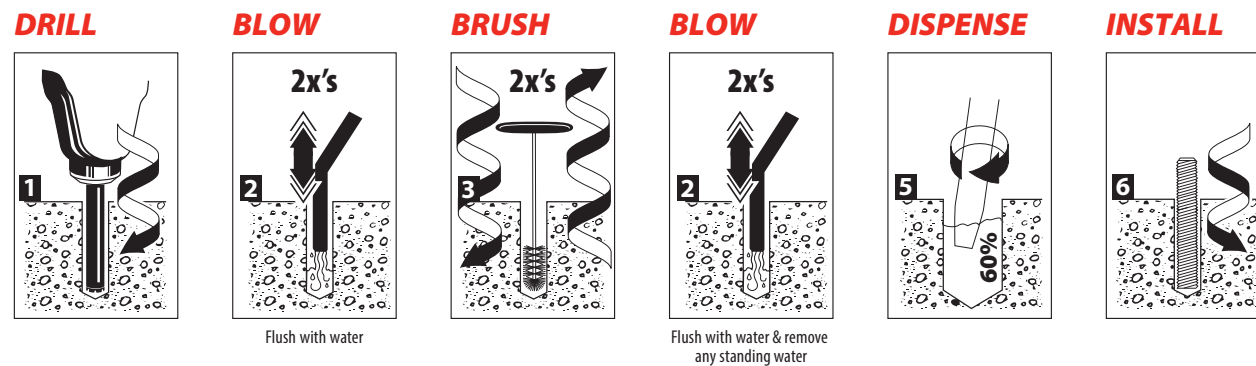


APPROVALS/LISTINGS







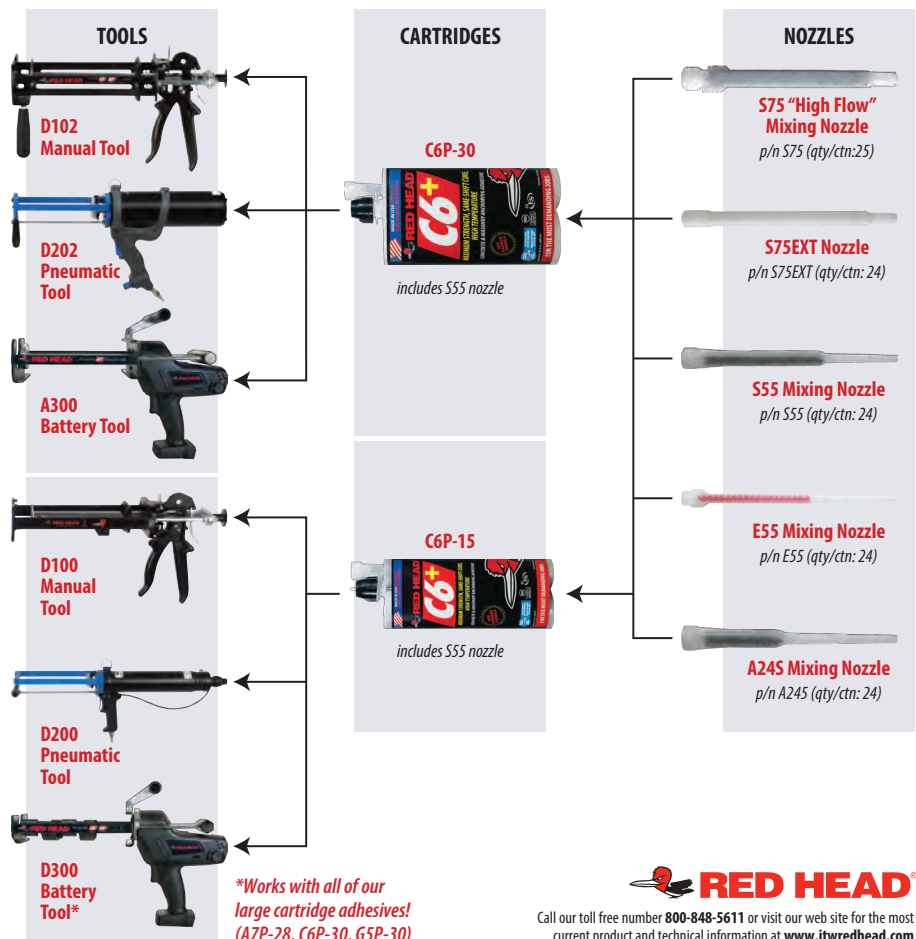

- ICC-ES ESR 4046 (Concrete Report)
- ICC-ES ESR 4109 (Masonry Report)
- 2018, 2015, 2012, 2009, 2006 International Building Code (IBC) Compliant
- Florida Building Code (FBC)
- City of Los Angeles (COLA)
- Department of Transportation (DOT) Listings
- NSF/ANSI 61 Approval for use in Drinking Water System Components
- ASTM C881, Types I, II, IV, and V, Grade 3, Classes B & C
- Rebar fire performance report in accordance with EAD (European Assessment Document)

For the most current approvals/listings visit:
www.itwredhead.com

Selection Guide



C6P-15 fl. oz. Ordering Information

PART NUMBER	DESCRIPTION	BOX QTY	PART NUMBER	DESCRIPTION	BOX QTY
 C6P-15	15.2 Fluid Ounce Red Head C6+ Cartridge with S55 Nozzle	4	 D200	Ergonomic Pneumatic Dispenser for C6P-15 and G5P-15 cartridges	1
 D100	Heavy-Duty 34:1 thrust ratio hand dispenser for C6P-15 and G5P-15 cartridges	1	 D300	Cordless Battery Dispenser for C6P-15 and G5P-15 Cartridge. Includes one battery and charger. Works with all Milwaukee® M18™ batteries	1
 S55	Standard Mixing Nozzle, fits holes for 3/8" diameter anchors and larger. 3-1/2" inch usable length for 3/8" and 1/2" anchors, 8-1/4" usable length for 5/8" anchors and above	24	 S75	High Flow Mixing Nozzle, fits holes for 3/4" diameter anchors and larger. 7-3/8" usable length	24
 E55	Long Mixing Nozzle, fits holes for 3/8" diameter anchors and larger. 5-3/4" inch usable length for 3/8" and 1/2" anchors, 12-5/8" usable length for 5/8" anchors and above	24	 S75EXT	Extension for High Flow Mixing Nozzle for 3/4" diameter anchors and larger. 15-5/8" usable length when attached to S75	24

*See page 65 for nozzle extension tubes and other accessories

ESTIMATING TABLES

C6P-15 15.2 Fluid Ounce Cartridge

Number of Anchoring Installations Per Cartridge* using Threaded Rod or Rebar with C6+ in Solid Concrete

ANCHOR DIA. in.	# rebar	DRILL HOLE DIA. (in.)	EMBEDMENT DEPTH IN INCHES														
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
3/8	#3	7/16	304.5	152.2	101.5	76.1	60.9	50.7	43.5	38.1	33.8	30.4	27.7	25.4	23.4	21.7	20.3
1/2		9/16	184.2	92.1	61.4	46.0	36.8	30.7	26.3	23.0	20.5	18.4	16.7	15.3	14.2	13.2	12.3
	#4	5/8	149.2	74.6	49.7	37.3	29.8	24.9	21.3	18.6	16.6	14.9	13.6	12.4	11.5	10.7	9.9
5/8	#5	3/4	103.6	51.8	34.5	25.9	20.7	17.3	14.8	12.9	11.5	10.4	9.4	8.6	8.0	7.4	6.9
3/4	#6	7/8	76.1	38.1	25.4	19.0	15.2	12.7	10.9	9.5	8.5	7.6	6.9	6.3	5.9	5.4	5.1
7/8	#7	1	58.3	29.1	19.4	14.6	11.7	9.7	8.3	7.3	6.5	5.8	5.3	4.9	4.5	4.2	3.9
1	#8	1-1/8	46.0	23.0	15.3	11.5	9.2	7.7	6.6	5.8	5.1	4.6	4.2	3.8	3.5	3.3	3.1
	#9	1-1/4	37.3	18.6	12.4	9.3	7.5	6.2	5.3	4.7	4.1	3.7	3.4	3.1	2.9	2.7	2.5
1-1/4		1-3/8	30.8	15.4	10.3	7.7	6.2	5.1	4.4	3.9	3.4	3.1	2.8	2.6	2.4	2.2	2.1
	#10	1-1/2	25.9	12.9	8.6	6.5	5.2	4.3	3.7	3.2	2.9	2.6	2.4	2.2	2.0	1.8	1.7
1-1/2"		1-5/8"	22.1	11.0	7.4	5.5	4.4	3.7	3.2	2.8	2.5	2.2	2.0	1.8	1.7	1.6	1.5
	#11	1-3/4	19.0	9.5	6.3	4.8	3.8	3.2	2.7	2.4	2.1	1.9	1.7	1.6	1.5	1.4	1.3









*The estimated number of anchoring installations per cartridge is based upon calculations of filling the hole 60% full of adhesive per the recommendation in our installation instructions. Hole volumes are calculated using ANSI tolerance carbide tipped drill bits. These estimates do not account for any waste.



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



C6P-30.4 fl. oz. Ordering Information

PART NUMBER	DESCRIPTION	BOX QTY	PART NUMBER	DESCRIPTION	BOX QTY
 C6P-30	30.4 Fluid Ounce Red Head C6+ Cartridge with S55 Nozzle	4	 D202	Pneumatic Dispenser for C6P-30 and G5P-30 cartridges	1
 D102	Heavy-Duty 34:1 thrust ratio hand dispenser for C6P-30 and G5P-30 cartridges	1	 A300	Cordless Battery Dispenser for A7P-28, C6P-30 and G5P-30 Cartridge. Includes one battery and charger. Works with all Milwaukee® M18™ batteries (Contact Milwaukee® for more information on batteries)	1
 S55	Standard Mixing Nozzle, fits holes for 3/8" diameter anchors and larger. 3-1/2" inch usable length for 3/8" and 1/2" anchors, 8-1/4" usable length for 5/8" anchors and above	24	 S75	High Flow Mixing Nozzle, fits holes for 3/4" diameter anchors and larger. 7-3/8" usable length	24
 E55	Long Mixing Nozzle, fits holes for 3/8" diameter anchors and larger. 5-3/4" inch usable length for 3/8" and 1/2" anchors, 12-5/8" usable length for 5/8" anchors and above	24	 S75EXT	Extension for High Flow Mixing Nozzle for 3/4" diameter anchors and larger. 15-5/8" usable length when attached to S75	24

*See page 65 for nozzle extension tubes and other accessories

ESTIMATING TABLES

C6P-30

30.4 Fluid Ounce Cartridge

Number of Anchoring Installations Per Cartridge*
using Threaded Rod or Rebar with C6+ in Solid Concrete

ANCHOR DIA.		DRILL HOLE DIA. (in.)	EMBEDMENT DEPTH IN INCHES														
in.	# rebar		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
3/8	#3	7/16	608.9	304.5	203.0	152.2	121.8	101.5	87.0	76.1	67.7	60.9	55.4	50.7	46.8	43.5	40.6
1/2		9/16	368.3	184.2	122.8	92.1	73.7	61.4	52.6	46.0	40.9	36.8	33.5	30.7	28.3	26.3	24.6
	#4	5/8	298.4	149.2	99.5	74.6	59.7	49.7	42.6	37.3	33.2	29.8	27.1	24.9	23.0	21.3	19.9
5/8	#5	3/4	207.2	103.6	69.1	51.8	41.4	34.5	29.6	25.9	23.0	20.7	18.8	17.3	15.9	14.8	13.8
3/4	#6	7/8	152.2	76.1	50.7	38.1	30.4	25.4	21.7	19.0	16.9	15.2	13.8	12.7	11.7	10.9	10.1
7/8	#7	1	116.5	58.3	38.8	29.1	23.3	19.4	16.6	14.6	12.9	11.7	10.6	9.7	9.0	8.3	7.8
1	#8	1-1/8	92.1	46.0	30.7	23.0	18.4	15.3	13.2	11.5	10.2	9.2	8.4	7.7	7.1	6.6	6.1
	#9	1-1/4	74.6	37.3	24.9	18.6	14.9	12.4	10.7	9.3	8.3	7.5	6.8	6.2	5.7	5.3	5.0
1-1/4		1-3/8	61.6	30.8	20.5	15.4	12.3	10.3	8.8	7.7	6.8	6.2	5.6	5.1	4.7	4.4	4.1
	#10	1-1/2	51.8	25.9	17.3	12.9	10.4	8.6	7.4	6.5	5.8	5.2	4.7	4.3	4.0	3.7	3.5
1-1/2		1-5/8	44.1	22.1	14.7	11.0	8.8	7.4	6.3	5.5	4.9	4.4	4.0	3.7	3.4	3.2	2.9
	#11	1-3/4	38.1	19.0	12.7	9.5	7.6	6.3	5.4	4.8	4.2	3.8	3.5	3.2	2.9	2.7	2.5

*The estimated number of anchoring installations per cartridge is based upon calculations of filling the hole 60% full of adhesive per the recommendation in our installation instructions. Hole volumes are calculated using ANSI tolerance carbide tipped drill bits. These estimates do not account for any waste.

PERFORMANCE TABLE

C6+

For the Most Demanding Jobs

Threaded Rod Ultimate Tension and Shear Loads^{1,2,3}
Installed in Solid Concrete

THREADED ROD DIA. (in.)	EMBEDMENT IN CONCRETE (in.)	MAX. CLAMPING FORCE AFTER PROPER CURE (ft./lbs.)	ULTIMATE TENSION (lbs.)			ULTIMATE SHEAR (lbs.)
			3,000 PSI CONCRETE	5,000 PSI CONCRETE	7,000 PSI CONCRETE	3,000 PSI CONCRETE & HIGHER
3/8	1-1/2	9	3,160	3,785	4,405	N/A
	3-3/8		11,640	12,315	12,985	5,200
1/2	2	16	6,075	7,015	7,950	N/A
	4-1/2		20,005	23,305	26,605	11,420
5/8	2-1/2	47	8,570	9,995	11,420	N/A
	5-5/8		24,905	29,015	33,125	18,300
3/4	3	70	12,030	13,570	15,105	N/A
	6-3/4		36,645	42,695	48,740	25,720
7/8	3-1/2	90	15,005	17,335	19,660	N/A
	7-7/8		55,575	70,338	85,100	32,120
1	4	110	17,735	20,390	23,045	N/A
	9		62,250	73,850	85,450	38,520
1-1/4	5	370	34,695	36,935	39,170	N/A
	11-1/4		77,815	90,655	103,495	65,080
1-1/2	13	450	101,085	117,765	134,445	N/A

1 Allowable working loads for the single installations under static loading should not exceed 25% capacity of the Ultimate Load. To calculate the Allowable Load of the anchor rod, divide the Ultimate Load by 4.

2 Performance values are based on the use of high strength threaded rod (ASTM A193 Gr. B7). The use of lower strength rods will result in lower ultimate tension and shear loads.

3 Linear interpolation may be used for intermediate spacing and edge distances.

PERFORMANCE TABLE

C6+

For the Most Demanding Jobs

Threaded Rod Allowable Tension Loads¹
Installed in Solid Concrete

THREADED ROD DIA in.	EMBEDMENT IN CONCRETE in.	ALLOWABLE TENSION LOAD BASED ON CONCRETE STRENGTH (lbs.)			ALLOWABLE TENSION LOAD BASED ON STEEL STRENGTH (lbs.)		
		3,000 psi concrete	5,000 psi concrete	7,000 psi concrete	ASTM A307	ASTM A193 GRADE B7	ASTM F593 AISI 304 SS
3/8	1-1/2	790	945	1,100	2,080	4,340	3,995
	3-3/8	2,910	3,080	3,245	2,080	4,340	3,995
1/2	2	1,520	1,755	1,990	3,730	7,780	7,155
	4-1/2	5,000	5,825	6,650	3,730	7,780	7,155
5/8	2-1/2	2,145	2,500	2,855	5,870	12,230	11,250
	5-5/8	6,225	7,255	8,280	5,870	12,230	11,250
3/4	3	3,010	3,395	3,775	8,490	17,690	14,860
	6-3/4	9,160	10,675	12,185	8,490	17,690	14,860
7/8	3-1/2	3,750	4,335	4,915	11,600	25,510	20,835
	7-7/8	13,895	17,585	21,275	11,600	25,510	20,835
1	4	4,435	5,100	5,760	15,180	31,620	26,560
	9	15,565	18,465	21,365	15,180	31,620	26,560
1-1/4	5	8,675	9,235	9,795	23,800	49,580	34,670
	11-1/4	19,455	22,665	25,875	23,800	49,580	34,670
1-1/2	13	25,270	29,440	33,610	33,720	70,250	47,770

1 Use lower value of either bond or steel strength for allowable tension load.



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



PERFORMANCE TABLE

C6+

For the Most Demanding Jobs

Threaded Rod Allowable Shear Loads¹
Installed in Solid Concrete

THREADED ROD DIA. (in.)	EMBEDMENT IN CONCRETE (in.)	ALLOWABLE SHEAR LOAD BASED ON CONCRETE STRENGTH (lbs.)	ALLOWABLE SHEAR LOAD BASED ON STEEL STRENGTH (lbs.)		
		3,000 psi concrete & higher	ASTM A307	ASTM A193 GRADE B7	ASTM F593 AISI 304 SS
3/8	1-1/2	N/A	1,040	2,170	1,995
	3-3/8	1,300	1,040	2,170	1,995
1/2	2	N/A	1,870	3,895	3,585
	4-1/2	2,855	1,870	3,895	3,585
5/8	2-1/2	N/A	2,940	6,125	5,635
	5-5/8	4,575	2,940	6,125	5,635
3/4	3	N/A	4,250	8,855	7,440
	6-3/4	6,430	4,250	8,855	7,440
7/8	3-1/2	N/A	5,800	12,760	10,730
	7-7/8	8,030	5,800	12,760	10,730
1	4	N/A	7,590	15,810	13,285
	9	9,630	7,590	15,810	13,285
1-1/4	5	N/A	11,900	24,790	18,840
	11-1/4	16,270	11,900	24,790	18,840

¹ Use lower value of either concrete or steel strength for allowable shear load.

PERFORMANCE TABLE

C6+

For the Most Demanding Jobs

Rebar Ultimate Tension Loads^{1,2,3}
Installed in Solid Concrete

REINFORCING BAR	EMBEDMENT IN CONCRETE (in.)	ULTIMATE TENSION (lbs.)			ULTIMATE YIELD STRENGTH GRADE 60 REBAR (lbs.)	ULTIMATE TENSILE STRENGTH GRADE 60 REBAR (lbs.)
		3,000 psi concrete	5,000 psi concrete	7,000 psi concrete		
#3	1-1/2	3,160	3,785	4,405	6,600	9,900
	3-3/8	11,640	12,315	12,985		
#4	2	6,075	7,015	7,950	12,000	18,000
	4-1/2	20,005	23,305	26,605		
#5	2-1/2	8,570	9,995	11,420	18,600	27,900
	5-5/8	24,905	29,015	33,125		
#6	3	12,030	13,570	15,105	26,400	39,600
	6-3/4	36,645	42,695	48,740		
#7	3-1/2	15,005	17,335	19,660	36,000	54,000
	7-7/8	55,575	70,338	85,100		
#8	4	17,735	20,390	23,045	47,400	71,100
	9	62,250	73,850	85,450		
#10	5	34,695	36,935	39,170	79,200	114,300
	11-1/4	77,815	90,655	103,495		
#11	13	101,085	117,764	134,443	93,600	140,400

¹ Allowable working loads for the single installation under static loading should not exceed 25% capacity of the Ultimate Load. To calculate the Allowable Load of the anchor, divide the ultimate load by 4.

² Performance values are based on the use of ASTM A615 Grade 60 reinforcing bar. The use of lower strength rebar will result in lower ultimate tension loads.

³ SHEAR DATA: Provided the distance from the rebar to the edge of the concrete member exceeds 1.25 times the embedment depth of the rebar, calculate the ultimate shear load for the rebar anchorage as 60% of the ultimate tensile strength of the rebar.

PERFORMANCE REFERENCE TABLE

C6+

For the Most Demanding Jobs

Threaded Rod and Rebar Installation in Solid Concrete
Edge/Spacing Distance Load Factor Summary^{1,2}

LOAD FACTOR	DISTANCE FROM EDGE OF CONCRETE	LOAD FACTOR	DISTANCE FROM ANOTHER ANCHOR
Critical Edge Distance—Tension		Critical Spacing—Tension	
100% Tension Load	→ 1.25 x Anchor Embedment (or greater)	100% Tension Load	→ 1.50 x Anchor Embedment (or greater)
Minimum Edge Distance—Tension		Minimum Spacing—Tension	
70% Tension Load	→ 0.50 x Anchor Embedment	75% Tension Load	→ 0.75 x Anchor Embedment
Critical Edge Distance—Shear		Critical Spacing—Shear	
100% Shear Load	→ 1.25 x Anchor Embedment (or greater)	100% Shear Load	→ 1.50 x Anchor Embedment (or greater)
Minimum Edge Distance—Shear		Minimum Spacing—Shear	
30% Shear Load	→ 0.30 x Anchor Embedment	30% Shear Load	→ 0.50 x Anchor Embedment

¹ Use linear interpolation for load factors at edge distances or spacing distances between critical and minimum.

² Anchors are affected by multiple combination of spacing and/or edge distance loading and direction of the loading. Use the product of tension and shear loading factors in design.

STRENGTH DESIGN TABLE

C6+

For the Most Demanding Jobs

**Threaded Rod Tension (lbf) and Shear (lbf) Loads
in Uncracked Concrete^{1,2,3,4} ASTM A193 B7**

ANCHOR DIAMETER (in.)	EMBEDMENT DEPTH (in.)	TENSION (lbf)						SHEAR (lbf)
		2500 psi	3000 psi	4000 psi	5000 psi	6000 psi	7000-8000 psi	2500-8000 psi
3/8	3-3/8	4,835	5,295	6,115	6,380	6,380	6,380	3,775
	4-1/2	7,265	7,265	7,265	7,265	7,265	7,265	3,775
	7-1/2	7,265	7,265	7,265	7,265	7,265	7,265	3,775
1/2	4-1/2	7,445	8,155	9,415	10,530	10,980	10,980	6,915
	6	11,460	12,555	13,305	13,305	13,305	13,305	6,915
	10	13,305	13,305	13,305	13,305	13,305	13,305	6,915
5/8	5-5/8	10,405	11,395	13,160	14,715	16,120	16,615	11,015
	7-1/2	16,020	17,550	20,265	21,185	21,185	21,185	11,015
	12-1/2	21,185	21,185	21,185	21,185	21,185	21,185	11,015
3/4	6-3/4	13,675	14,980	17,300	19,345	19,590	19,590	16,305
	9	21,060	23,070	26,125	26,125	26,125	26,125	16,305
	15	31,355	31,355	31,355	31,355	31,355	31,355	16,305
7/8	7-7/8	17,235	18,880	21,800	24,375	25,715	25,715	22,505
	10-1/2	26,535	29,070	33,565	34,285	34,285	34,285	22,505
	17-1/2	43,280	43,280	43,280	43,280	43,280	43,280	22,505
1	9	21,060	23,070	26,635	29,780	32,420	32,420	29,525
	12	32,420	35,515	41,010	43,230	43,230	43,230	29,525
	20	56,780	56,780	56,780	56,780	56,780	56,780	29,525
1-1/4	11-1/4	29,430	32,240	37,225	41,620	45,595	46,895	47,240
	15	45,310	49,635	57,315	62,525	62,525	62,525	47,240
	25	90,855	90,855	90,855	90,855	90,855	90,855	47,240

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths are for dry, uncracked concrete with periodic inspection

4 Bond strengths are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).

STRENGTH DESIGN TABLE

C6+

For the Most Demanding Jobs

**Threaded Rod Tension (lbf) and Shear (lbf) Loads
in 4,000 psi Uncracked Concrete^{1,2,3,4}**

ANCHOR DIAMETER (in.)	EMBEDMENT DEPTH (in.)	ASTM A193 B7 THREAD ROD		CARBON STEEL A36		STAINLESS STEEL F593	
		TENSION (lbf)	SHEAR (lbf)	TENSION (lbf)	SHEAR (lbf)	TENSION (lbf)	SHEAR (lbf)
3/8	3-3/8	6,115	3,775	3,375	1,755	4,785	2,280
	4-1/2	7,265	3,775	3,375	1,755	4,785	2,280
	7-1/2	7,265	3,775	3,375	1,755	4,785	2,280
1/2	4-1/2	9,415	6,915	6,170	3,210	8,760	4,040
	6	13,305	6,915	6,170	3,210	8,760	4,040
	10	13,305	6,915	6,170	3,210	8,760	4,040
5/8	5-5/8	13,160	11,015	9,830	5,115	13,160	6,440
	7-1/2	20,265	11,015	9,830	5,115	13,955	6,440
	12-1/2	21,185	11,015	9,830	5,115	13,955	6,440
3/4	6-3/4	17,300	16,305	14,550	7,565	16,500	7,610
	9	26,125	16,305	14,550	7,565	16,500	7,610
	15	31,355	16,305	14,550	7,565	16,500	7,610
7/8	7-7/8	21,800	22,505	20,085	10,445	21,800	10,530
	10-1/2	33,565	22,505	20,085	10,445	22,820	10,530
	17-1/2	43,280	22,505	20,085	10,445	22,820	10,530
1	9	26,635	29,525	26,345	13,700	26,635	13,815
	12	41,010	29,525	26,345	13,700	29,935	13,815
	20	56,780	29,525	26,345	13,700	29,935	13,815
1-1/4	11-1/4	37,225	47,240	37,225	21,920	37,225	22,090
	15	57,315	47,240	42,155	21,920	47,865	22,090
	25	90,855	47,240	42,155	21,920	47,865	22,090

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths are for dry, uncracked concrete with periodic inspection

4 Bond strengths are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



RED HEAD®

STRENGTH DESIGN TABLE

C6+

For the Most Demanding Jobs

**Threaded Rod Tension (lbf) and Shear (lbf) Loads
in Cracked Concrete^{1,2,3,4} ASTM A193 B7**

ANCHOR DIAMETER (in.)	EMBEDMENT DEPTH (in.)	TENSION (lbf)						SHEAR (lbf)
		2500 psi	3000 psi	4000 psi	5000 psi	6000 psi	7000-8000 psi	2500-8000 psi
3/8	3-3/8	2,905	2,905	2,905	2,905	2,905	2,905	3,775
	4-1/2	3,875	3,875	3,875	3,875	3,875	3,875	3,775
	7-1/2	6,460	6,460	6,460	6,460	6,460	6,460	3,775
1/2	4-1/2	5,165	5,165	5,165	5,165	5,165	5,165	6,915
	6	6,890	6,890	6,890	6,890	6,890	6,890	6,915
	10	11,485	11,485	11,485	11,485	11,485	11,485	6,915
5/8	5-5/8	7,370	8,070	8,075	8,075	8,075	8,075	11,015
	7-1/2	10,765	10,765	10,765	10,765	10,765	10,765	11,015
	12-1/2	17,945	17,945	17,945	17,945	17,945	17,945	11,015
3/4	6-3/4	9,685	10,610	10,975	10,975	10,975	10,975	15,365
	9	14,635	14,635	14,635	14,635	14,635	14,635	16,305
	15	24,395	24,395	24,395	24,395	24,395	24,395	16,305
7/8	7-7/8	12,210	13,375	14,940	14,940	14,940	14,940	20,915
	10-1/2	18,795	19,920	19,920	19,920	19,920	19,920	22,505
	17-1/2	33,200	33,200	33,200	33,200	33,200	33,200	22,505
1	9	14,915	16,340	18,865	19,515	19,515	19,515	27,320
	12	22,965	25,155	26,020	26,020	26,020	26,020	29,525
	20	43,365	43,365	43,365	43,365	43,365	43,365	29,525
1-1/4	11-1/4	20,845	22,835	26,370	29,480	32,295	33,285	46,600
	15	32,095	35,160	40,600	44,380	44,380	44,380	47,240
	25	69,060	73,970	73,970	73,970	73,970	73,970	47,240

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths are for dry, cracked concrete with periodic inspection

4 Bond strengths are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).

STRENGTH DESIGN TABLE

C6+

For the Most Demanding Jobs

**Threaded Rod Tension (lbf) and Shear (lbf) Loads
in 4,000 psi Cracked Concrete^{1,2,3,4}**

ANCHOR DIAMETER (in.)	EMBEDMENT DEPTH (in.)	ASTM A193 B7 THREAD ROD		CARBON STEEL A36		STAINLESS STEEL F593	
		TENSION (lbf)	SHEAR (lbf)	TENSION (lbf)	SHEAR (lbf)	TENSION (lbf)	SHEAR (lbf)
3/8	3-3/8	2,905	3,775	3,375	1,755	4,785	2,280
	4-1/2	3,875	3,775	3,375	1,755	4,785	2,280
	7-1/2	6,460	3,775	3,375	1,755	4,785	2,280
1/2	4-1/2	5,165	6,915	6,170	3,210	8,760	4,040
	6	6,890	6,915	6,170	3,210	8,760	4,040
	10	11,485	6,915	6,170	3,210	8,760	4,040
5/8	5-5/8	8,075	11,015	9,830	5,115	13,160	6,440
	7-1/2	10,765	11,015	9,830	5,115	13,955	6,440
	12-1/2	17,945	11,015	9,830	5,115	13,955	6,440
3/4	6-3/4	10,975	15,365	14,550	7,565	16,500	7,610
	9	14,635	16,305	14,550	7,565	16,500	7,610
	15	24,395	16,305	14,550	7,565	16,500	7,610
7/8	7-7/8	14,940	20,915	20,085	10,445	21,800	10,530
	10-1/2	19,920	22,505	20,085	10,445	22,820	10,530
	17-1/2	33,200	22,505	20,085	10,445	22,820	10,530
1	9	19,515	27,320	26,345	13,700	26,635	13,815
	12	26,020	29,525	26,345	13,700	29,935	13,815
	20	43,365	29,525	26,345	13,700	29,935	13,815
1-1/4	11-1/4	33,285	46,600	37,225	21,920	37,225	22,090
	15	44,380	47,240	42,155	21,920	47,865	22,090
	25	73,970	47,240	42,155	21,920	47,865	22,090

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths are for dry, cracked concrete with periodic inspection

4 Bond strengths are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).

STRENGTH DESIGN TABLE

C6+

For the Most Demanding Jobs

**Rebar Tension (lbf) and Shear (lbf) Loads
in Uncracked Concrete^{1,2,3,4} ASTM A615 Grade 60**

ANCHOR DIAMETER # Rebar	EMBEDMENT DEPTH (in.)	TENSION (lbf)						SHEAR (lbf)
		2500 psi	3000 psi	4000 psi	5000 psi	6000 psi	7000-8000 psi	2500-8000 psi
#3	3-3/8	4,835	5,295	6,110	6,110	6,110	6,110	3,560
	4-1/2	6,435	6,435	6,435	6,435	6,435	6,435	3,560
	7-1/2	4,835	6,435	6,435	6,435	6,435	6,435	3,560
#4	4-1/2	7,445	8,155	9,415	10,450	10,450	10,450	6,480
	6	11,460	11,700	11,700	11,700	11,700	11,700	6,480
	10	11,700	11,700	11,700	11,700	11,700	11,700	6,480
#5	5-5/8	10,405	11,395	13,160	14,715	15,650	15,650	10,040
	7-1/2	16,020	17,550	18,135	18,135	18,135	18,135	10,040
	12-1/2	18,135	18,135	18,135	18,135	18,135	18,135	10,040
#6	6-3/4	13,675	14,980	17,300	18,235	18,235	18,235	14,255
	9	21,060	23,070	24,315	24,315	24,315	24,315	14,255
	15	25,740	25,740	25,740	25,740	25,740	25,740	14,255
#7	7-7/8	17,235	18,880	21,800	23,690	23,690	23,690	19,440
	10-1/2	26,535	29,070	31,590	31,590	31,590	31,590	19,440
	17-1/2	35,100	35,100	35,100	35,100	35,100	35,100	19,440
#8	9	21,060	23,070	26,635	29,465	29,465	29,465	25,595
	12	32,420	35,515	39,290	39,290	39,290	39,290	25,595
	20	46,215	46,215	46,215	46,215	46,215	46,215	25,595
#9	10-1/8	25,130	27,525	31,785	35,525	35,525	35,525	32,400
	13-1/2	38,690	42,380	47,365	47,365	47,365	47,365	32,400
	22-1/2	58,500	58,500	58,500	58,500	58,500	58,500	32,400
#10	11-1/4	29,430	32,240	37,225	41,620	42,210	42,210	41,145
	15	45,310	49,635	56,285	56,285	56,285	56,285	41,145
	25	74,295	74,295	74,295	74,295	74,295	74,295	41,145

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths are for dry, uncracked concrete with periodic inspection

4 Bond strengths are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).

STRENGTH DESIGN TABLE

C6+

For the Most Demanding Jobs

**Rebar Tension (lbf) and Shear (lbf) Loads
in Cracked Concrete^{1,2,3,4} ASTM A615 Grade 60**

ANCHOR DIAMETER # Rebar	EMBEDMENT DEPTH (in.)	TENSION (lbf)						SHEAR (lbf)
		2500 psi	3000 psi	4000 psi	5000 psi	6000 psi	7000-8000 psi	2500-8000 psi
#3	3-3/8	2,825	2,905	2,905	2,905	2,905	3,560	3,560
	4-1/2	3,875	3,875	3,875	3,875	3,875	3,560	3,560
	7-1/2	6,435	6,435	6,435	6,435	6,435	3,560	3,560
#4	4-1/2	5,165	5,165	5,165	5,165	5,165	6,480	6,480
	6	6,890	6,890	6,890	6,890	6,890	6,480	6,480
	10	11,485	11,485	11,485	11,485	11,485	6,480	6,480
#5	5-5/8	7,370	7,965	7,965	7,965	7,965	10,040	10,040
	7-1/2	10,620	10,620	10,620	10,620	10,620	10,040	10,040
	12-1/2	17,705	17,705	17,705	17,705	17,705	10,040	10,040
#6	6-3/4	9,685	10,405	10,405	10,405	10,405	14,255	14,255
	9	13,875	13,875	13,875	13,875	13,875	14,255	14,255
	15	23,130	23,130	23,130	23,130	23,130	14,255	14,255
#7	7-7/8	12,210	13,375	13,570	13,570	13,570	19,000	19,440
	10-1/2	18,095	18,095	18,095	18,095	18,095	19,440	19,440
	17-1/2	30,160	30,160	30,160	30,160	30,160	19,440	19,440
#8	9	14,915	16,340	16,950	16,950	16,950	23,730	25,595
	12	22,600	22,600	22,600	22,600	22,600	25,595	25,595
	20	37,665	37,665	37,665	37,665	37,665	25,595	25,595
#9	10-1/8	17,800	19,495	20,465	20,465	20,465	28,655	32,400
	13-1/2	27,290	27,290	27,290	27,290	27,290	32,400	32,400
	22-1/2	45,485	45,485	45,485	45,485	45,485	32,400	32,400
#10	11-1/4	20,845	22,835	26,370	26,660	26,660	37,325	41,145
	15	32,095	35,160	35,545	35,545	35,545	41,145	41,145
	25	59,245	59,245	59,245	59,245	59,245	41,145	41,145

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths are for dry, cracked concrete with periodic inspection

4 Bond strengths are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



RED HEAD®

MASONRY DESIGN TABLE

C6+

For the Most Demanding Jobs

Grout-filled Concrete Block: Threaded Rod Allowable Tension and Shear Loads Based on Steel Design Information for U.S. Customary Unit^{1,2,3}

Anchor Diameter (in.)	Tension (lb)			Shear (lb)		
	ASTM A307 F _u = 60 ksi	ASTM A193 Grade B7 F _u = 125 ksi	ASTM F593 SS 304 F _u = 100 ksi	ASTM A307 F _u = 60 ksi	ASTM A193 Grade B7 F _u = 125 ksi	ASTM F593 SS 304 F _u = 100 ksi
3/8	2,185	4,555	3,645	1,125	2,345	1,875
1/2	3,885	8,100	6,480	2,000	4,170	3,335
5/8	6,075	12,655	10,125	3,130	6,520	5,215
3/4	8,750	18,225	12,390	4,505	9,390	6,385

For SI: 1 inch = 25.4mm, 1 lbf = 4.45N, 1ft-lbf = 1.356 N-M, 1 psi = 0.006895 MPa

1 Allowable load used in the design must be the lesser of bond values and tabulated steel element values.

2 Allowable tension and shear loads for threaded rods to resist short term loads, such as wind or seismic, must be calculated in accordance with Section 4.1 of ICC ESR 4109 as applicable.

3 Allowable steel loads are based on allowable tension and shear stresses equal to 0.33X F_u and 0.17X F_u, respectively.

MASONRY DESIGN TABLE

C6+

For the Most Demanding Jobs

Grout-filled Concrete Block: Threaded Rod Allowable Tension Loads with Reduction Factors^{1,2,3,4,7,9,10,12}

Threaded Rod Size (in.)	Minimum Embedment (inches)	Load at s _{cr} and c _{cr} (lb)	Spacing ⁵			Edge Distance ⁶		
			Critical s _{cr} (inches)	Minimum s _{min} (inches)	Load reduction factor for s _{min} ⁸	Critical c _{cr} (inches)	Minimum c _{min} (inches)	Load reduction factor for c _{min} ⁸
3/8	3-3/8	945	13.5	4	1.00	12	4	0.87
1/2	4-1/2	1,395	18	4	0.50	20	4	0.68
5/8	5-5/8	1,825	22.5	4	0.50	20	4	0.68
3/4	6-3/4	2,085	27	4	0.50	20	4	0.68

For SI: 1 inch = 25.4mm, 1 lbf = 0.0044kN, 1 ksi = 6.894 MPa

See footnotes below

MASONRY DESIGN TABLE

C6+

For the Most Demanding Jobs

Grout-filled Concrete Block: Threaded Rod Allowable Shear Loads with Reduction Factors^{1,2,3,4,7,9,10,12}

Threaded Rod Size (in.)	Minimum Embedment (inches)	Load at s _{cr} and c _{cr} ⊥ to edge (lb)	Spacing ⁵			Edge Distance ⁶		
			Critical s _{cr} (inches)	Minimum s _{min} (inches)	Load reduction factor for s _{min} ⁸	Critical c _{cr} (inches)	Minimum c _{min} (inches)	Load reduction factor for c _{min} ⁸
3/8	3-3/8	825	13.5	4	0.50	12	4	0.87
1/2	4-1/2	1,560	18	4	0.50	20	4	0.56
5/8	5-5/8	2,680	22.5	4	0.50	20	4	0.30
3/4	6-3/4	3,180	27	4	0.50	20	4	0.27

For SI: 1 inch = 25.4mm, 1 lbf = 0.0044kN, 1 ksi = 6.894 MPa

1 All values are for anchors installed in fully grouted concrete masonry with minimum masonry strength of 1500 psi (10.3 MPa). Concrete masonry units must be light-, medium-, or normal-weight conforming to ASTM C 90. Allowable loads have been calculated using a safety factor of 5.0.

3 Anchors may be installed in any location in the face of the masonry wall (cell, web, bed joint) as shown in Figure 2 of ICC ESR 4109.

4 A maximum of two anchors may be installed in a single masonry cell in accordance with the spacing and edge or end distance requirements. Embedment is measured from the outside surface of the concrete masonry unit to the embedded end of the anchor.

5 The critical spacing distance, s_{cr}, is the anchor spacing where full load values in the table may be used. The minimum spacing distance, s_{min}, is the minimum anchor spacing for which values are available and installation is permitted. Spacing distance is measured from the centerline to centerline between two anchors.

6 The critical edge or end distance, c_{cr}, is the distance where full load values in the table may be used. The minimum edge or end distance, c_{min}, is the minimum distance for which values are available and installation is permitted. Edge or end distance is measured from anchor centerline to the closest unrestrained edge.

7 The tabulated values are applicable for anchors in the ends of grout-filled concrete masonry units where minimum edge distances are maintained.

8 Load values for anchors installed less than s_{cr} and c_{cr} must be multiplied by the appropriate load reduction factor based on actual spacing (s) or edge distance (c). Load factors are multiplicative; both spacing and edge reduction factors must be considered.

9 Linear interpolation of load values between minimum spacing (s_{min}) and critical spacing (s_{cr}) and between minimum edge or end distance (c_{min}) and critical edge or end distance (c_{cr}) is permitted.

10 Concrete masonry width (wall thickness) must be equal to or greater than 1.5 times the anchor embedment depth (e.g. 3/8-inch- and 1/2-inch-diameter anchors are permitted in minimum nominally 6-inch-thick concrete masonry). The 5/8- and 3/4-inch-diameter anchors must be installed in minimum nominally 8-inch-thick concrete masonry.

11 Allowable loads must be the lesser of the adjusted masonry or bond values tabulated above and the steel strength values given in Table 2 of ICC ESR 4109.

12 Tabulated allowable bond loads must be adjusted for increased in-service base material temperatures in accordance with Figure 1 of ICC ESR 4109 as applicable.

MASONRY DESIGN TABLE

C6+

For the Most Demanding Jobs

Grout-filled Concrete Block: Rebar Allowable Tension and Shear Loads Based on Steel Design Information for U.S. Customary Unit^{1,2,3}

Rebar Size	Tension (lb) ASTM A615, Grade 60	Shear (lb) ASTM A615, Grade 60
#3	3,270	1,685
#4	5,940	3,060
#5	9,205	4,745
#6	13,070	6,730

For SI: 1 inch = 25.4mm, 1 lbf = 4.45N, 1ft-lbf = 1.356 N-M, 1 psi = 0.006895 MPa

- Allowable load used in the design must be the lesser of bond values and tabulated steel element values.
- Allowable tension and shear loads for threaded rods to resist short term loads, such as wind or seismic, must be calculated in accordance with Section 4.1 of ICC ESR 4109 as applicable.
- Allowable steel loads are based on allowable tension and shear stresses equal to $0.33X F_u$ and $0.17X F_u$, respectively.

MASONRY DESIGN TABLE

C6+

For the Most Demanding Jobs

Grout-filled Concrete Block: Rebar Allowable Tension Loads with Reduction Factors^{1,2,3,4,7,9,10,12}

Rebar Size	Minimum Embedment (inches)	Load at s_{cr} and c_{cr} (lb)	Spacing ⁵			Edge Distance ⁶		
			Critical s_{cr} (inches)	Minimum s_{min} (inches)	Load reduction factor for s_{min} ⁸	Critical c_{cr} (inches)	Minimum c_{min} (inches)	Load reduction factor for c_{min} ⁸
#3	3-3/8	785	13.5	4	1.00	12	4	0.87
#4	4-1/2	1,355	18	4	0.50	20	4	0.68
#5	5-5/8	2,060	22.5	4	0.50	20	4	0.68
#6	6-3/4	2,415	27	4	0.50	20	4	0.68

For SI: 1 inch = 25.4mm, 1 lbf = 0.0044kN, 1 ksi = 6.894 MPa

See footnotes below

MASONRY DESIGN TABLE

C6+

For the Most Demanding Jobs

Grout-filled Concrete Block: Rebar Allowable Shear Loads with Reduction Factors^{1,2,3,4,7,9,10,12}

Rebar Size	Minimum Embedment (inches)	Load at s_{cr} and c_{cr} to edge (lb)	Spacing ⁵			Edge Distance ⁶		
			Critical s_{cr} (inches)	Minimum s_{min} (inches)	Load reduction factor for s_{min} ⁸	Critical c_{cr} (inches)	Minimum c_{min} (inches)	Load reduction factor for c_{min} ⁸
#3	3-3/8	1,230	13.5	4	0.50	12	4	
#4	4-1/2	2,340	18	4	0.50	12	4	
#5	5-5/8	3,600	22.5	4	0.50	20	4	
#6	6-3/4	3,685	27	4	0.50	20	4	

For SI: 1 inch = 25.4 mm; 1 lbf = 0.0044 kN, 1 ksi = 6.894 MPa.

- All values are for anchors installed in fully grouted concrete masonry with minimum masonry strength of 1500 psi (10.3 MPa). Concrete masonry units must be light-, medium-, or normal-weight conforming to ASTM C 90. Allowable loads have been calculated using a safety factor of 5.0.
- Anchors may be installed in any location in the face of the masonry wall (cell, web, bed joint) as shown in figure 2 of ICC ESR 4901.
- A maximum of two anchors may be installed in a single masonry cell in accordance with the spacing and edge or end distance requirements. Embedment is measured from the outside surface of the concrete masonry unit to the embedded end of the anchor.
- The critical spacing distance, s_{cr} , is the anchor spacing where full load values in the table may be used. The minimum spacing distance, s_{min} , is the minimum anchor spacing for which values are available and installation is permitted. Spacing distance is measured from the centerline to centerline between two anchors.
- The critical edge or end distance, c_{cr} , is the distance where full load values in the table may be used. The minimum edge or end distance, c_{min} , is the minimum distance for which values are available and installation is permitted. Edge or end distance is measured from anchor centerline to the closest unrestrained edge.
- The tabulated values are applicable for anchors in the ends of grout-filled concrete masonry units where minimum edge distances are maintained.
- Load values for anchors installed less than s_{cr} and c_{cr} must be multiplied by the appropriate load reduction factor based on actual spacing (s) or edge distance (c). Load factors are multiplicative; both spacing and edge reduction factors must be considered.
- Linear interpolation of load values between minimum spacing (s_{min}) and critical spacing (s_{cr}) and between minimum edge or end distance (c_{min}) and critical edge or end distance (c_{cr}) is permitted.
- Concrete masonry width (wall thickness) must be equal to or greater than 1.5 times the anchor embedment depth (e.g. No. 3 and No. 4 reinforcing bars are permitted in minimum nominally 6-inch-thick concrete masonry). No. 5 and No. 6 reinforcing bars must be installed in minimum nominally 8-inch-thick concrete masonry.
- Allowable loads must be the lesser of the adjusted masonry or bond values tabulated above and the steel strength values given in Table 4 of ICC ESR 4901.
- Tabulated allowable bond loads must be adjusted for increased in-service base material temperatures in accordance with Figure 1 of ICC ESR 4901.



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



G5+

Everyday Epoxy



G5P-15

G5P-30



**MADE IN USA
WITH U.S. AND
GLOBAL MATERIALS**

DESCRIPTION/SUGGESTED SPECIFICATIONS*

Economical, general-purpose adhesive for warm-weather anchoring applications

Red Head G5+ is a reliable general-purpose adhesive that is backed by many DOT approvals and ICC-ES listings for cracked, uncracked concrete, and seismic conditions. The new G5+ is also Buy American compliant and helps to support jobs here in the U.S.

- At least 50% stronger than the old Epcon G5 for threaded rod in cracked concrete and with seismic conditions
- Cures 3x faster than the old Epcon G5 formula
- Now works down to 40°F, and all the way up to 110°F
- ICC-ES listing for concrete (uncracked and cracked concrete, and all seismic conditions)
- At least 10 minutes of nozzle life (10 mins. at 110°F)
- Made In USA with U.S. and Global Components
- Can be used in oversized and core drilled holes
- 24-month shelf life
- NSF/ANSI 61
- Store between 50°F and 95°F in a cool, dry place

ADVANTAGES

- Get more pull out strength with Red Head G5+ vs. other general-purpose adhesives (per comparison of data in ICC-ES reports)
- Continue to work on chilly mornings, with curing abilities now down to 40°F
- ICC-ES listing for all wet conditions (including underwater)
- More time to set anchors in warm weather with at least 10 minutes of nozzle life
- More safe and durable on job sites than sausage packs
- Help support US jobs with G5+

Cure and Gel Times

BASE MATERIAL (F°/C°)	GEL TIME ²	FULL CURE TIME
110°/ 43°	10 minutes	4 hours
90°/ 32°	14 minutes	6 hours
70°/ 21°	16 minutes	8 hours
50°/ 10°	30 minutes	30 hours
40°/ 4.4°	46 minutes	48 hours


APPROVALS/LISTINGS

- ICC-ES ESR 4138 (Concrete Report)
- 2018, 2015, 2012, 2009, 2006 International Building Code (IBC) Compliant
- Florida Building Code (FBC)
- City of Los Angeles (COLA)
- Extensive Department of Transportation (DOT) Listings
- NSF/ANSI 61 Approval for use in Drinking Water System Components
- ASTM C881, Types I, II, IV, and V, Grade 3, Classes B & C


For the most current approvals/listings visit:
www.itwredhead.com

INSTALLATION STEPS for Carbide-Tipped Bits*


DRILL

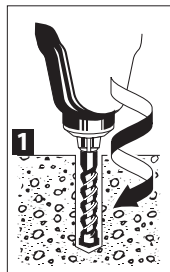


BLOW**

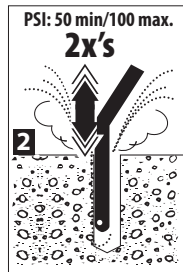


BRUSH

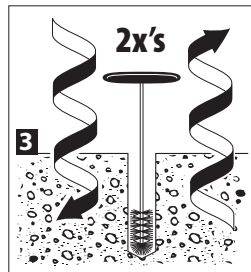


BLOW**

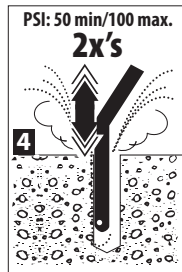

DISPENSE***



INSTALL




* Damp, submerged and underwater applications require 4x's air, 4x's brushing and 4x's air







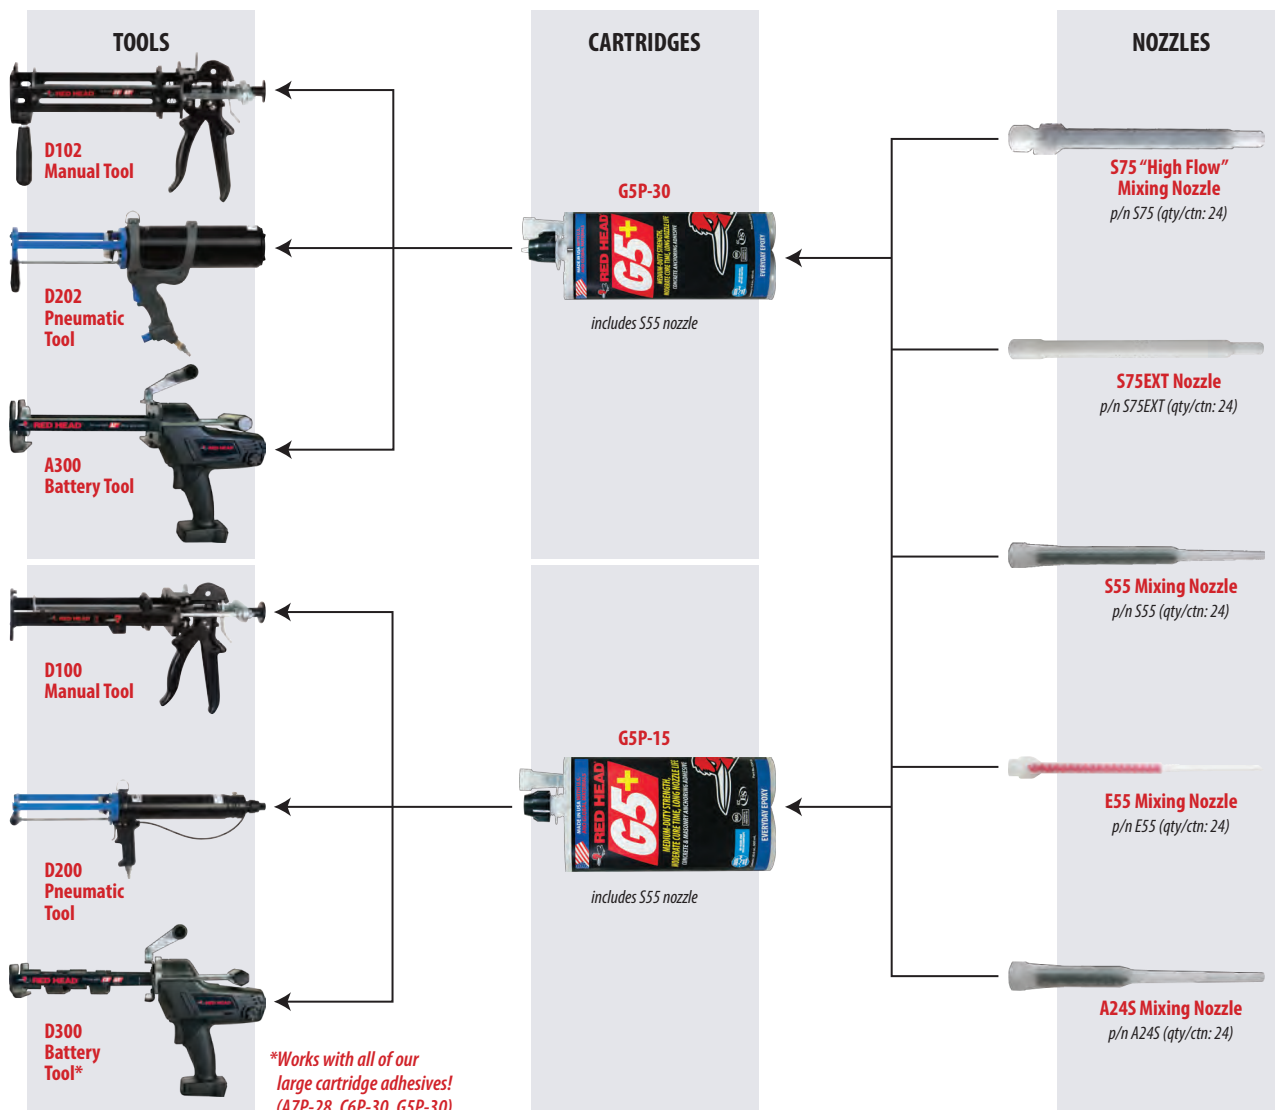

** Dust is shown for diagram purposes only. To help mitigate airborne dust and comply with OSHA requirements, we recommend that you either wet the concrete before blowing out the hole, or use a drill dust extractor with your pneumatic air nozzle. We recommend vacuum assisted dust extractors like Milwaukee part numbers 5261-DE or 5317-DE. Call our technical services at (800) 848-5611 for more information.

*** Dispense mixed adhesive outside of hole until uniform color is achieved.

Selection Guide



G5P-15 fl. oz. Ordering Information

PART NUMBER	DESCRIPTION	BOX QTY	PART NUMBER	DESCRIPTION	BOX QTY
 G5P-15	15.2 Fluid Ounce Red Head C6+ Cartridge with S55 Nozzle	4	 D200	Ergonomic Pneumatic Dispenser for C6P-15 and G5P-15 cartridges	1
 D100	Heavy-Duty 34:1 thrust ratio hand dispenser for C6P-15 and G5P-15 cartridges	1	 D300	Cordless Battery Dispenser for C6P-15 and G5P-15 Cartridge. Includes one battery and charger. Works with all Milwaukee® M18™ batteries	1
 S55	Standard Mixing Nozzle, fits holes for 3/8" diameter anchors and larger. 3-1/2" inch usable length for 3/8" and 1/2" anchors, 8-1/4" usable length for 5/8" anchors and above	24	 S75	High Flow Mixing Nozzle, fits holes for 3/4" diameter anchors and larger. 7-3/8" usable length	24
 E55	Long Mixing Nozzle, fits holes for 3/8" diameter anchors and larger. 5-3/4" inch usable length for 3/8" and 1/2" anchors, 12-5/8" usable length for 5/8" anchors and above	24	 S75EXT	Extension for High Flow Mixing Nozzle for 3/4" diameter anchors and larger. 15-5/8" usable length when attached to S75	24

*See page 65 for nozzle extension tubes and other accessories

ESTIMATING TABLES

G5P-30









15.2 Fluid Ounce Cartridge

**Number of Anchoring Installations Per Cartridge*
using Threaded Rod or Rebar with G5+ in Solid Concrete**

ANCHOR DIA. in.	# rebar	DRILL HOLE DIA. (in.)	EMBEDMENT DEPTH IN INCHES														
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
3/8	#3	7/16	304.5	152.2	101.5	76.1	60.9	50.7	43.5	38.1	33.8	30.4	27.7	25.4	23.4	21.7	20.3
1/2		9/16	184.2	92.1	61.4	46.0	36.8	30.7	26.3	23.0	20.5	18.4	16.7	15.3	14.2	13.2	12.3
	#4	5/8	149.2	74.6	49.7	37.3	29.8	24.9	21.3	18.6	16.6	14.9	13.6	12.4	11.5	10.7	9.9
5/8	#5	3/4	103.6	51.8	34.5	25.9	20.7	17.3	14.8	12.9	11.5	10.4	9.4	8.6	8.0	7.4	6.9
3/4	#6	7/8	76.1	38.1	25.4	19.0	15.2	12.7	10.9	9.5	8.5	7.6	6.9	6.3	5.9	5.4	5.1
7/8	#7	1	58.3	29.1	19.4	14.6	11.7	9.7	8.3	7.3	6.5	5.8	5.3	4.9	4.5	4.2	3.9
1	#8	1-1/8	46.0	23.0	15.3	11.5	9.2	7.7	6.6	5.8	5.1	4.6	4.2	3.8	3.5	3.3	3.1
	#9	1-1/4	37.3	18.6	12.4	9.3	7.5	6.2	5.3	4.7	4.1	3.7	3.4	3.1	2.9	2.7	2.5
1-1/4		1-3/8	30.8	15.4	10.3	7.7	6.2	5.1	4.4	3.9	3.4	3.1	2.8	2.6	2.4	2.2	2.1
	#10	1-1/2	25.9	12.9	8.6	6.5	5.2	4.3	3.7	3.2	2.9	2.6	2.4	2.2	2.0	1.8	1.7
1-1/2"		1-5/8"	22.1	11.0	7.4	5.5	4.4	3.7	3.2	2.8	2.5	2.2	2.0	1.8	1.7	1.6	1.5
	#11	1-3/4	19.0	9.5	6.3	4.8	3.8	3.2	2.7	2.4	2.1	1.9	1.7	1.6	1.5	1.4	1.3

*The estimated number of anchoring installations per cartridge is based upon calculations of filling the hole 60% full of adhesive per the recommendation in our installation instructions. Hole volumes are calculated using ANSI tolerance carbide tipped drill bits. These estimates do not account for any waste.

G5P-30.4 fl. oz. Ordering Information

PART NUMBER	DESCRIPTION	BOX QTY	PART NUMBER	DESCRIPTION	BOX QTY
 G5P-30	30.4 Fluid Ounce Red Head G5+ Cartridge with S55 Nozzle	4	 D202	Pneumatic Dispenser for C6P-30 and G5P-30 cartridges	1
 D102	Heavy-Duty 34:1 thrust ratio hand dispenser for C6P-30 and G5P-30 cartridges	1	 A300	Cordless Battery Dispenser for A7P-28, C6P-30 and G5P-30 Cartridge. Includes one battery and charger. Works with all Milwaukee® M18™ batteries	1
 S55	Standard Mixing Nozzle, fits holes for 3/8" diameter anchors and larger. 3-1/2" inch usable length for 3/8" and 1/2" anchors, 8-1/4" usable length for 5/8" anchors and above	24	 S75	High Flow Mixing Nozzle, fits holes for 3/4" diameter anchors and larger. 7-3/8" usable length	24
 E55	Long Mixing Nozzle, fits holes for 3/8" diameter anchors and larger. 5-3/4" inch usable length for 3/8" and 1/2" anchors, 12-5/8" usable length for 5/8" anchors and above	24	 S75EXT	Extension for High Flow Mixing Nozzle for 3/4" diameter anchors and larger. 15-5/8" usable length when attached to S75	24

*See page 65 for nozzle extension tubes and other accessories

ESTIMATING TABLES

G5P-30

30.4 Fluid Ounce Cartridge

Number of Anchoring Installations Per Cartridge*
using Threaded Rod or Rebar with G5+ in Solid Concrete

ANCHOR DIA.		DRILL HOLE DIA. (in.)	EMBEDMENT DEPTH IN INCHES														
in.	# rebar		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
3/8	#3	7/16	608.9	304.5	203.0	152.2	121.8	101.5	87.0	76.1	67.7	60.9	55.4	50.7	46.8	43.5	40.6
1/2		9/16	368.3	184.2	122.8	92.1	73.7	61.4	52.6	46.0	40.9	36.8	33.5	30.7	28.3	26.3	24.6
	#4	5/8	298.4	149.2	99.5	74.6	59.7	49.7	42.6	37.3	33.2	29.8	27.1	24.9	23.0	21.3	19.9
5/8	#5	3/4	207.2	103.6	69.1	51.8	41.4	34.5	29.6	25.9	23.0	20.7	18.8	17.3	15.9	14.8	13.8
3/4	#6	7/8	152.2	76.1	50.7	38.1	30.4	25.4	21.7	19.0	16.9	15.2	13.8	12.7	11.7	10.9	10.1
7/8	#7	1	116.5	58.3	38.8	29.1	23.3	19.4	16.6	14.6	12.9	11.7	10.6	9.7	9.0	8.3	7.8
1	#8	1-1/8	92.1	46.0	30.7	23.0	18.4	15.3	13.2	11.5	10.2	9.2	8.4	7.7	7.1	6.6	6.1
	#9	1-1/4	74.6	37.3	24.9	18.6	14.9	12.4	10.7	9.3	8.3	7.5	6.8	6.2	5.7	5.3	5.0
1-1/4		1-3/8	61.6	30.8	20.5	15.4	12.3	10.3	8.8	7.7	6.8	6.2	5.6	5.1	4.7	4.4	4.1
	#10	1-1/2	51.8	25.9	17.3	12.9	10.4	8.6	7.4	6.5	5.8	5.2	4.7	4.3	4.0	3.7	3.5
1-1/2"		1-5/8"	44.1	22.1	14.7	11.0	8.8	7.4	6.3	5.5	4.9	4.4	4.0	3.7	3.4	3.2	2.9
	#11	1-3/4	38.1	19.0	12.7	9.5	7.6	6.3	5.4	4.8	4.2	3.8	3.5	3.2	2.9	2.7	2.5

*The estimated number of anchoring installations per cartridge is based upon calculations of filling the hole 60% full of adhesive per the recommendation in our installation instructions. Hole volumes are calculated using ANSI tolerance carbide tipped drill bits. These estimates do not account for any waste.



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



PERFORMANCE TABLE

G5+
Everyday Epoxy

Threaded Rod Ultimate Tension and Shear Loads^{1,2,3}
Installed in Solid Concrete

THREADED ROD DIAM. (in.)	EMBEDMENT IN CONCRETE (in.)	MAX. CLAMPING FORCE AFTER PROPER CURE ft./lbs.	ULTIMATE TENSION (lbs.)			ULTIMATE SHEAR (lbs.) 3,000 PSI CONCRETE & HIGHER
			3,000 PSI CONCRETE	5,000 PSI CONCRETE	7,000 PSI CONCRETE	
3/8	1-1/2	9	2,685	2,980	3,275	N/A
	3-3/8		9,890	10,385	10,800	4,420
1/2	2	16	5,160	5,835	6,535	N/A
	4-1/2		17,600	20,245	23,075	9,705
5/8	2-1/2	47	7,280	8,450	9,630	N/A
	5-5/8		22,910	26,575	30,295	16,470
3/4	3	70	10,225	11,450	12,710	N/A
	6-3/4		32,980	37,925	42,855	23,145
7/8	3-1/2	90	12,750	14,665	16,570	N/A
	7-7/8		48,350	58,020	70,200	27,300
1	4	110	15,070	17,335	19,585	N/A
	9		54,780	65,185	75,615	34,665
1-1/4	5	370	31,225	33,095	34,750	N/A
	11-1/4		73,920	86,490	98,600	58,570
1-1/2	13	450	85,920	100,095	114,275	N/A

1 Allowable working loads for the single installations under static loading should not exceed 25% capacity of the Ultimate Load. To calculate the Allowable Load of the anchor, divide the ultimate load by 4.

2 Performance values are based on the use of high strength threaded rod (ASTM A193 Gr. B7). The use of lower strength rods will result in lower ultimate tension and shear loads.

3 Linear interpolation may be used for intermediate spacing and edge distances.

PERFORMANCE TABLE

G5+
Everyday Epoxy

Threaded Rod Allowable Tension Loads¹
Installed in Solid Concrete

THREADED ROD DIA (in.)	EMBEDMENT IN CONCRETE (in.)	ALLOWABLE TENSION LOAD BASED ON CONCRETE STRENGTH (lbs.)			ALLOWABLE TENSION LOAD BASED ON STEEL STRENGTH (lbs.)		
		3,000 psi concrete	5,000 psi concrete	7,000 psi concrete	ASTM A307	ASTM A193 GRADE B7	ASTM F593 AISI 304 SS
3/8	1-1/2	670	745	815	2,080	4,340	3,995
	3-3/8	2,470	2,595	2,700	2,080	4,340	3,995
1/2	2	1,290	1,455	1,630	3,730	7,780	7,155
	4-1/2	4,400	5,060	5,765	3,730	7,780	7,155
5/8	2-1/2	1,820	2,110	2,405	5,870	12,230	11,250
	5-5/8	5,725	6,640	7,570	5,870	12,230	11,250
3/4	3	2,555	2,860	3,175	8,490	17,690	14,860
	6-3/4	8,245	9,480	10,710	8,490	17,690	14,860
7/8	3-1/2	3,185	3,665	4,140	11,600	25,510	20,835
	7-7/8	12,085	14,505	17,550	11,600	25,510	20,835
1	4	3,765	4,330	4,895	15,180	31,620	26,560
	9	13,695	16,295	18,900	15,180	31,620	26,560
1-1/4	5	7,805	8,270	8,685	23,800	49,580	34,670
	11-1/4	18,480	21,620	24,650	23,800	49,580	34,670
1-1/2	13	21,480	25,025	28,570	33,720	70,250	47,770

1. Use lower value of either bond or steel strength for allowable tension load.

PERFORMANCE TABLE

G5+

Everyday Epoxy

Threaded Rod Allowable Shear Loads¹
Installed in Solid Concrete

THREADED ROD DIA. (in.)	EMBEDMENT IN CONCRETE (in.)	ALLOWABLE SHEAR LOAD BASED ON CONCRETE STRENGTH (lbs.)	ALLOWABLE SHEAR LOAD BASED ON STEEL STRENGTH (lbs.)		
		3,000 psi concrete & higher	ASTM A307	ASTM A193 GRADE B7	ASTM F593 AISI 304 SS
3/8	1-1/2	N/A	1,040	2,170	1,995
	3-3/8	1,105	1,040	2,170	1,995
1/2	2	N/A	1,870	3,895	3,585
	4-1/2	2,455	1,870	3,895	3,585
5/8	2-1/2	N/A	2,940	6,125	5,635
	5-5/8	4,115	2,940	6,125	5,635
3/4	3	N/A	4,250	8,855	7,440
	6-3/4	5,915	4,250	8,855	7,440
7/8	3-1/2	N/A	5,800	12,760	10,730
	7-7/8	7,065	5,800	12,760	10,730
1	4	N/A	7,590	15,810	13,285
	9	8,570	7,590	15,810	13,285
1-1/4	5	N/A	11,900	24,790	18,840
	11-1/4	14,805	11,900	24,790	18,840

¹ Use lower value of either concrete or steel strength for allowable shear

PERFORMANCE TABLE

G5+

Everyday Epoxy

Rebar Allowable Tension Loads^{1,2,3}
Installed in Solid Concrete

REINFORCING BAR	EMBEDMENT IN CONCRETE (in.)	ULTIMATE TENSION (lbs.)			ULTIMATE YIELD STRENGTH GRADE 60 REBAR (lbs.)	ULTIMATE TENSILE STRENGTH GRADE 60 REBAR (lbs.)
		3,000 psi concrete	5,000 psi concrete	7,000 psi concrete		
#3	1-1/2	2,685	3,165	3,640	6,600	9,900
	3-3/8	9,960	10,460	10,950		
#4	2	5,465	4,770	5,365	12,000	18,000
	4-1/2	17,600	20,420	23,075		
#5	2-1/2	7,710	9,020	10,240	18,600	27,900
	5-5/8	20,295	23,745	27,070		
#6	3	10,825	12,230	13,455	26,400	39,600
	6-3/4	32,980	38,405	43,855		
#7	3-1/2	13,800	15,875	18,015	36,000	54,000
	7-7/8	51,125	63,090	76,140		
#8	4	17,535	20,170	22,830	47,400	71,100
	9	61,565	73,100	85,015		
#10	5	29,835	31,295	33,205	79,200	114,300
	11-1/4	67,695	79,340	89,655		
#11	13	85,920	100,095	114,275	93,600	140,400

¹ Allowable working loads for the single installations under static loading should not exceed 25% capacity of the ultimate load (to get the allowable load of the anchor rod, divide the ultimate load by 4).

² Performance values are based on the use of ASTM A615 Grade 60 reinforcing bar. The use of lower strength rebar will result in lower ultimate tension loads

³ SHEAR DATA: Provided the distance from the rebar to the edge of the concrete member exceeds 1.25 times the embedment depth of the rebar, calculate the ultimate shear load for the rebar anchorage as 60% of the ultimate tensile strength of the rebar.

PERFORMANCE REFERENCE TABLE

G5+

Everyday Epoxy

Threaded Rod and Rebar Installation in Solid Concrete
Edge/Spacing Distance Load Factor Summary^{1,2}

LOAD FACTOR	DISTANCE FROM EDGE OF CONCRETE	LOAD FACTOR	DISTANCE FROM ANOTHER ANCHOR
Critical Edge Distance—Tension		Critical Spacing—Tension	
100% Tension Load	→ 1.25 x Anchor Embedment (or greater)	100% Tension Load	→ 1.50 x Anchor Embedment (or greater)
Minimum Edge Distance—Tension		Minimum Spacing—Tension	
70% Tension Load	→ 0.50 x Anchor Embedment	75% Tension Load	→ 0.75 x Anchor Embedment
Critical Edge Distance—Shear		Critical Spacing—Shear	
100% Shear Load	→ 1.25 x Anchor Embedment (or greater)	100% Shear Load	→ 1.50 x Anchor Embedment (or greater)
Minimum Edge Distance—Shear		Minimum Spacing—Shear	
30% Shear Load	→ 0.30 x Anchor Embedment	30% Shear Load	→ 0.50 x Anchor Embedment

¹ Use linear interpolation for load factors at edge distances or spacing distances between critical and minimum.

² Anchors are affected by multiple combination of spacing and/or edge distance loading and direction of the loading. Use the product of tension and shear loading factors in design.



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



STRENGTH DESIGN TABLE

G5+
Everyday Epoxy

**Threaded Rod Tension (lbf) and Shear (lbf) Loads
in Uncracked Concrete^{1,2,3,4} ASTM A193 B7**

ANCHOR DIAMETER (in.)	EMBEDMENT DEPTH (in.)	TENSION (lbf)						SHEAR (lbf)
		2500 psi	3000 psi	4000 psi	5000 psi	6000 psi	7000-8000 psi	2500-8000 psi
3/8	3-3/8	3,910	3,910	3,910	3,910	3,910	3,910	3,775
	4-1/2	5,215	5,215	5,215	5,215	5,215	5,215	3,775
	7-1/2	7,265	7,265	7,265	7,265	7,265	7,265	3,775
1/2	4-1/2	6,705	6,705	6,705	6,705	6,705	6,705	6,915
	6	8,940	8,940	8,940	8,940	8,940	8,940	6,915
	10	13,305	13,305	13,305	13,305	13,305	13,305	6,915
5/8	5-5/8	10,080	10,080	10,080	10,080	10,080	10,080	11,015
	7-1/2	13,445	13,445	13,445	13,445	13,445	13,445	11,015
	12-1/2	21,185	21,185	21,185	21,185	21,185	21,185	11,015
3/4	6-3/4	13,675	13,950	13,950	13,950	13,950	13,950	16,305
	9	18,600	18,600	18,600	18,600	18,600	18,600	16,305
	15	31,000	31,000	31,000	31,000	31,000	31,000	16,305
7/8	7-7/8	17,235	18,275	18,275	18,275	18,275	18,275	22,505
	10-1/2	24,365	24,365	24,365	24,365	24,365	24,365	22,505
	17-1/2	40,610	40,610	40,610	40,610	40,610	40,610	22,505
1	9	21,060	22,935	22,935	22,935	22,935	22,935	29,525
	12	30,580	30,580	30,580	30,580	30,580	30,580	29,525
	20	50,970	50,970	50,970	50,970	50,970	50,970	29,525
1-1/4	11-1/4	29,430	32,240	35,475	35,475	35,475	35,475	47,240
	15	45,310	47,300	47,300	47,300	47,300	47,300	47,240
	25	78,830	78,830	78,830	78,830	78,830	78,830	47,240

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths are for dry, uncracked concrete with periodic inspection

4 Bond strengths are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).

STRENGTH DESIGN TABLE

G5+
Everyday Epoxy

**Threaded Rod Tension (lbf) and Shear (lbf) Loads
in 4,000 psi Uncracked Concrete^{1,2,3,4}**

ANCHOR DIAMETER (in.)	EMBEDMENT DEPTH (in.)	ASTM A193 B7 THREAD ROD		CARBON STEEL A36		STAINLESS STEEL F593	
		TENSION (lbf)	SHEAR (lbf)	TENSION (lbf)	SHEAR (lbf)	TENSION (lbf)	SHEAR (lbf)
3/8	3-3/8	3,910	3,777	3,375	1,755	3,910	2,280
	4-1/2	5,215	3,777	3,375	1,755	4,785	2,280
	7-1/2	7,265	3,777	3,375	1,755	4,785	2,280
1/2	4-1/2	6,705	6,916	6,170	3,210	6,705	4,040
	6	8,940	6,916	6,170	3,210	8,760	4,040
	10	13,305	6,916	6,170	3,210	8,760	4,040
5/8	5-5/8	10,080	11,018	9,830	5,115	10,080	6,440
	7-1/2	13,445	11,018	9,830	5,115	13,445	6,440
	12-1/2	21,185	11,018	9,830	5,115	13,955	6,440
3/4	6-3/4	13,950	16,309	13,950	7,565	13,950	7,610
	9	18,600	16,309	14,550	7,565	16,500	7,610
	15	31,000	16,309	14,550	7,565	16,500	7,610
7/8	7-7/8	18,275	22,510	18,275	10,445	18,275	10,530
	10-1/2	24,365	22,510	20,085	10,445	22,820	10,530
	17-1/2	40,610	22,510	20,085	10,445	22,820	10,530
1	9	22,935	29,530	22,935	13,700	22,935	13,815
	12	30,580	29,530	26,345	13,700	29,935	13,815
	20	50,970	29,530	26,345	13,700	29,935	13,815
1-1/4	11-1/4	35,475	47,242	35,475	21,920	35,475	22,090
	15	47,300	47,242	42,155	21,920	47,300	22,090
	25	78,830	47,242	42,155	21,920	47,865	22,090

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths are for dry, uncracked concrete with periodic inspection

4 Bond strengths are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).

STRENGTH DESIGN TABLE

G5+

Everyday Epoxy

**Threaded Rod Tension (lbf) and Shear (lbf) Loads
in Cracked Concrete^{1,2,3,4} ASTM A193 B7**

ANCHOR DIAMETER (in.)	EMBEDMENT DEPTH (in.)	TENSION (lbf)						SHEAR (lbf)
		2500 psi	3000 psi	4000 psi	5000 psi	6000 psi	7000-8000 psi	2500-8000 psi
3/8	3-3/8	1,865	1,865	1,865	1,865	1,865	1,865	2,615
	4-1/2	2,490	2,490	2,490	2,490	2,490	2,490	3,490
	7-1/2	4,155	4,155	4,155	4,155	4,155	4,155	3,775
1/2	4-1/2	3,185	3,185	3,185	3,185	3,185	3,185	4,460
	6	4,250	4,250	4,250	4,250	4,250	4,250	5,950
	10	7,080	7,080	7,080	7,080	7,080	7,080	6,915
5/8	5-5/8	4,765	4,765	4,765	4,765	4,765	4,765	6,675
	7-1/2	6,355	6,355	6,355	6,355	6,355	6,355	8,900
	12-1/2	10,595	10,595	10,595	10,595	10,595	10,595	11,015
3/4	6-3/4	6,645	6,645	6,645	6,645	6,645	6,645	9,305
	9	8,860	8,860	8,860	8,860	8,860	8,860	12,405
	15	14,770	14,770	14,770	14,770	14,770	14,770	16,305
7/8	7-7/8	8,750	8,750	8,750	8,750	8,750	8,750	12,250
	10-1/2	11,665	11,665	11,665	11,665	11,665	11,665	16,335
	17-1/2	19,445	19,445	19,445	19,445	19,445	19,445	22,505
1	9	11,040	11,040	11,040	11,040	11,040	11,040	15,455
	12	14,720	14,720	14,720	14,720	14,720	14,720	20,610
	20	24,535	24,535	24,535	24,535	24,535	24,535	29,525
1-1/4	11-1/4	16,520	16,520	16,520	16,520	16,520	16,520	23,130
	15	22,030	22,030	22,030	22,030	22,030	22,030	30,840
	25	36,715	36,715	36,715	36,715	36,715	36,715	47,240

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths are for dry, cracked concrete with periodic inspection

4 Bond strengths are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).

STRENGTH DESIGN TABLE

G5+

Everyday Epoxy

**Threaded Rod Tension (lbf) and Shear (lbf) Loads
in 4,000 psi Cracked Concrete^{1,2,3,4}**

ANCHOR DIAMETER (in.)	EMBEDMENT DEPTH (in.)	ASTM A193 B7 THREAD ROD		STAINLESS STEEL F593		CARBON STEEL A36	
		TENSION (lbf)	SHEAR (lbf)	TENSION (lbf)	SHEAR (lbf)	TENSION (lbf)	SHEAR (lbf)
3/8	3-3/8	1,865	2,615	1,865	1,755	1,865	2,280
	4-1/2	2,490	3,490	2,490	1,755	2,490	2,280
	7-1/2	4,155	3,775	3,375	1,755	4,155	2,280
1/2	4-1/2	3,185	4,460	3,185	3,210	3,185	4,040
	6	4,250	5,950	4,250	3,210	4,250	4,040
	10	7,080	6,915	6,170	3,210	7,080	4,040
5/8	5-5/8	4,765	6,675	4,765	5,115	4,765	6,440
	7-1/2	6,355	8,900	6,355	5,115	6,355	6,440
	12-1/2	10,595	11,015	9,830	5,115	10,595	6,440
3/4	6-3/4	6,645	9,305	6,645	7,565	6,645	7,610
	9	8,860	12,405	8,860	7,565	8,860	7,610
	15	14,770	16,305	14,550	7,565	14,770	7,610
7/8	7-7/8	8,750	12,250	8,750	10,445	8,750	10,530
	10-1/2	11,665	16,335	11,665	10,445	11,665	10,530
	17-1/2	19,445	22,505	19,445	10,445	19,445	10,530
1	9	11,040	15,455	11,040	13,700	11,040	13,815
	12	14,720	20,610	14,720	13,700	14,720	13,815
	20	24,535	29,525	24,535	13,700	24,535	13,815
1-1/4	11-1/4	16,520	23,130	16,520	21,920	16,520	22,090
	15	22,030	30,840	22,030	21,920	22,030	22,090
	25	36,715	47,240	36,715	21,920	36,715	22,090

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths are for dry, cracked concrete with periodic inspection

4 Bond strengths are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



STRENGTH DESIGN TABLE

G5+
Everyday Epoxy

**Rebar Tension (lbf) and Shear (lbf) Loads
in Uncracked Concrete^{1,2,3,4} ASTM A615 Grade 60**

ANCHOR DIAMETER # Rebar	EMBEDMENT DEPTH (in.)	TENSION (lbf)						SHEAR (lbf)
		2500 psi	3000 psi	4000 psi	5000 psi	6000 psi	7000-8000 psi	2500-8000 psi
#3	3-3/8	3,910	3,910	3,910	3,910	3,910	3,910	3,560
	4-1/2	5,215	5,215	5,215	5,215	5,215	5,215	3,560
	7-1/2	4,835	6,435	6,435	6,435	6,435	6,435	3,560
#4	4-1/2	6,705	6,705	6,705	6,705	6,705	6,705	6,480
	6	8,940	8,940	8,940	8,940	8,940	8,940	6,480
	10	11,700	11,700	11,700	11,700	11,700	11,700	6,480
#5	5-5/8	10,080	10,080	10,080	10,080	10,080	10,080	10,040
	7-1/2	13,445	13,445	13,445	13,445	13,445	13,445	10,040
	12-1/2	18,135	18,135	18,135	18,135	18,135	18,135	10,040
#6	6-3/4	13,675	13,950	13,950	13,950	13,950	13,950	14,255
	9	18,600	18,600	18,600	18,600	18,600	18,600	14,255
	15	25,740	25,740	25,740	25,740	25,740	25,740	14,255
#7	7-7/8	17,235	18,275	18,275	18,275	18,275	18,275	19,440
	10-1/2	24,365	24,365	24,365	24,365	24,365	24,365	19,440
	17-1/2	35,100	35,100	35,100	35,100	35,100	35,100	19,440
#8	9	21,060	22,935	22,935	22,935	22,935	22,935	25,595
	12	30,580	30,580	30,580	30,580	30,580	30,580	25,595
	20	46,215	46,215	46,215	46,215	46,215	46,215	25,595
#9	10-1/8	25,130	27,525	29,030	29,030	29,030	29,030	32,400
	13-1/2	38,690	38,705	38,705	38,705	38,705	38,705	32,400
	22-1/2	58,500	58,500	58,500	58,500	58,500	58,500	32,400
#10	11-1/4	29,430	32,240	35,475	35,475	35,475	35,475	41,145
	15	45,310	47,300	47,300	47,300	47,300	47,300	41,145
	25	74,295	74,295	74,295	74,295	74,295	74,295	41,145

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.itwredhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths are for dry, uncracked concrete with periodic inspection

4 Bond strengths are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).

STRENGTH DESIGN TABLE

G5+

Everyday Epoxy

**Rebar Tension (lbf) and Shear (lbf) Loads
in Cracked Concrete^{1,2,3,4} ASTM A615 Grade 60**

ANCHOR DIAMETER # Rebar	EMBEDMENT DEPTH (in.)	TENSION (lbf)					SHEAR (lbf)
		2500 psi	3000 psi	4000 psi	5000 psi	6000-8000 psi	2500-8000 psi
#3	3-3/8	1,865	1,865	1,865	1,865	1,865	2,615
	4-1/2	2,490	2,490	2,490	2,490	2,490	3,490
	7-1/2	4,155	4,155	4,155	4,155	4,155	3,560
#4	4-1/2	3,185	3,185	3,185	3,185	3,185	4,460
	6	4,250	4,250	4,250	4,250	4,250	5,950
	10	7,080	7,080	7,080	7,080	7,080	6,480
#5	5-5/8	4,765	4,765	4,765	4,765	4,765	6,675
	7-1/2	6,355	6,355	6,355	6,355	6,355	8,900
	12-1/2	10,595	10,595	10,595	10,595	10,595	10,040
#6	6-3/4	6,645	6,645	6,645	6,645	6,645	9,305
	9	8,860	8,860	8,860	8,860	8,860	12,405
	15	14,770	14,770	14,770	14,770	14,770	14,255
#7	7-7/8	8,750	8,750	8,750	8,750	8,750	12,250
	10-1/2	11,665	11,665	11,665	11,665	11,665	16,335
	17-1/2	19,445	19,445	19,445	19,445	19,445	19,440
#8	9	11,040	11,040	11,040	11,040	11,040	15,455
	12	14,720	14,720	14,720	14,720	14,720	20,610
	20	24,535	24,535	24,535	24,535	24,535	25,595
#9	10-1/8	13,970	13,970	13,970	13,970	13,970	19,560
	13-1/2	18,630	18,630	18,630	18,630	18,630	26,080
	22-1/2	31,050	31,050	31,050	31,050	31,050	32,400
#10	11-1/4	16,520	16,520	16,520	16,520	16,520	23,130
	15	22,030	22,030	22,030	22,030	22,030	30,840
	25	36,715	36,715	36,715	36,715	36,715	41,145

1 Tabulated values are for estimation purposes only and should not be used for design (please use our free TruSpec anchorage design software at www.ITW-redhead.com)

2 Tabulated values represent strength design per ACI 318 for a single anchor in adequate concrete thickness, not near an edge nor adjacent anchorage, and not for sustained loading.

3 Bond strengths are for dry, cracked concrete with periodic inspection

4 Bond strengths are for Temperature Range A (maximum long term temperature of 110F, maximum short term temperature of 142F).



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



Umbrella Inserts and Screen Tubes

**High Performance
Adhesive Systems
for Fastening to
Hollow Base Materials**



A7P-10

A7P-28



HB14-2

HBU-38

DESCRIPTION/ADVANTAGES

Hollow Block Fastening with A7+/C6+ G5+ Adhesive


HBU-38

Umbrella Inserts—specially designed for fastening to the face of hollow concrete block, brick, clay tile or terra cotta. Accepts rods 1/4", 3/8" and 1/2"

For umbrella to open correctly, air gap must be a minimum of 2-1/4"

SHORT SCREENS

Specially designed stainless steel screens provide maximum performance for a screen in the front face of hollow concrete block. Screens available for rods 1/4" to 5/8"

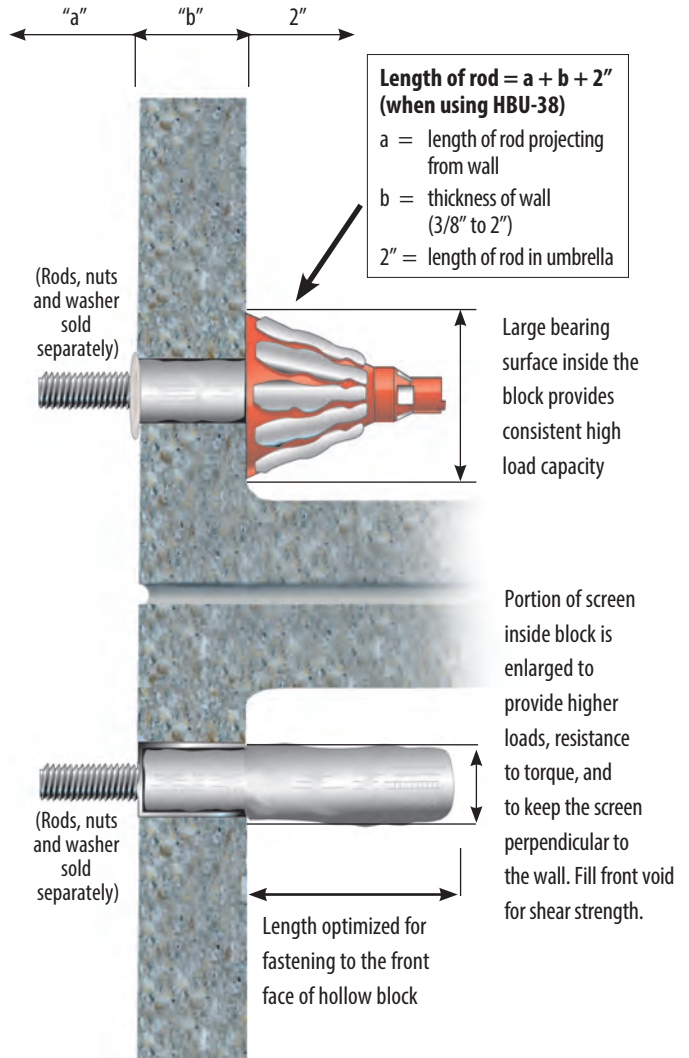


Section View—Concrete Block

COMBINE WITH A7+/C6+/G5+ TO CREATE AN ADHESIVE FASTENING SYSTEM IDEAL FOR HOLLOW BLOCK, TERRA COTTA, CLAY TILE, MASONRY AND MORE

- Accepts 1/4", 3/8, and 1/2" threaded rods
- Use with A7+ Acrylic adhesive for fast dispensing, fast curing installation
- Use with C6+ Epoxy for fast curing extended working time installation

Umbrella Inserts and Screens

INSTALLATION STEPS

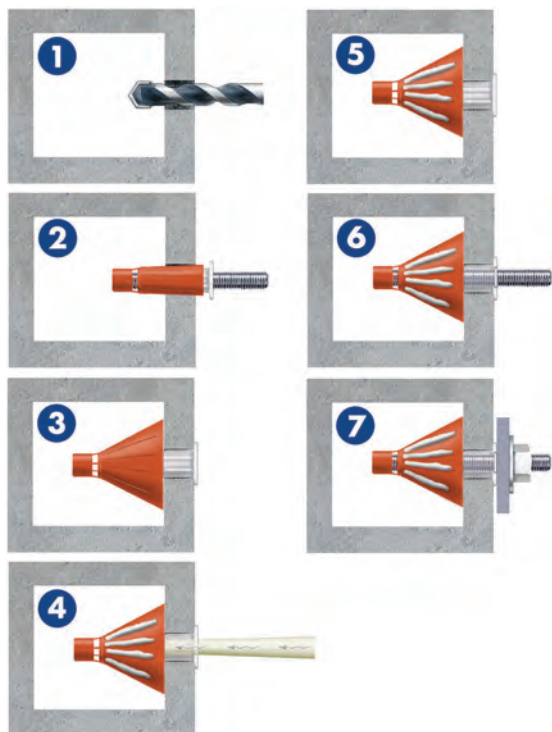

1. Drill 3/4" diameter hole, 3-3/4" deep using rotation only drilling mode and carbide tipped drill bit. Clean out hole with forced air. Complete hole preparation with use of a brush and repeat cleaning with compressed air (leave no dust or slurry).
2. Place umbrella on piece of threaded rod, stretch umbrella over the rod by pulling the white collar back approximately 1". Squeeze orange portion of umbrella and push umbrella into hole.
3. With the rod, push umbrella body through the hole and completely into void until umbrella opens behind wall. Remove threaded rod. (Do not use in solid base materials. For anchoring into block web, ends and mortar joints, use screens.)
4. Dispense and discard a sufficient amount of adhesive from new cartridge until a uniform adhesive mix is achieved. Inject approximately 1-1/2 fl. oz. of adhesive into umbrella (7 to 8 pumps using manual dispenser) to completely fill umbrella.
5. 3/8" rod uses a centering ring (supplied with inserts) to keep rod perpendicular to the wall.
6. Insert rod into the filled umbrella using a slow, soft twisting motion until it contacts the back of umbrella.
7. Wait for appropriate temperature/cure time before tightening fixture to the recommended torque of 10 ft./lbs.

Installation instructions for screens provided on page 63.

SELECTION CHART

Umbrella Inserts



DESCRIPTION	PART NO.	BOX CONTENTS
Umbrella Anchor 	HBU-38	20 Umbrellas 20 Centering Rings

SELECTION CHART

Short Screen Tubes



PART NO.	DESCRIPTION	QTY/BOX
HB14-2	1/4" x 2" Stainless Screen	100
HB38-312	3/8" x 3-1/2" Stainless Screen	100
HB12-312	1/2" x 3-1/2" Stainless Screen	50
HB58-412	5/8" x 4-1/2" Stainless Screen	50

ESTIMATING TABLE

Umbrella Inserts

Number of Anchoring Installations Per Cartridge* Using Threaded Rod and Umbrella Inserts with A7+ in Hollow Block

ROD in.	ROD (mm)	DRILL HOLE DIA. INCHES	VOLUME OF CARTRIDGE	UMBRELLA INSERT WITH EMBEDMENT OF 3-3/4"
3/8	(9.5)	3/4	A7+ 9.5 fluid oz.	6
			A7+ 28 fluid oz.	17

* These estimates do not account for waste.

ESTIMATING TABLE

Short Screens

Number of Anchoring Installations per Cartridge*
Threaded Rod using Short Screen Tubes in A7+ in Hollow Block

ROD		DRILL HOLE DIA. INCHES	VOLUME OF CARTRIDGE		SCREEN LENGTH PLUS 1 DIAMETER (inches)		
in.	(mm)				2"	3-1/2"	4-1/2"
1/4	(6.4)	3/8	A7+	9.5 fluid oz.	48		
			A7+	28 fluid oz.	135		
3/8	(9.5)	1/2	A7+	9.5 fluid oz.		21	
			A7+	28 fluid oz.		62	
1/2	(12.7)	5/8	A7+	9.5 fluid oz.		15	
			A7+	28 fluid oz.		43	
5/8	(15.9)	3/4	A7+	9.5 fluid oz.			11
			A7+	28 fluid oz.			24

*These estimates do not account for waste

PERFORMANCE TABLE

Load Values^{1,2}

**Hollow Concrete Block: Ultimate Tension and Shear Loads
using Umbrellas and Short Screen Tubes^{1,2}**

	ROD DIA.		MAX CLAMPING FORCE AFTER PROPER CURE		DRILL HOLE DIA.		EMBEDMENT (SCREEN LENGTH)		ULTIMATE TENSION		ULTIMATE SHEAR	
	in.	(mm)	ft. lbs.	(Nm)	in.	(mm)	in.	(mm)	lbs.	(Kn)	lbs.	(Kn)
Umbrella	3/8	(9.5)	10	(13)	3/4	(19.1)	3-3/4	(95.3)	3,600	(16)	3,200	(14.2)
	1/2"	(12.7)	10	(13)	3/4	(19.1)	3-3/4	(95.3)	3,600	(16)	3,200	(14.2)
Short Screen Tubes	1/4	(6.4)	4	(5)	3/8	(9.5)	2 - 1/4	(57.1)	1,550	(6.9)	1,900	(8.5)
	3/8	(9.5)	7	(9)	1/2	(12.7)	3-7/8	(98.4)	1,661	(7.4)	2,071	(9.2)
	1/2	(12.7)	10	(13)	5/8	(15.9)	4	(101.6)	2,458	(10.9)	4,467	(19.9)
	5/8	(15.9)	13	(17)	3/4	(19.1)	5-1/8	(130.2)	2,543	(10.9)	5,047	(22.4)

1 Allowable working loads should not exceed 20% ultimate capacity. Based upon testing using ASTM A193, Grade B7 rod. Divide by 5.

2 The tabulated values are for anchors installed at a minimum 12 inch edge distance and minimum 8 inch spacing.

Screen Tubes


**Quality Adhesive
Systems for
Fastening Through
Block and for
Brick Pinning
Applications**



A7P-10

A7P-28

Screen
Tubes

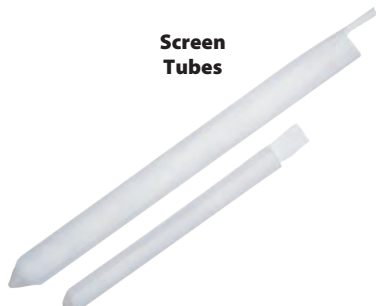


DESCRIPTION/SUGGESTED SPECIFICATIONS

Screens Tubes Used with A7+/C6+ /G5+

HOLLOW CONCRETE BLOCK

Maximum holding strength in concrete block can be obtained by fastening to both the front and back of the block using an adhesive screen tube and threaded rod.


For attachment of screens to front face of a block, see Installation Steps below



Top View

BRICK WALL

Systems designed for Seismic Retrofit, Brick Pinning or fastening to brick—various lengths and diameters available to accommodate site conditions.



Section

The no-drip feature of A7+ adhesive makes it particularly well suited for brick pinning applications.

ADVANTAGES


HBP SERIES—NYLON SCREENS

- 30%-50% savings from stainless steel screens
- Comparable performance values
- Easier to insert and span across voids
- Flexible material is less susceptible to damage from crushing

HB SERIES—STAINLESS SCREENS

- Corrosion resistant
- Available in 1/4" to 3/4" diameters
- Special version, "dosage control" available for overhead and underwater installations

INSTALLATION STEPS




Hollow Base
Material Screens


1. Drill hole to the length of the screen plus 1 diameter, using rotation-only drilling mode. Clean out hole with forced air. Complete hole preparation with use of a brush and repeat cleaning with forced air (leave no dust or slurry).



3. Insert the filled screen completely into the hole (subflush).



2. When starting new cartridge or new nozzle, dispense and discard enough adhesive until uniform adhesive mix is achieved. Insert the nozzle into the bottom of the screen and fill screen completely full (use extension tube if needed to reach bottom of screen).



4. While holding the tab of the screen against the wall, hand insert the selected rod slowly into the screen tube with a slow twisting motion. Pull screen flush to face and coat with adhesive. Wait for appropriate cure time before torquing fixture in place.

SELECTION CHART

Screen Tubes

HB Stainless Screen

HBP Nylon Screen

ROD DIA.		SCREEN LENGTH		STAINLESS STEEL SCREENS		NYLON SCREENS	
in.	(mm)	in.	(mm)	PART NO.	QTY/BOX	PART NO.	QTY/BOX
1/4	(6.4)	6	(152.4)	HB14-6	100		
1/4	(6.4)	8	(203.2)	HB14-8	100		
1/4	(6.4)	10	(254.0)	HB14-10	100		
3/8	(9.5)	6	(152.4)			HBP38-6	50
3/8	(9.5)	8	(203.2)			HBP38-8	25
3/8	(9.5)	10	(254.0)			HBP38-10	25
1/2	(12.7)	6	(152.4)			HBP12-6	50
1/2	(12.7)	8	(203.2)			HBP12-8	25
1/2	(12.7)	10	(254.0)			HBP12-10	25
5/8	(15.9)	6	(152.4)			HBP58-6	40
5/8	(15.9)	8	(203.2)			HBP58-8	40
5/8	(15.9)	10	(254.0)			HBP58-10	40
3/4	(19.1)	8	(203.2)	HB34-8	20		
3/4	(19.1)	10	(254.0)			HBP34-10	20
3/4	(19.1)	13	(330.2)			HBP34-13	20

*Not available in standard strength nylon screens.

ESTIMATING TABLE

Screen Tubes

Number of Holes per Cartridge* using Threaded Rod and Screen Tubes with A7+ in Hollow Base Materials


ROD		DRILL HOLE DIA. INCHES	VOLUME OF CARTRIDGE		SCREEN LENGTH			
in.	(mm)				6"	8"	10"	13"
1/4	(6.4)	3/8	A7	9.5 fluid oz.	16	12	10	
			A7	28 fluid oz.	45	35	28	
3/8	(9.5)	1/2	A7	9.5 fluid oz.	12	10	7.5	
			A7	28 fluid oz.	37	29	23	
1/2	(12.7)	5/8	A7	9.5 fluid oz.	9	6	5	
			A7	28 fluid oz.	26	18	14	
5/8	(15.9)	3/4	A7	9.5 fluid oz.	6	5	4	
			A7	28 fluid oz.	18	14	10	
3/4	(19.1)	7/8	A7	9.5 fluid oz.		3	2.5	1.75
			A7	28 fluid oz.		9	6	5

* These estimates do not account for waste.

Accessories



Wire Brush Extensions

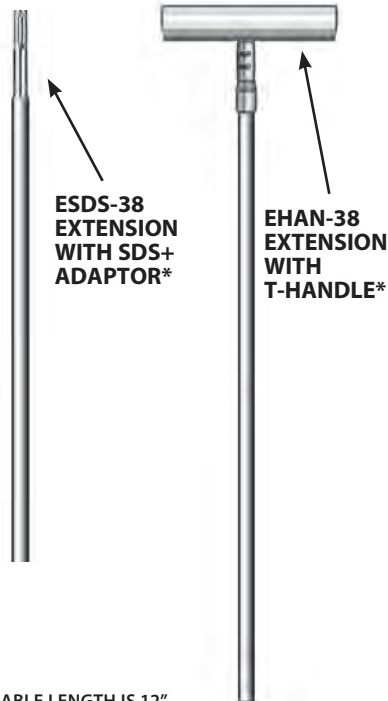

* USABLE LENGTH IS 12",
GOOD FOR ALL HOLES EXCEPT 7/16" DIAMETER

DESCRIPTION/ADVANTAGES

Hole Plugs



Special plugs make overhead installations easier, centers rod in hole, and keeps adhesive off threads

ANCHOR DIAMETER	HOLE DIAMETER	PART NO.	QTY
3/8"	7/16"	E038	25
1/2"	9/16"	E012	25
5/8"	3/4"	E058	20
3/4"	7/8"	E034	20
7/8"	1"	E078	10
1"	1-1/8"	E010	10
1-1/4"	1-3/8"	E114	10

Piston Plugs



Use with E916-6
extension tube

HOLE PLUGS	PART NO.	HOLE DIAMETER	QTY
Piston Plug for 5/8" and 3/4" anchor diameter	PL-5834	3/4"	25
		7/8"	25
Piston Plug for 7/8" and 1" anchor diameter	PL-7810	1"	20
		1-1/8"	20
Piston Plug for 1-1/4" anchor diameter	PL-1250	1-3/8"	10
			10

Wire Brushes



1/8" NPT
(National Pipe
Thread Taper)

Proper hole cleaning using a brush is essential to achieve optimum performance

PART No.	ANCHOR DIA.	REBAR DIA.	HOLE DIA.	OVERALL LENGTH	BRUSH DIA.	QTY/ BAG
WB-038	3/8"	No. 3	7/16"	4-7/8"	5/8"	10
WB-012	1/2"	No. 4	5/8"	4-7/8"	3/4"	10
WB-058	5/8"	No. 5	3/4"	4-7/8"	1"	10
WB-034	3/4"	No. 6	7/8"	4-7/8"	1-1/4"	10
WB-078	7/8"	No. 7	1"	5-1/8"	1-1/2"	10
WB-100	1"	No. 8	1-1/8"	5-1/4"	1-5/8"	10
WB-125	1-1/4"	No. 10	1-3/8"	5-1/4"	1-3/4"	10
ESDS-38	Wire brush 12" usable extension with SDS+ adaptor					1
EHAN-38	Wire brush 12" usable extension with T-Handle					1

* Proper hole cleaning using a wire brush is essential to achieve optimum performance.
Brush may be used up to 50 holes depending on concrete strength.
Brushes required for installation of No. 4, No. 8 rebar and larger are available with lead time.

Plastic Extension Tubing



Attaches to Adhesive System nozzles for deep hole installations

DESCRIPTION	PART NO.	QTY
6-Foot Straight Tubing (.39 in. I.D. x .43 in. O.D.) (works with A245, S55, and E55 nozzle)	E25-6	6
6-Foot Long Extension Tube for use with Piston Plugs (works with all nozzles, use the S75 ext. to use with S75)	E916-6	5

Blow Pump



DESCRIPTION	PART NO.	QTY/BAG
Blow Pump	BP-10	1

Minimum hole 7/16".

Selection Guide – Anchors for Concrete Applications

ANCHOR TYPE

KEY FEATURES

SIZE RANGE (inches)



Trubolt® Wedge Anchors



ID STAMP




- 2018 IBC Compliant
- Seismic zone (A-B) approved
- Fully-threaded
- Length ID head stamped
- Stainless steel clip
- Through-fixture fastening

Diameter: 1/4 – 1
Length: 1-3/4 – 12



Large Diameter Tapcon (LDT)

Self-Threading Anchor




- Anti-rotation serrated washer
- Extra large hex washer head
- Length ID head stamped
- Through-fixture fastening

LDT with Zinc Plating
Diameter: 3/8 – 3/4
Length: 1-3/4 – 6-1/4



Multi-Set II® Drop-In Anchors



RM

RL

RX

CL

- RM: Flanged body to keep anchor flush with surface of concrete
- RL: Non-flanged body for recessed setting
- RX: Designed for hollow core and post tension concrete
- CL: Designed for one-sided forming, accepts coil rod

Diameter: 1/4 – 3/4
Length: 1 – 3-3/16

Diameter: 1/4 – 3/4
Length: 1 – 3-3/16

Diameter: 3/8 & 1/2
Length: 3/4 – 1

Diameter: 1/2 & 3/4
Length: 2 & 3-3/16

Dynabolt® Sleeve Anchors




For both Hollow and Solid Concrete Applications

- Concrete, block and brick
- Many choices of head styles
- Through-fixture fastening
- Available in 304 stainless steel


Diameter: 1/4 – 3/4
Length: 5/8 – 6-1/4




Tapcon® Concrete Anchors with Advanced Threadform Technology™



Original



Maxi-Set



SCOTS

XL

StormGuard

Selection Guide

	CORROSION RESISTANCE	PERFORMANCE	HEAD STYLES	APPROVALS/LISTINGS
Trubolt® Wedge cont'd	<ul style="list-style-type: none"> Zinc-plated carbon steel to ASTM B633, SC1, Type III Hot dipped galvanized to ASTM A-153 Type 304 and 316 stainless steel 	Ultimate Pullout Performance in 4,000 psi Concrete up to 26,540 lbs. (1" diameter)	Hex nut Tie-Wire version	ICC Evaluation Service, Inc. # ESR-2251 Underwriters Laboratories Factory Mutual Caltrans Meets or exceeds U.S. Government G.S.A. Specification A-A-1923A Type 4 (formerly GSA: FF-S-325 Group II, Type 4, Class 1)
LDT cont'd	<ul style="list-style-type: none"> Zinc-plated carbon steel to ASTM B695 & B633 Type 410 stainless steel 	Ultimate Pullout Performance in 4,000 psi Concrete up to 23,266 lbs. (3/4" diameter)	Finished bolt style	
Multi-Set II Drop-In cont'd	<ul style="list-style-type: none"> Zinc-plated carbon steel to ASTM B633, SC1, Type III Type 304 and 316 stainless steel 	Ultimate Pullout Performance in 4,000 psi Concrete up to 9,480 lbs. (3/4" diameter)	RM: Flanged body RL: Non-flanged body Use any bolt or threaded rod	GSA: A-A-55614 Type 1 (Formerly GSA: FF-S-325 Group VIII) Underwriters Laboratories Factory Mutual Caltrans
Dynabolt® Sleeve cont'd	<ul style="list-style-type: none"> Zinc-plated carbon steel to ASTM B633, SC1, Type III Type 304 stainless steel 	Ultimate Pullout Performance in 4,000 psi Concrete up to 8,900 lbs. (3/4" diameter)	Flat head Hex nut Acorn nut Tie-Wire Round head Threshold flat head	GSA: A-A-1922A (Formerly GSA: FF-S-325 Group II, Type 3, Class 3) Factory Mutual
Tapcon cont'd	<ul style="list-style-type: none"> Patented Trade Secret Climaseal® coating Type 410 stainless steel <p>The above is for the Original and 410 SS Tapcon only. For data on other Tapcon products see their product pages as follows: Tapcon Maxi-Set on page 94, Tapcon SCOTS on page 94, Tapcon XL on page 98, and Tapcon StormGuard on page 100.</p>	Ultimate Pullout Performance in 4,000 psi Concrete up to 2,380 lbs.	Hex head Phillips flat head	Blue Climaseal™ ICC Evaluation Service, Inc.— ESR-1671 ICC Evaluation Service, Inc.— ESR-2202 Miami-Dade County Florida Building Code 410 Stainless Steel Miami-Dade County Florida Building Code

Because applications vary, ITW RED HEAD cannot guarantee the performance of this product. Each customer assumes all responsibility and risk for the use of this product. The safe handling and the suitability of this product for use is the sole responsibility of the customer. Specific job site conditions should be considered when selecting the proper product. Should you have any questions, please call the Technical Assistance Department at 800-848-5611.



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



Trubolt® Wedge Anchors

**Dependable,
Heavy-Duty,
Inspectable,
Wedge Type
Expansion
Anchor**



**2018 IBC
Compliant**

Trubolt®
Wedge Anchors

DESCRIPTION/SUGGESTED SPECIFICATIONS

Wedge Type Anchors—

SPECIFIED FOR ANCHORAGE INTO CONCRETE

Trubolt Wedge anchors feature a stainless steel expansion clip, threaded stud body, nut and washer. Anchor bodies are made of plated carbon steel, hot-dipped galvanized carbon steel, type 304 stainless steel or type 316 stainless steel as identified in the drawings or other notations.



Trubolt
Wedge
Anchor

The exposed end of the anchor is stamped to identify anchor length. Stampings should be preserved during installation for any subsequent embedment verification.

Use carbide tipped hammer drill bits made in accordance with ANSI B212.15-1994 to install anchors.

Anchors are tested to ACI 355.2 and ICC-ES AC193. Anchors are listed by the following agencies as required by the local building code: ICC-ES, UL, FM, and Caltrans.


ADVANTAGES

- 2015 International Building Code (IBC) Compliant for 1/4" through 1/2" diameters-carbon steel
- Versatile fully threaded design is standard on sizes up to 1" diameter and 10" length
- Anchor diameter equals hole diameter
- Standard carbon and stainless steel anchors
- Non bottom-bearing, may be used in hole depth exceeding anchor length
- Can be installed through the work fixture, eliminating hole spotting
- Inspectable torque values, indicating proper installation

Fully Threaded Advantage

Trubolt's fully threaded feature eliminates subsurface obstruction problems.

Fully threaded design accommodates various material thicknesses at the same embedment. One anchor length saves time and money.

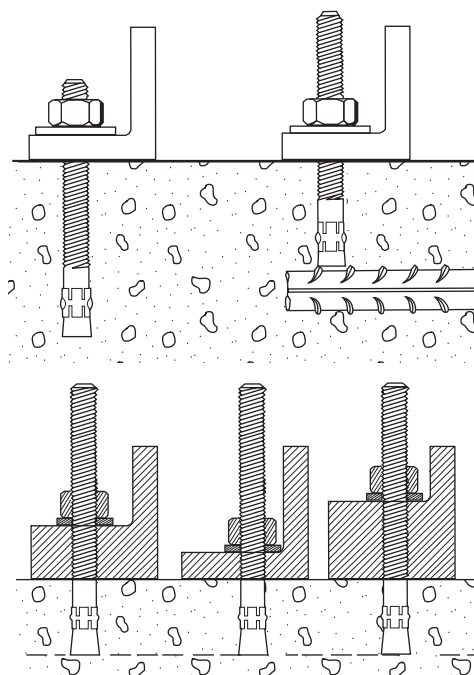

APPLICATIONS



Anchoring machinery and conveyors is a common wedge anchor application. The Trubolt is fully threaded to allow a large range of embedment and fixture thickness.

LENGTH INDICATION CODE*

CODE	LENGTH OF ANCHOR		CODE	LENGTH OF ANCHOR	
	in.	mm		in.	mm
A	1-1/2 < 2	(38.1 < 50.8)	K	6-1/2 < 7	(165.1 < 177.8)
B	2 < 2-1/2	(50.8 < 63.5)	L	7 < 7-1/2	(177.8 < 190.5)
C	2-1/2 < 3	(63.5 < 76.2)	M	7-1/2 < 8	(190.5 < 203.2)
D	3 < 3-1/2	(76.2 < 88.9)	N	8 < 8-1/2	(203.2 < 215.9)
E	3-1/2 < 4	(88.9 < 101.6)	O	8-1/2 < 9	(215.9 < 228.6)
F	4 < 4-1/2	(101.6 < 114.3)	P	9 < 9-1/2	(228.6 < 241.3)
G	4-1/2 < 5	(114.3 < 127.0)	Q	9-1/2 < 10	(241.3 < 254.0)
H	5 < 5-1/2	(127.0 < 139.7)	R	10 < 11	(254.0 < 279.4)
I	5-1/2 < 6	(139.7 < 152.4)	S	11 < 12	(279.4 < 304.8)
J	6 < 6-1/2	(152.4 < 165.1)	T	12 < 13	(304.8 < 330.2)

*Located on top of anchor for easy inspection.

FEATURES



Length ID Head Stamp—provides for embedment inspection after installation

Fully Threaded Design

Cold-Formed—manufacturing process adds strength

Stainless steel split expansion ring

Anchor Body—available in zinc-plated steel, hot-dipped galvanized steel, 304 stainless steel and 316 stainless steel

TRUBOLT® WEDGE ANCHOR

APPROVALS/LISTINGS

Trubolt® Wedge Anchors

ICC Evaluation Service, Inc. ESR-2251

- Category 1 performance rating
- 2018 IBC compliant
- Meets ACI 318 ductility requirements
- Tested in accordance with ACI 355.2 and ICC-ES AC193
- For use in seismic zones A & B
- 1/4", 3/8" & 1/2" diameter anchors listed in ESR-2251

Underwriters Laboratories


Factory Mutual

Caltrans

Meets or exceeds U.S. Government G.S.A. Specification A-A-1923A Type 4 (formerly GSA: FF-S-325 Group II, Type 4, Class 1)



INSTALLATION STEPS



1. Select a carbide drill bit with a diameter equal to the anchor diameter. Drill hole to any depth exceeding the desired embedment. See chart for minimum recommended embedment.
2. Clean hole or continue drilling additional depth to accommodate drill fines.
3. Assemble washer and nut, leaving top of stud exposed through nut. Drive anchor through material to be fastened until washer is flush to surface of material.
4. Expand anchor by tightening nut 3-5 turns past the hand tight position, or to the specified torque requirement.


**** ONLY FOR USE IN CONCRETE ****

SELECTION CHART

Trubolt Wedge

Carbon Steel w/Zinc Plating

Meets ASTM B633 SC1, Type III specifications for electroplating of 5um = .0002" thickness.
This material is well suited for non-corrosive environments.




Typical Applications—
Structural Columns,
Machinery, Equipment, etc.

Environment—Interior
(non-corrosive)

Level of Corrosion—Low

TW-1400 Tie Wire Wedge

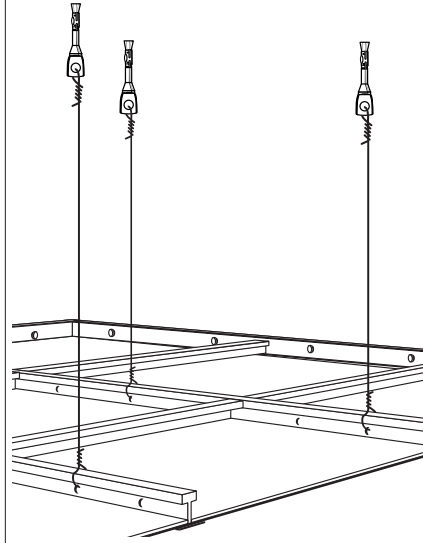

PART NUMBER	THREAD LENGTH		ANCHOR DIA. & DRILL BIT SIZE (THREADS) PER INCH	OVERALL LENGTH		MAX. THICKNESS OF MATERIALS TO BE FASTENED		QTY/WT PER BOX		QTY/WT PER MASTER CARTON	
	in.	(mm)		in.	(mm)	in.	(mm)	qty.	lbs.	qty.	lbs.
WS-1416	3/4	(19.1)	1/4" - 20	1-3/4	(44.5)	3/8	(9.5)	100	3.1	1000	32
WS-1422	1-1/4	(31.8)		2-1/4	(57.2)	7/8	(22.2)	100	3.6	1000	37
WS-1432	2-1/4	(57.2)		3-1/4	(82.6)	1-7/8	(47.6)	100	4.7	800	39
WS-3822	1-1/8	(28.6)	3/8" - 16	2-1/4	(57.2)	3/8	(9.5)	50	4.1	500	41
WS-3826	1-5/8	(41.3)		2-3/4	(69.9)	7/8	(22.2)	50	4.7	400	39
WS-3830	1-3/4	(44.5)		3	(76.2)	1-1/8	(28.6)	50	5.0	400	41
WS-3836	2-1/2	(63.5)		3-3/4	(95.3)	1-7/8	(47.6)	50	5.9	300	36
WS-3850	3-3/4	(95.2)		5	(127.0)	3-1/8	(79.4)	50	7.4	250	38
WS-3870	3-7/8	(98.4)	1/2" - 13	7	(177.8)	5-1/8	(130.2)	50	10.4	250	53
WS-1226	1-1/4	(31.8)		2-3/4	(69.9)	1/8	(3.2)	25	4.6	200	38
WS-1236	2-1/4	(57.2)		3-3/4	(95.3)	1	(25.4)	25	5.7	150	35
WS-1242	2-3/4	(69.9)		4-1/4	(108.0)	1-1/2	(38.1)	25	6.2	150	38
WS-1244	3	(76.2)		4-1/2	(114.3)	1-3/4	(44.5)	25	6.5	150	39
WS-1254	4	(101.6)	5/8" - 11	5-1/2	(139.7)	2-3/4	(69.9)	25	7.7	150	47
WS-1270	5-1/2	(139.7)		7	(177.8)	4-1/4	(108.0)	25	9.3	150	57
WS-5834	1-3/4	(44.5)		3-1/2	(88.9)	1/8	(3.2)	10	3.6	100	37
WS-5842	2-1/2	(63.5)		4-1/4	(108.0)	7/8	(22.2)	10	4.1	100	42
WS-5850	3-1/4	(82.6)		5	(127.0)	1-5/8	(41.3)	10	4.7	100	48
WS-5860	4-1/4	(107.9)	3/4" - 10	6	(152.4)	2-5/8	(66.7)	10	5.4	50	28
WS-5870	5-1/4	(133.4)		7	(177.8)	3-5/8	(92.1)	10	6.2	30	19
WS-5884	5-3/4	(146.0)		8-1/2	(215.9)	5-1/8	(130.2)	10	8.0	30	25
WS-58100	5-3/4	(146.0)		10	(254.0)	6-5/8	(168.3)	10	9.4	30	29
WS-3442	2-3/8	(60.3)		4-1/4	(108.0)	1/4	(31.8)	10	6.8	60	42
WS-3446	2-7/8	(73.0)	7/8" - 9	4-3/4	(120.7)	3/4	(19.1)	10	7.4	60	45
WS-3454	3-5/8	(92.1)		5-1/2	(139.7)	1-1/2	(38.1)	10	8.1	50	41
WS-3462	4-3/8	(111.1)		6-1/4	(158.8)	2-1/4	(57.2)	10	9.1	30	28
WS-3470	5-1/8	(130.2)		7	(177.8)	3	(76.2)	10	9.7	30	30
WS-3484	5-3/4	(146.0)		8-1/2	(215.9)	4-1/2	(114.3)	10	12.3	30	38
WS-34100	5-3/4	(146.0)	1" - 8	10	(254.0)	6	(152.4)	10	14.0	30	43
WS-34120	1-3/4	(44.5)		12	(304.8)	8	(203.2)	10	16.6	30	51
WS-7860	2-1/2	(63.5)		6	(152.4)	1-3/8	(34.9)	5	6.3	25	32
WS-7880	2-1/2	(63.5)		8	(203.2)	3-3/8	(85.7)	5	8.1	15	25
WS-78100	2-1/2	(63.5)		10	(254.0)	5-3/8	(136.5)	5	9.8	15	30
WS-10060	2-1/2	(63.5)	1" - 8	6	(152.4)	1/2	(12.7)	5	8.3	25	43
WS-10090	2-1/2	(63.5)		9	(228.6)	3-1/2	(88.9)	5	11.6	15	36
WS-100120	2-1/2	(63.5)		12	(304.8)	6-1/2	(165.1)	5	15.0	15	46
TIE WIRE											
TW-1400	N/A		1/4"	2-1/8	(54.0)	9/32-hole	(7.1)	100	3.6	1000	36

SELECTION CHART

Trubolt Wedge

Carbon Steel w/
Hot Dipped Galvanizing

Meets ASTM A153 Class specifications for hot-dipped galvanizing > 45um = .002". It is highly recommended for damp, humid environments near coastal regions. Hot-dipped galvanized Trubolts have a coating thickness of zinc that is almost 10 times as thick as electroplating. This creates greater corrosion resistance at a minimal cost.



Typical Applications—
Railings, Signage, Awnings,
etc.

Environment—Rural/
Suburban (exterior
environment—essentially
unpolluted areas)

Level of Corrosion—
Low to Medium

PART NUMBER	THREAD LENGTH		ANCHOR DIA. & DRILL BIT SIZE (THREADS) PER INCH	OVERALL LENGTH		MAX. THICKNESS OF MATERIALS TO BE FASTENED		QTY/WT PER BOX		QTY/WT PER MASTER CARTON	
	in.	(mm)		in.	(mm)	in.	(mm)	qty.	lbs.	qty.	lbs.
WS-1226G	1-1/4	(31.8)	1/2" - 13	2-3/4	(69.9)	1/8	(3.2)	25	4.8	200	39
WS-1242G	2-3/4	(69.9)		4-1/4	(108.0)	1-1/2	(38.1)	25	6.7	150	41
WS-1254G	4	(101.6)		5-1/2	(139.7)	2-3/4	(69.9)	25	8.0	150	49
WS-1270G	5-1/2	(139.7)	5/8" - 11	7	(177.8)	4-1/4	(108.0)	25	9.7	150	59
WS-5834G	1-3/4	(44.5)		3-1/2	(88.9)	1/8	(3.2)	10	3.7	100	38
WS-5860G	4-1/4	(107.9)		6	(152.4)	2-5/8	(66.7)	10	5.6	50	29
WS-3446G	2-7/8	(73.0)	3/4" - 10	4-3/4	(120.7)	3/4	(19.1)	10	7.5	60	46
WS-3454G	3-5/8	(92.1)		5-1/2	(139.7)	1-1/2	(38.1)	10	8.4	50	42
WS-3484G	5-3/4	(146.0)		8-1/2	(215.9)	4-1/2	(114.3)	10	12.5	30	38

SELECTION CHARTS

Trubolt Wedge 304 Stainless Steel

Serves many applications well. It withstands rusting in architectural and food processing environments and resists organic chemicals, dye stuffs and many inorganic chemicals.



Typical Applications—
Cladding, Stadium Seating, etc.

Environment—Urban
(slight to moderate
degree of pollution)

Level of Corrosion—Medium

PART NUMBER	THREAD LENGTH		ANCHOR DIA. & DRILL BIT SIZE (THREADS) PER INCH	OVERALL LENGTH		MAX. THICKNESS OF MATERIALS TO BE FASTENED		QTY/WT PER BOX		QTY/WT PER MASTER CARTON	
	in.	(mm)		in.	(mm)	in.	(mm)	qty.	lbs.	qty.	lbs.
WW-1416	3/4	(19.1)	1/4" - 20	1-3/4	(44.5)	3/8	(9.5)	100	3.2	1000	32
WW-1422	1-1/4	(31.8)		2-1/4	(57.2)	7/8	(22.2)	100	3.7	1000	37
WW-1432	2-1/4	(57.2)		3-1/4	(82.6)	1-7/8	(47.6)	100	4.8	800	39
WW-3822	1-1/8	(28.6)	3/8" - 16	2-1/4	(57.2)	3/8	(9.5)	50	4.1	500	41
WW-3826	1-5/8	(41.3)		2-3/4	(69.9)	7/8	(22.2)	50	4.8	400	39
WW-3830	1-3/4	(44.5)		3	(76.2)	1-1/8	(28.6)	50	5.1	400	42
WW-3836	2-1/2	(63.5)		3-3/4	(95.3)	1-7/8	(47.6)	50	6.0	300	37
WW-3850	3-3/4	(95.3)		5	(127.0)	3-1/8	(79.4)	50	7.5	250	39
WW-1226	1-1/4	(31.8)	1/2" - 13	2-3/4	(69.9)	1/8	(3.2)	25	4.7	200	38
WW-1236	2-1/4	(57.2)		3-3/4	(95.3)	1	(25.4)	25	5.8	150	36
WW-1242	2-3/4	(69.9)		4-1/4	(108.0)	1-1/2	(38.1)	25	6.3	150	39
WW-1254	3	(76.2)		5-1/2	(139.7)	2-3/4	(69.9)	25	7.7	150	47
WW-1270	3-1/2	(88.9)		7	(177.8)	4-1/4	(108.0)	25	9.4	150	57
WW-5834	1-3/4	(44.5)	5/8" - 11	3-1/2	(88.9)	1/8	(3.2)	10	3.6	100	37
WW-5842	2-1/2	(63.5)		4-1/4	(108.0)	7/8	(22.2)	10	4.2	100	43
WW-5850	3-1/4	(82.6)		5	(127.0)	1-5/8	(41.3)	10	4.8	100	49
WW-5860	4-1/4	(107.9)		6	(152.4)	2-5/8	(66.7)	10	5.5	50	28
WW-5870	3-1/2	(88.9)		7	(177.8)	3-5/8	(92.1)	10	6.2	30	20
WW-5884	3-1/2	(88.9)	3/4" - 10	8-1/2	(215.9)	5-1/8	(130.2)	10	8.0	30	25
WW-3446	2-7/8	(73.0)		4-3/4	(120.7)	3/4	(19.1)	10	6.7	60	41
WW-3454	3-5/8	(92.1)		5-1/2	(139.7)	1-1/2	(38.1)	10	7.5	50	38
WW-3470	3-1/2	(88.9)		7	(177.8)	3	(76.2)	10	9.2	30	28
WW-3484	3-1/2	(88.9)		8-1/2	(215.9)	4-1/2	(114.3)	10	12.3	30	38
WW-34100	1-3/4	(44.5)	1" - 8	10	(254.0)	6	(152.4)	10	13.5	30	42
WW-10060	2-1/2	(63.5)		6	(152.4)	1/2	(12.7)	5	8.3	25	43
WW-10090	2-1/2	(63.5)		9	(228.6)	3-1/2	(88.9)	5	11.4	15	35

* For continuous extreme low temperature applications, use stainless steel.

SELECTION CHARTS

Trubolt Wedge 316 Stainless Steel

Contains more nickel and chromium than Type 304, and 2%-3% molybdenum, which gives it better corrosion resistance. It is especially more effective in chloride environments that tend to cause pitting.



Typical Applications—
Pumps, Diffusers, Gates,
Weir Plates, etc.

Environment—Industrial
(moderate to heavy
atmospheric pollution)

Level of Corrosion—
Medium to High



Typical Applications—
Tunnels, Dams, Tiles,
Lighting Fixtures, etc.

Environment—
Marine (heavy atmospheric
pollution)

Level of Corrosion—High

PART NUMBER	THREAD LENGTH		ANCHOR DIA. & DRILL BIT SIZE (THREADS) PER INCH	OVERALL LENGTH		MAX. THICKNESS OF MATERIALS TO BE FASTENED		QTY/WT PER BOX		QTY/WT PER MASTER CARTON	
	in.	(mm)		in.	(mm)	in.	(mm)	qty.	lbs.	qty.	lbs.
SWW-1422	1-1/4	(31.8)	1/4" - 20	2-1/4	(57.2)	7/8	(22.2)	100/	3.7	1000/	37
SWW-1432	2-1/4	(57.2)		3-1/4	(82.6)	1-1/8	(28.6)	100/	4.8	1000/	39
SWW-3822	1-1/8	(28.6)		2-1/4	(57.2)	3/8	(9.5)	50/	4.1	500/	41
SWW-3826	1-5/8	(41.3)	3/8" - 16	2-3/4	(69.9)	7/8	(22.2)	50/	4.8	400/	39
SWW-3830	1-3/4	(44.5)		3	(76.2)	1-1/8	(28.6)	50/	5.2	400/	42
SWW-3836	2-1/2	(63.5)		3-3/4	(95.5)	1-7/8	(47.6)	50/	6.0	300/	37
SWW-3850	3-3/4	(95.3)		5	(127.0)	3-1/8	(79.4)	50/	7.5	250/	39
SWW-1226	1-1/4	(31.8)		2-3/4	(69.9)	1/8	(3.2)	25/	4.7	200/	39
SWW-1236	2-1/4	(57.2)	1/2" - 13	3-3/4	(95.3)	1	(25.4)	25/	5.8	150/	36
SWW-1242	2-3/4	(69.9)		4-1/4	(108.0)	1-1/2	(38.1)	25/	6.5	150/	40
SWW-1254	3	(76.2)		5-1/2	(139.7)	2-3/4	(69.9)	25/	7.8	150/	48
SWW-5842	2-1/2	(63.5)		4-1/4	(108.0)	7/8	(22.2)	10/	4.2	100/	43
SWW-5850	3-1/4	(82.6)		5	(127.0)	1-5/8	(41.3)	10/	4.8	100/	49
SWW-5870	3-1/2	(88.9)	5/8" - 11	7	(177.8)	3-5/8	(92.1)	10/	6.7	30/	21

* For continuous extreme low temperature applications, use stainless steel.

PERFORMANCE TABLE

Trubolt Wedge Anchors

Ultimate Tension and Shear Values (lbs/kN) in Solid Concrete*

ANCHOR DIA. in. (mm)		INSTALLATION TORQUE ft. lbs. (Nm)		EMBEDMENT DEPTH in. (mm)		ANCHOR TYPE	f'c + 2,000 PSI (13.8 MPa)				f'c + 4,000 PSI (27.6 MPa)				f'c + 6,000 PSI (41.4 MPa)			
							TENSION		SHEAR		TENSION		SHEAR		TENSION		SHEAR	
lbs. (kN)	lbs. (kN)	lbs. (kN)	lbs. (kN)	lbs. (kN)	lbs. (kN)		lbs. (kN)	lbs. (kN)	lbs. (kN)	lbs. (kN)	lbs. (kN)	lbs. (kN)	lbs. (kN)	lbs. (kN)	lbs. (kN)	lbs. (kN)		
1/4	(6.4)	4	(5.4)	1-1/8	(28.6)	WS-Carbon or WS-G Hot-Dipped Galvanized or WW-304 S.S. or SWW-316 S.S.	1,180	(5.2)	1,400	(6.2)	1,780	(7.9)	1,400	(6.2)	1,900	(8.5)	1,400	(6.2)
				1-15/16	(49.2)		2,100	(9.3)	1,680	(7.5)	3,300	(14.7)	1,680	(7.5)	3,300	(14.7)	1,680	(7.5)
				2-1/8	(54.0)		2,260	(10.1)	1,680	(7.5)	3,300	(14.7)	1,680	(7.5)	3,300	(14.7)	1,680	(7.5)
3/8	(9.5)	25	(33.9)	1-1/2	(38.1)		1,620	(7.5)	2,320	(10.3)	2,240	(10.0)	2,620	(11.7)	2,840	(12.6)	3,160	(14.1)
				3	(76.2)		3,480	(15.5)	4,000	(17.8)	5,940	(26.4)	4,140	(18.4)	6,120	(27.2)	4,500	(20.0)
				4	(101.6)		4,800	(21.4)	4,000	(17.8)	5,940	(26.4)	4,140	(18.4)	6,120	(27.2)	4,500	(20.0)
1/2	(12.7)	55	(74.6)	2-1/4	(57.2)		3,455	(20.7)	4,760	(21.2)	4,920	(22.7)	4,760	(21.2)	6,025	(31.3)	7,040	(31.3)
				4-1/8	(104.8)		4,660	(20.7)	7,240	(32.2)	9,640	(42.9)	7,240	(32.2)	10,820	(48.1)	8,160	(36.3)
				6	(152.4)		5,340	(23.8)	7,240	(32.2)	9,640	(42.9)	7,240	(32.2)	10,820	(48.1)	8,160	(36.3)
5/8	(15.9)	90	(122.0)	2-3/4	(69.9)		5,185	(29.3)	7,120	(31.7)	7,180	(31.9)	7,120	(31.7)	9,225	(43.2)	9,616	(42.8)
				5-1/8	(130.2)		6,580	(29.3)	9,600	(42.7)	14,920	(66.4)	11,900	(52.9)	16,380	(72.9)	12,520	(55.7)
				7-1/2	(190.5)		7,060	(31.4)	9,600	(42.7)	15,020	(66.8)	11,900	(52.9)	16,380	(72.9)	12,520	(55.7)
3/4	(19.1)	110	(149.2)	3-1/4	(82.6)		6,765	(31.7)	10,120	(45.0)	10,840	(48.2)	13,720	(61.0)	13,300	(59.2)	15,980	(71.1)
				6-5/8	(168.3)		10,980	(48.8)	20,320	(90.4)	17,700	(78.7)	23,740	(105.6)	20,260	(90.1)	23,740	(105.6)
				10	(254.0)		10,980	(48.8)	20,320	(90.4)	17,880	(79.5)	23,740	(105.6)	23,580	(104.9)	23,740	(105.6)
7/8	(22.2)	250	(339.0)	3-3/4	(95.3)		9,290	(42.3)	13,160	(58.5)	14,740	(65.6)	16,580	(73.8)	17,420	(77.5)	19,160	(85.2)
				6-1/4	(158.8)		14,660	(65.2)	20,880	(92.9)	20,940	(93.1)	28,800	(128.1)	24,360	(108.4)	28,800	(128.1)
				8	(203.2)		14,660	(65.2)	20,880	(92.9)	20,940	(93.1)	28,800	(128.1)	24,360	(108.4)	28,800	(128.1)
1	(25.4)	300	(406.7)	4-1/2	(114.3)		11,770	(62.0)	16,080	(71.5)	19,245	(89.8)	22,820	(101.5)	21,180	(94.2)	24,480	(108.9)
				7-3/8	(187.3)		14,600	(64.9)	28,680	(127.6)	23,980	(106.7)	37,940	(168.8)	33,260	(148.0)	38,080	(169.4)
				9-1/2	(241.3)		18,700	(83.2)	28,680	(127.6)	26,540	(118.1)	37,940	(168.8)	33,260	(148.0)	38,080	(169.4)

* To calculate the Allowable Load of the anchor, divide the Ultimate Load by 4.

* For Tie-Wire Wedge Anchor, TW-1400, use tension data from 1/4" diameter with 1-1/8" embedment.

* For continuous extreme low temperature applications, use stainless steel.

PERFORMANCE TABLE

Trubolt Wedge Anchors

Ultimate Tension and Shear Values (lbs/kN) in Lightweight Concrete*

ANCHOR DIA. in. (mm)		INSTLLATION TORQUE ft. lbs. (Nm)		EMBEDMENT DEPTH in. (mm)		ANCHOR TYPE	LIGHTWEIGHT CONCRETE f'c + 3,000 PSI (20.7 MPa)				LOWER FLUTE OF STEEL DECK WITH LIGHTWEIGHT CONCRETE FILL f'c + 3,000 PSI (20.7 MPa)			
							TENSION		SHEAR		TENSION		SHEAR	
							lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
3/8	(9.5)	25	(33.9)	1-1/2	(38.1)	WS-Carbon or WS-G Hot-Dipped Galvanized or WW-304 S.S. or SWW-316 S.S.	1,175	(5.2)	1,480	(6.6)	1,900	(8.5)	3,160	(14.1)
				3	(76.2)		2,825	(12.6)	2,440	(10.9)	2,840	(12.6)	4,000	(17.8)
1/2	(12.7)	55	(74.6)	2-1/4	(57.2)		2,925	(13.0)	2,855	(12.7)	3,400	(15.1)	5,380	(23.9)
				3	(76.2)		3,470	(15.4)	3,450	(15.3)	4,480	(19.9)	6,620	(29.4)
				4	(101.6)		4,290	(19.1)	3,450	(15.3)	4,800	(21.4)	6,440	(28.6)
5/8	(15.9)	90	(122.0)	3	(76.2)		4,375	(19.5)	4,360	(19.4)	4,720	(21.0)	5,500	(24.5)
				5	(127.0)		6,350	(28.2)	6,335	(28.2)	6,580	(29.3)	9,140	(40.7)
3/4	(19.1)	110	(149.2)	3-1/4	(82.6)		5,390	(24.0)	7,150	(31.8)	5,840	(26.0)	8,880	(39.5)
				5-1/4	(133.4)		7,295	(32.5)	10,750	(47.8)	7,040	(31.3)	N/A	N/A

* To calculate the Allowable Load of the anchor, divide the Ultimate Load by 4.

PERFORMANCE TABLE

Trubolt Wedge Anchors

Recommended Edge and Spacing Distance Requirements for Tension Loads*

ANCHOR DIA.		EMBEDMENT DEPTH		ANCHOR TYPE	EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD		MIN. ALLOWABLE EDGE DISTANCE AT WHICH THE LOAD FACTOR APPLIED = .65		SPACING REQUIRED TO OBTAIN MAX. WORKING LOAD		MIN. ALLOWABLE SPACING AT WHICH THE LOAD FACTOR APPLIED = .70	
in.	(mm)	in.	(mm)		in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)
1/4	(6.4)	1-1/8	(28.6)	WS-Carbon or WS-G Hot-Dipped Galvanized or WW-304 S.S. or SWW-316 S.S.	2	(50.8)	1	(25.4)	3-15/16	(100.0)	2	(50.8)
		1-15/16	(49.2)		1-15/16	(49.2)	1	(25.4)	3-7/8	(98.4)	1-15/16	(49.2)
		2-1/8	(54.0)		1-5/8	(41.3)	13/16	(20.6)	3-3/16	(81.0)	1-5/8	(41.3)
3/8	(9.5)	1-1/2	(38.1)		2-5/8	(66.7)	1-5/16	(33.3)	5-1/4	(133.4)	2-5/8	(66.7)
		3	(76.2)		3	(76.2)	1-1/2	(38.1)	6	(152.4)	3	(76.2)
		4	(101.6)		3	(76.2)	1-1/2	(38.1)	6	(152.4)	3	(76.2)
1/2	(12.7)	2-1/4	(57.2)		3-15/16	(100.0)	2	(50.8)	7-7/8	(200.0)	3-15/16	(100.0)
		4-1/8	(104.8)		3-1/8	(79.4)	1-9/16	(39.7)	6-3/16	(157.2)	3-1/8	(79.4)
		6	(152.4)		4-1/2	(114.3)	2-1/4	(57.2)	9	(228.6)	4-1/2	(114.3)
5/8	(15.9)	2-3/4	(69.9)		4-13/16	(122.2)	2-7/16	(61.9)	9-5/8	(244.5)	4-13/16	(122.2)
		5-1/8	(130.2)		3-7/8	(98.4)	1-15/16	(49.2)	7-1/16	(195.3)	3-7/8	(98.4)
		7-1/2	(190.5)		5-5/8	(142.9)	2-13/16	(71.4)	11-1/4	(285.8)	5-5/8	(142.9)
3/4	(19.1)	3-1/4	(82.6)		5-11/16	(144.5)	2-7/8	(73.0)	11-3/8	(288.9)	5-11/16	(144.5)
		6-5/8	(168.3)		5	(127.0)	2-1/2	(63.5)	9-15/16	(252.4)	5	(127.0)
		10	(254.0)		7-1/2	(190.5)	3-3/4	(95.3)	15	(381.0)	7-1/2	(190.5)
7/8	(22.2)	3-3/4	(95.3)		6-9/16	(166.7)	3-5/16	(84.1)	13-1/8	(333.4)	6-9/16	(166.7)
		6-1/4	(158.8)		6-1/4	(158.8)	3-1/8	(79.4)	12-1/2	(317.5)	6-1/4	(158.8)
		8	(203.2)		6	(152.4)	3	(76.2)	12	(304.8)	6	(152.4)
1	(25.4)	4-1/2	(114.3)		7-7/8	(200.0)	3-15/16	(100.0)	15-3/4	(400.1)	7-7/8	(200.0)
		7-3/8	(187.3)		7-3/8	(187.3)	3-11/16	(93.7)	14-3/4	(374.7)	7-3/8	(187.3)
		9-1/2	(241.3)		7-1/8	(181.0)	3-9/16	(90.5)	14-1/4	(362.0)	7-1/8	(181.0)

* Spacing and edge distances shall be divided by 0.75 when anchors are placed in structural lightweight concrete. Linear interpolation may be used for intermediate spacing and edge distances.

PERFORMANCE TABLE

Trubolt Wedge Anchors

Recommended Edge and Spacing Distance Requirements for Shear Loads*

ANCHOR DIA.		EMBEDMENT DEPTH		ANCHOR TYPE	EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD		MIN. EDGE DISTANCE AT WHICH THE LOAD FACTOR APPLIED = .60		MIN. EDGE DISTANCE AT WHICH THE LOAD FACTOR APPLIED = .20		SPACING REQUIRED TO OBTAIN MAX. WORKING LOAD		MIN. ALLOWABLE SPACING BETWEEN ANCHORS in. (mm) LOAD FACTOR APPLIED = .40	
in.	(mm)	in.	(mm)		in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)
1/4	(6.4)	1-1/8	(28.6)	WS-Carbon or WS-G Hot-Dipped Galvanized or WW-304 S.S. or SWW-316 S.S.	2	(50.8)	1-5/16	(33.3)	N/A	N/A	3-15/16	(100.0)	2	(50.8)
		1-15/16	(49.2)		1-15/16	(49.2)	1	(25.4)	N/A	N/A	3-7/8	(98.4)	1-15/16	(49.2)
3/8	(9.5)	1-1/2	(38.1)		2-5/8	(66.7)	1-3/4	(44.5)	N/A	N/A	5-1/4	(133.4)	2-5/8	(66.7)
		3	(76.2)		3-3/4	(95.3)	3	(76.2)	1-1/2	(38.1)	6	(152.4)	3	(76.2)
1/2	(12.7)	2-1/4	(57.2)		3-15/16	(100.0)	2-9/16	(65.1)	N/A	N/A	7-7/8	(200.0)	3-15/16	(100.0)
		4-1/8	(104.8)		5-3/16	(131.8)	3-1/8	(79.4)	1-9/16	(39.7)	6-3/16	(157.2)	3-1/8	(79.4)
5/8	(15.9)	2-3/4	(69.9)		4-13/16	(122.2)	3-1/8	(79.4)	N/A	N/A	9-5/8	(244.5)	4-13/16	(122.2)
		5-1/8	(130.2)		6-7/16	(163.5)	3-7/8	(98.4)	1-15/16	(49.2)	7-11/16	(195.3)	3-7/8	(98.4)
3/4	(19.1)	3-1/4	(82.6)		5-11/16	(144.5)	3-3/4	(95.3)	N/A	N/A	11-3/8	(288.9)	5-11/16	(144.5)
		6-5/8	(168.3)		6-5/16	(160.3)	5	(127.0)	2-1/2	(63.5)	9-15/16	(252.4)	5	(127.0)
7/8	(22.2)	3-3/4	(95.3)		6-9/16	(166.7)	4-5/16	(109.5)	N/A	N/A	13-1/8	(333.4)	6-9/16	(166.7)
		6-1/4	(158.8)		8-1/2	(215.9)	6-1/4	(158.8)	3-1/8	(79.4)	12-1/2	(317.5)	6-1/4	(158.8)
1	(25.4)	4-1/4	(108.0)		7-7/8	(200.0)	5-1/8	(130.2)	N/A	N/A	15-3/4	(400.1)	7-7/8	(200.0)
		7-3/8	(187.3)		10-1/16	(255.6)	7-3/8	(187.3)	3-11/16	(93.7)	14-3/4	(374.7)	7-3/8	(187.3)

* Spacing and edge distances shall be divided by 0.75 when anchors are placed in structural lightweight concrete. Linear interpolation may be used for intermediate spacing and edge distances.

Combined Tension and Shear Loading—for Trubolt Anchors

Allowable loads for anchors subjected to combined shear and tension forces are determined by the following equation:

$$(P_s/P_t)^{5/3} + (V_s/V_t)^{5/3} \leq 1$$

P_s = Applied tension load V_s = Applied shear load P_t = Allowable tension load V_t = Allowable shear load




Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



Large Diameter Tapcon (LDT) Anchors

**Finished head,
Removable Anchor**

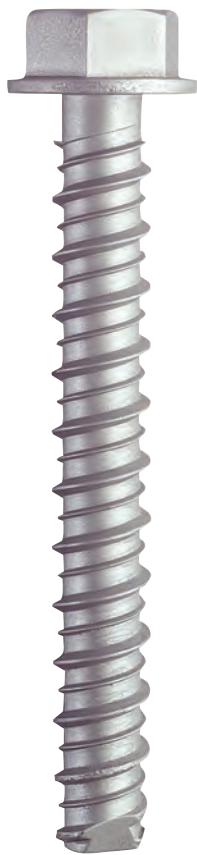

LDT

(3/8" & 1/2") (5/8" & 3/4")
Sawtooth™

**Uses standard drill bits—
no special drill bits to
purchase or lose!**

DESCRIPTION/SUGGESTED SPECIFICATIONS

Self-threading Anchors—

SPECIFIED FOR ANCHORAGE INTO CONCRETE



**LDT
Self-threading
Anchor**

The LDT anchor is a high performance anchor that cuts its own threads into concrete.

Anchor bodies are made of hardened carbon steel and zinc plated, **Grade 5**.

The anchors shall have a finished hex washer head with anti-rotation serrations to prevent anchor back-out. The head of the anchor is stamped with a length identification code for easy inspection.

The hole shall be drilled with carbide tipped hammer drill bits made in accordance to ANSI B212.15-1994.

ADVANTAGES

SAVE TIME

EASILY INSTALLED

- Installs in less than half the time of wedge anchors or adhesive anchors
- Simply drill a pilot hole and drive the LDT anchor by hand or impact

EASILY REMOVED

- No torching or grinding required to remove anchors

SAVE MONEY


LOWER DRILL BIT COSTS

- Use standard ANSI bits instead of proprietary bits
- Single piece design, no nut and washer to assemble

USE STANDARD ANSI BITS

- No special proprietary bits to purchase or lose
- Reduce chances for anchor failure due to incorrect bit usage

Sawtooth Threads™ diameters available on 5/8" and 3/4"

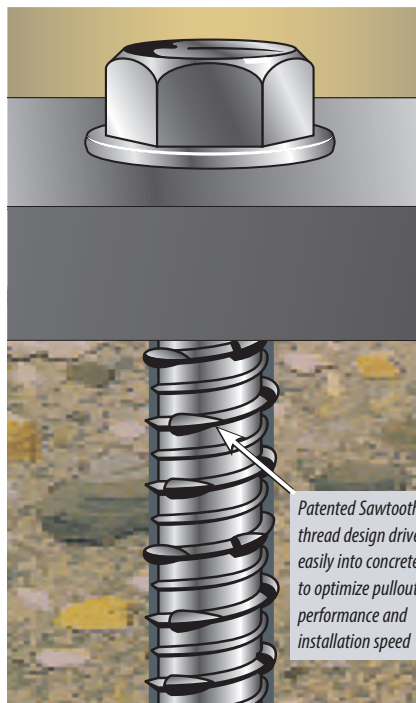

Patented Sawtooth™ thread design drives easily into concrete to optimize pullout performance and installation speed


IMPROVED PERFORMANCE IN LARGE DIAMETER HOLES

- Superior performance to wedge anchor
- Higher loads in shallow embedments
- Closer edge/spacing distance than mechanical anchors
- More threads for better thread engagement and higher pullout resistance
- Durable induction-hardened tip

EASY INSTALLATION

- Easy 2-step installation, simply drill a pilot hole and drive
- Installs in less than half the time of a wedge anchor
- Efficient thread cutting
- Use standard drill bit sizes
- Single piece design—no nut and washer assembly
- Easily removed

APPLICATIONS

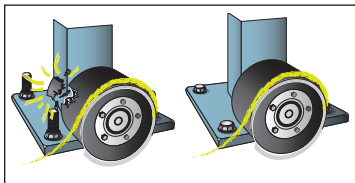


Racking, shelving and conveyors are just a few high volume applications ideal for Large Diameter Tapcon (LDT™). The ease and speed of installation of the LDT can reduce installation time to less than half the time of typical systems used today.

For installation speed, high performance and easy removability, LDT is the anchor of choice.

The LDT's finished head and lack of exposed threads virtually eliminates tire damage on fork lift trucks.

FEATURES

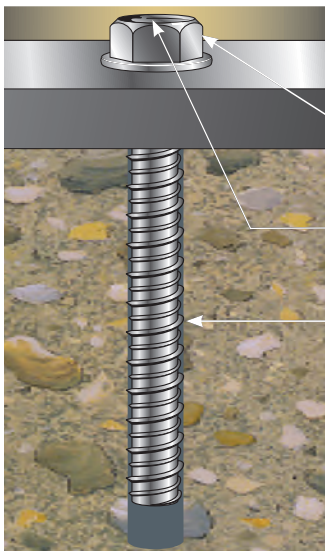

Easy Installation
Installs into concrete by hand or impact wrench

Anti-rotation Serrated Washer
— Prevents anchor back-out


Extra Large Hex Washer Head
— With increased bearing surface

Length Identification Head Stamp
— For embedment inspection after installation


Hi-Lo Threads
— Cuts its own threads into concrete for greater pull-out resistance

INSTALLATION STEPS

Installation Steps for Concrete, Lightweight Concrete and Metal Deck




1. Using the proper size carbide bit (see chart) drill a pilot hole at least 1" deeper than anchor embedment.




2. Using an **electric impact wrench**, or socket wrench (hand install) insert anchor into hole and tighten anchor until fully seated. (see chart for socket size) (do not over tighten).

Installation Steps for Hollow or Grout-Filled CMU (3/8" and 1/2" diameter)



1. Using a 5/16" (for 3/8" LDT) or 7/16" (for 1/2" LDT) carbide tipped bit, drill a pilot hole at least 1" deeper than anchor embedment.



2. Using a socket wrench insert anchor into hole and hand tighten anchor until fully seated. (9/16" socket for 3/8" and 3/4" socket for 1/2") (do not over tighten).



LDT's can be installed with an impact wrench in solid concrete only

Installation by hand—is easy, simply using a socket wrench




Installation by impact wrench—is recommended for faster installations or for high volume projects. Installation with impact wrench—is **not recommended for hollow block**.

SELECTION CHART

LDT SIZE	ANSI STANDARD DRILL BIT DIAM.	A ANCHOR HEAD (SOCKET SIZE) DIAM.	WASHER DIAM.	B MINIMUM EMBEDMENT	C HOLE DEPTH	USE IN		
						CONCRETE	CMU	
							HOLLOW	GROUT-FILLED
LDT 3/8"	5/16"	9/16"	13/16"	1-1/2"	2-1/2"	YES	YES	YES
LDT 1/2"	7/16"	3/4"	1"	2-1/2"	3-1/2"	YES	NO	YES
LDT 5/8"	1/2"	13/16"	1-3/16"	2-3/4"	3-3/4"	YES	NO	YES
LDT 3/4"	5/8"	15/16"	1-5/16"	3-1/4"	4-1/4"	YES	NO	YES

See page 75 for effective lengths and length indication code.




SELECTION CHART

LDT Carbon and Stainless Steel

Carbon Steel with Zinc Plating: Meets ASTM B695 and B633 specifications for zinc plating of $5\text{um} = .0002''$ thickness. This coating is well suited for non-corrosive interior environments.

Stainless Steel: Provides additional corrosion protection for outdoor applications.



PART NO. CARBON STEEL ZINC PLATED	PART NO. FOR 410 STAINLESS STEEL	ANCHOR DIA.		DRILL BIT DIA.		ANCHOR LENGTH		MAX. THICKNESS OF MATERIAL TO BE FASTENED		QTY/WT PER BOX qty / lbs.	QTY/WT PER MASTER CARTON qty / lbs.
		in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)		
LDT-3816	SLDT-3816	3/8	(9.5)	5/16	(7.9)	1-3/4	(44.5)	1/4	(6.4)	50 / 3.0	400 / 24.0
LDT-3824	SLDT-3824	3/8	(9.5)	5/16	(7.9)	2-1/2	(63.5)	1	(25.4)	50 / 4.5	400 / 34.0
LDT-3830	SLDT-3830	3/8	(9.5)	5/16	(7.9)	3	(76.2)	1-1/2	(38.1)	50 / 5.0	400 / 40.0
LDT-3840	SLDT-3840	3/8	(9.5)	5/16	(7.9)	4	(101.6)	2-1/2	(63.5)	50 / 6.5	400 / 52.0
LDT-3850	SLDT-3850	3/8	(9.5)	5/16	(7.9)	5	(127.0)	3-1/2	(89.0)	40 / 7.5	320 / 60.0
LDT-1230	SLDT-1230	1/2	(12.7)	7/16	(11.1)	3	(76.2)	1/2	(12.7)	25 / 4.5	150 / 27.0
LDT-1240	SLDT-1240	1/2	(12.7)	7/16	(11.1)	4	(101.6)	1-1/2	(38.1)	25 / 6.0	150 / 36.6
LDT-1250	SLDT-1250	1/2	(12.7)	7/16	(11.1)	5	(127.0)	2-1/2	(63.5)	25 / 7.6	150 / 45.6
LDT-1260	—	1/2	(12.7)	7/16	(11.1)	6	(152.4)	4	(101.6)	20 / 9.0	120 / 54.0
LDT-5830	—	5/8	(15.9)	1/2	(12.7)	3	(76.2)	1/4	(6.4)	10 / 3.5	100 / 35.0
LDT-5840	—	5/8	(15.9)	1/2	(12.7)	4	(101.6)	1-1/4	(31.8)	10 / 4.0	100 / 40.0
LDT-5850	—	5/8	(15.9)	1/2	(12.7)	5	(127.0)	2-1/4	(57.1)	10 / 4.7	100 / 47.0
LDT-5860	—	5/8	(15.9)	1/2	(12.7)	6	(152.4)	3-1/4	(82.6)	10 / 5.4	50 / 27.0
LDT-3444	—	3/4	(19.1)	5/8	(15.9)	4-1/2	(114.3)	1-1/4	(31.8)	10 / 7.4	50 / 37.0
LDT-3454	—	3/4	(19.1)	5/8	(15.9)	5-1/2	(139.7)	2-1/4	(57.1)	10 / 8.1	50 / 40.5
LDT-3462	—	3/4	(19.1)	5/8	(15.9)	6-1/4	(158.8)	3	(76.2)	10 / 9.1	30 / 27.3

* The stainless steel LDTs will have the number 4 stamped on the head next to the length indication code

DESIGN GUIDE

For proper selection of anchor diameters based upon pre-drilled holes in base plates and fixtures.

HOLE DIAMETER IN FIXTURE		SUGGESTED LDT DIAMETER	
in.	(mm)	in.	(mm)
7/16	(11.1)	3/8	(9.5)
1/2	(12.7)	3/8	(9.5)
9/16	(14.3)	1/2	(12.7)
5/8	(15.9)	1/2	(12.7)
3/4	(19.1)	5/8	(15.9)
7/8	(22.2)	3/4	(19.1)

LENGTH INDICATION CODE



Length Code letter located on top of head. Additional number 4 indicates 410 stainless steel

CODE	LENGTH OF ANCHOR	
	in.	(mm)
A	1-1/2 < 2	(38.1 < 50.8)
B	2 < 2-1/2	(50.8 < 63.5)
C	2-1/2 < 3	(63.5 < 76.2)
D	3 < 3-1/2	(76.2 < 88.9)
E	3-1/2 < 4	(88.9 < 101.6)
F	4 < 4-1/2	(101.6 < 114.3)
G	4-1/2 < 5	(114.3 < 127.0)
H	5 < 5-1/2	(127.0 < 139.7)
I	5-1/2 < 6	(139.7 < 152.4)
J	6 < 6-1/2	(152.4 < 165.1)

PERFORMANCE TABLE

LDT Anchors

Ultimate Tension and Shear Values (lbs/kN) in Solid Concrete

ANCHOR DIAMETER		EMBEDMENT DEPTH	$f'_c = 2000 \text{ PSI (13.8 MPa)}$				$f'_c = 3000 \text{ PSI (20.7 MPa)}$				$f'_c = 4000 \text{ PSI (27.6 MPa)}$			
			TENSION		SHEAR		TENSION		SHEAR		TENSION		SHEAR	
			lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
3/8	(9.5)	1-1/2 (38.1)	1,336	(5.9)	2,108	(9.4)	1,652	(7.3)	2,764	(12.3)	1,968	(8.8)	3,416	(15.2)
		2 (50.8)	1,492	(6.6)	3,036	(13.5)	2,024	(9.0)	3,228	(14.4)	2,552	(11.4)	3,420	(15.2)
		2-1/2 (63.5)	3,732	(16.6)	3,312	(14.7)	3,748	(16.7)	3,364	(15.0)	3,760	(16.7)	3,424	(15.2)
		3-1/2 (88.9)	5,396	(24.0)	3,312	(14.7)	6,624	(29.5)	3,368	(15.0)	7,852	(34.9)	3,428	(15.2)
1/2	(12.7)	2 (50.8)	3,580	(15.9)	5,644	(25.1)	3,908	(17.4)	6,512	(29.0)	4,236	(18.8)	7,380	(32.8)
		3-1/2 (88.9)	7,252	(32.3)	6,436	(28.6)	8,044	(35.8)	7,288	(32.4)	8,836	(39.3)	8,140	(36.2)
		4-1/2 (114.3)	10,176	(45.3)	7,384	(32.8)	10,332	(46.0)	7,968	(35.4)	10,488	(46.7)	8,552	(38.0)
5/8	(15.9)	2-3/4 (69.9)	5,276	(23.5)	8,656	(38.5)	6,560	(29.2)	11,064	(49.2)	7,844	(34.8)	13,476	(59.9)
		3-1/2 (88.9)	7,972	(35.5)	10,224	(45.5)	9,848	(43.8)	12,144	(54.0)	11,724	(52.2)	14,060	(62.5)
		4-1/2 (114.3)	11,568	(51.5)	12,316	(54.8)	13,432	(59.8)	13,580	(60.4)	16,892	(75.1)	14,840	(66.0)
3/4	(19.1)	3-1/4 (82.6)	6,876	(30.6)	7,140	(31.8)	9,756	(43.4)	10,728	(47.7)	12,636	(56.2)	14,316	(63.6)
		4-1/2 (114.3)	10,304	(45.8)	13,120	(58.4)	14,424	(64.2)	16,868	(75.0)	18,540	(82.5)	20,612	(91.7)
		5-1/2 (139.7)	13,048	(58.0)	17,908	(79.7)	18,156	(80.8)	21,718	(96.9)	23,268	(103.5)	25,652	(114.1)

To calculate the Allowable Load of the anchor, divide the Ultimate Load by 4.

PERFORMANCE TABLE

LDT Anchors

Ultimate Tension and Shear Values (lbs/kN) in Solid Concrete Carbon and Stainless Steel

ANCHOR DIAMETER in. (mm)		EMBEDMENT DEPTH in. (mm)		f'c = 2000 PSI (13.8 MPa)				f'c = 3000 PSI (20.7 MPa)				f'c = 4000 PSI (27.6 MPa)			
				TENSION		SHEAR		TENSION		SHEAR		TENSION		SHEAR	
				lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
3/8	(9.5)	1-1/2	(38.1)	1,336	(5.9)	2,108	(9.4)	1,652	(7.3)	2,764	(12.3)	1,968	(8.8)	3,416	(15.2)
		2	(50.8)	1,492	(6.6)	3,036	(13.5)	2,024	(9.0)	3,228	(14.4)	2,552	(11.4)	3,420	(15.2)
		2-1/2	(63.5)	3,732	(16.6)	3,312	(14.7)	3,748	(16.7)	3,364	(15.0)	3,760	(16.7)	3,424	(15.2)
		3-1/2	(88.9)	5,396	(24.0)	3,312	(14.7)	6,624	(29.5)	3,368	(15.0)	7,852	(34.9)	3,428	(15.2)
1/2	(12.7)	2	(50.8)	3,580	(15.9)	5,644	(25.1)	3,908	(17.4)	6,512	(29.0)	4,236	(18.8)	7,380	(32.8)
		3-1/2	(88.9)	7,252	(32.3)	6,436	(28.6)	8,044	(35.8)	7,288	(32.4)	8,836	(39.3)	8,140	(36.2)
		4-1/2	(114.3)	10,176	(45.3)	7,384	(32.8)	10,332	(46.0)	7,968	(35.4)	10,488	(46.7)	8,552	(38.0)
5/8	(15.9)	2-3/4	(69.9)	5,276	(23.5)	8,656	(38.5)	6,560	(29.2)	11,064	(49.2)	7,844	(34.8)	13,476	(59.9)
		3-1/2	(88.9)	7,972	(35.5)	10,224	(45.5)	9,848	(43.8)	12,144	(54.0)	11,724	(52.2)	14,060	(62.5)
		4-1/2	(114.3)	11,568	(51.5)	12,316	(54.8)	13,432	(59.8)	13,580	(60.4)	16,892	(75.1)	14,840	(66.0)
3/4	(19.1)	3-1/4	(82.6)	6,876	(30.6)	7,140	(31.8)	9,756	(43.4)	10,728	(47.7)	12,636	(56.2)	14,316	(63.6)
		4-1/2	(114.3)	10,304	(45.8)	13,120	(58.4)	14,424	(64.2)	16,868	(75.0)	18,540	(82.5)	20,612	(91.7)
		5-1/2	(139.7)	13,048	(58.0)	17,908	(79.7)	18,156	(80.8)	21,718	(96.9)	23,268	(103.5)	25,652	(114.1)

PERFORMANCE TABLE

LDT Anchors

Recommended Edge & Spacing Requirements for Tension Loads* Carbon and Stainless Steel in Concrete

ANCHOR DIAMETER		EMBEDMENT DEPTH		EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD		AT MIN. EDGE DISTANCE 1-3/4" (44mm)	SPACING DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD		LOAD FACTOR APPLIED AT MIN. SPACING DISTANCE 3" (76mm)
in.	(mm)	in.	(mm)	in.	(mm)		in.	(mm)	
3/8	(9.5)	1-1/2	(38.1)	2	(50.8)	70%	6	(152.4)	44%
		2	(50.8)	2	(50.8)	70%	6	(152.4)	44%
		2-1/2	(63.5)	3	(76.2)	70%	6	(152.4)	44%
		3-1/2	(88.9)	4	(101.6)	70%	6	(152.4)	44%
1/2	(12.7)	2	(50.8)	2-1/4	(57.2)	65%	8	(203.2)	27%
		3-1/2	(88.9)	3	(76.2)	65%	8	(203.2)	27%
		4-1/2	(114.3)	4	(101.6)	65%	8	(203.2)	27%
ANCHOR DIAMETER		EMBEDMENT DEPTH		EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD		AT MIN. EDGE DISTANCE 1-3/4" (44mm)	SPACING DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD		LOAD FACTOR APPLIED AT MIN. SPACING DISTANCE 3.75" (95.2mm)
in.	(mm)	in.	(mm)	in.	(mm)		in.	(mm)	
5/8	(15.9)	2-3/4	(69.9)	6-1/4	(158.8)	65%	10	(254)	50%
		3-1/2	(88.9)	6-1/4	(158.8)	65%	10	(254)	50%
		4-1/2	(114.3)	6-1/4	(158.8)	65%	10	(254)	50%
ANCHOR DIAMETER		EMBEDMENT DEPTH		EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD		AT MIN. EDGE DISTANCE 1-3/4" (44mm)	SPACING DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD		LOAD FACTOR APPLIED AT MIN. SPACING DISTANCE 4.5" (114.3mm)
in.	(mm)	in.	(mm)	in.	(mm)		in.	(mm)	
3/4	(19.1)	3-1/2	(82.6)	7-1/2	(191)	65%	12	(305)	50%
		4-1/2	(114.3)	7-1/2	(191)	65%	12	(305)	50%
		5-1/2	(139.7)	7-1/2	(191)	65%	12	(305)	50%

* Edge and spacing distance shall be divided by .75 when anchors are placed in structural lightweight concrete. Linear interpolation may be used for intermediate spacing and edge distances.

For 5/8" and 3/4" LDT Anchors, the critical edge distance for these anchors is 10 times the anchor diameter. The edge distance of these anchors may be reduced to 1-3/4" provided a 0.65 load factor is used for tension loads, a 0.15 load factor is used for shear loads applied perpendicular to the edge, or a 0.60 load factor is used for shear loads applied parallel to the edge. Linear interpolation may be used for intermediate edge distances.



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



RED HEAD®

PERFORMANCE TABLE

LDT Anchors

Recommended Edge & Spacing Requirements for Shear Loads* Carbon and Stainless Steel in Concrete

ANCHOR DIAMETER		EMBEDMENT DEPTH		EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD		AT MIN. EDGE DISTANCE 1-3/4" (44mm)	SPACING DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD		LOAD FACTOR APPLIED AT MIN. SPACING DISTANCE 3" (76mm)
in.	(mm)	in.	(mm)	in.	(mm)		in.	(mm)	
3/8	(9.5)	1-1/2	(38.1)	3	(76.2)	25%	6	(152.4)	57%
		2	(50.8)	4	(101.6)	25%	6	(152.4)	57%
		2-1/2	(63.5)	5	(127.0)	25%	6	(152.4)	57%
		3-1/2	(88.9)	5	(127.0)	25%	6	(152.4)	57%
1/2	(12.7)	2	(50.8)	5	(127.0)	25%	8	(203.2)	60%
		3-1/2	(88.9)	5	(127.0)	25%	8	(203.2)	60%
		4-1/2	(114.3)	5-1/2	(139.7)	25%	8	(203.2)	60%
5/8	(15.9)	2-3/4	(69.9)	6-1/4	(158.8)	15%**/60%***	10	(254)	75%
		3-1/2	(88.9)	6-1/4	(158.8)	15%**/60%***	10	(254)	75%
		4-1/2	(114.3)	6-1/4	(158.8)	15%**/60%***	10	(254)	75%
3/4	(19.1)	3-1/2	(82.6)	7-1/2	(191)	15%**/60%***	12	(305)	75%
		4-1/2	(114.3)	7-1/2	(191)	15%**/60%***	12	(305)	75%
		5-1/2	(139.7)	7-1/2	(191)	15%**/60%***	12	(305)	75%

* Edge and spacing distances shall be divided by .75 when anchors are placed in structural lightweight concrete. Linear interpolation may be used for intermediate spacing and edge distances.

** 15% = shear load applied perpendicular to the edge

*** 60% = shear load applied parallel to the edge

PERFORMANCE TABLE

LDT Anchors

Ultimate Tension Load (lbs/kN) in Concrete Block (anchors should be installed by hand in hollow block)

ANCHOR DIAMETER		EMBEDMENT DEPTH		HOLLOW CONCRETE BLOCK				GROUT FILLED CONCRETE BLOCK			
				TENSION		SHEAR		TENSION		SHEAR	
in.	(mm)	in.	(mm)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
3/8	(9.5)	1-1/2	(38.1)	916	(4.1)	3,176	(14.1)	1,592	(7.1)	3,900	(17.3)
1/2	(12.7)	2-1/2	(63.5)	N/A		N/A		5,924	(26.4)	6,680	(29.7)

To calculate the Allowable Load of the anchor, divide the Ultimate Load by 4.

PERFORMANCE TABLE

LDT Anchors

Allowable Tension and Shear (lbs/kN) in Concrete Block (anchors should be installed by hand in hollow block)

ANCHOR DIAMETER		EMBEDMENT DEPTH		HOLLOW CONCRETE BLOCK				GROUT FILLED CONCRETE BLOCK			
				TENSION		SHEAR		TENSION		SHEAR	
in.	(mm)	in.	(mm)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
3/8	(9.5)	1-1/2	(38.1)	229	(1.0)	794	(3.5)	398	(1.8)	975	(4.3)
1/2	(12.7)	2-1/2	(63.5)	N/A		N/A		1,481	(6.6)	1,670	(7.4)



PERFORMANCE TABLE

LDT Anchors

Anchoring Overhead in 3,000 PSI Lightweight Concrete on Metal Deck

ANCHOR	DRILL HOLE DIAMETER		EMBEDMENT		3000PSI (20.7 MPa) CONCRETE				
					ULTIMATE TENSION LOAD			ALLOWABLE WORKING LOAD	
	in.	(mm)	lbs.	(kN)		lbs.	(kN)	lbs.	(kN)
3/8" LDT	5/16	(7.9)	1-1/2	(38.1)	Upper Flute	2,889	(12.9)	722	(3.2)
					Lower Flute	1,862	(8.3)	465	(2.1)

For use in concrete and concrete block

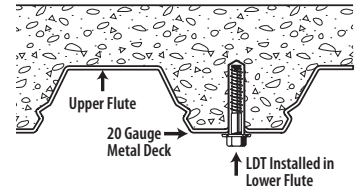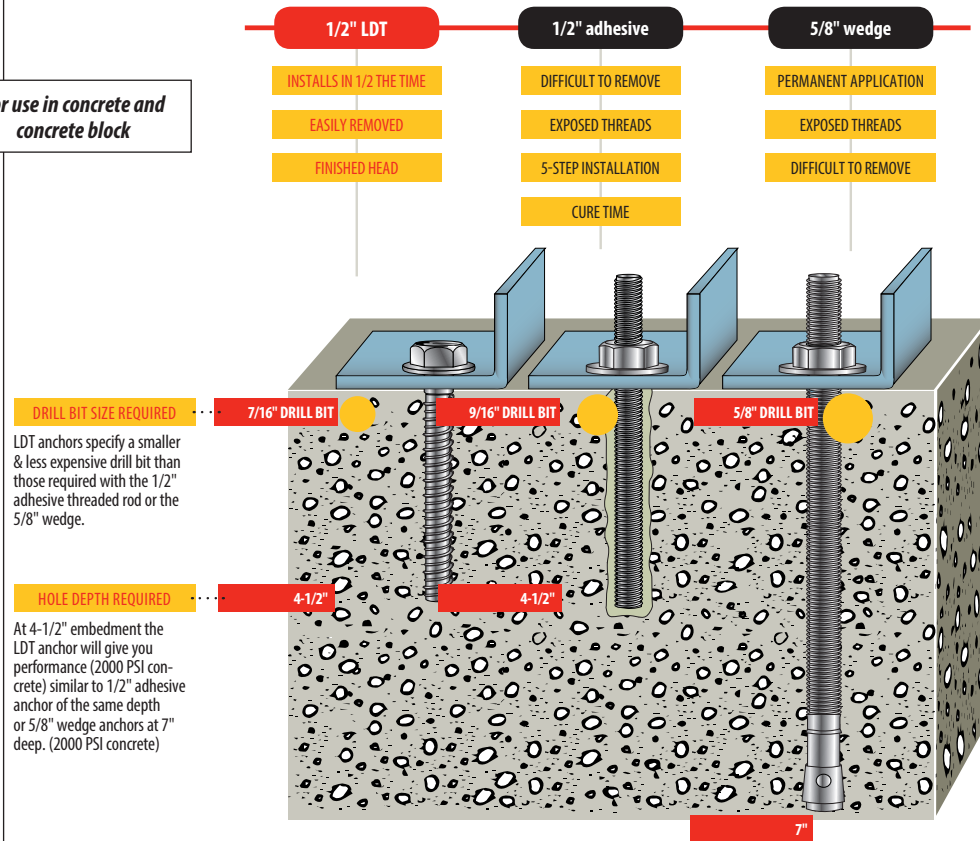

Multi-Set II® Drop-In Anchors


Internally Threaded Heavy- Duty Anchoring Systems

DESCRIPTION/SUGGESTED SPECIFICATIONS

Drop-In, Shell-Type Anchors—

SPECIFIED FOR ANCHORAGE INTO CONCRETE

Drop-In, shell-type anchors feature an internally threaded, all-steel shell with expansion cone insert and flush embedment lip. Anchors are manufactured from zinc-plated carbon steel, 18-8 stainless steel and 316 stainless steel.



Multi-Set II Drop-In Anchors

Anchors should be installed with carbide tipped hammer drill bits made in accordance to ANSI B212.15-1994 specifications.

The minimum concrete thickness for an anchor is 1-1/2 times the embedment depth – or the embedment depth plus three times the anchor diameter – whichever is greater.

Anchors should be tested to ASTM E488 criteria.

ADVANTAGES

Short Drop-In (RX) Anchors

Ideal for Hollow-Core, Pre-Cast Plank and Post Tension Slabs



- Optimized for use in hollow-core, pre-cast plank and post-tension slabs
- Lip keeps anchor flush during installation
- Shallow drilling—fast installation



RX Drop-In
Anchor



RM Drop-In Anchor



- Lipped anchor body keeps anchor flush
- Easy installation
- Keeps all rods same length
- Easy inspection
- Available in carbon steel, 18-8 and 316 stainless steel

RL Drop-In Anchor



- Below surface setting for easy patch work

Coil Thread Anchor




- Quick thread attachment—ideal for 1 sided forming
- Use coil rod on job
- 2 diameters (1/2" and 3/4")

APPLICATIONS



Pumps and heavy piping are common applications for larger diameter Multi-Set Drop-In Anchors.




Cable tray and strut suspended from concrete ceilings are ideal Multi-Set applications. In post-tension or hollow-core slabs use the RX-38.



The Multi-Set Anchor is the standard for pipe-hanging. The RM version has a retainer lip to keep all anchors flush at the surface, keeping all your threaded rod the same length.

FEATURES

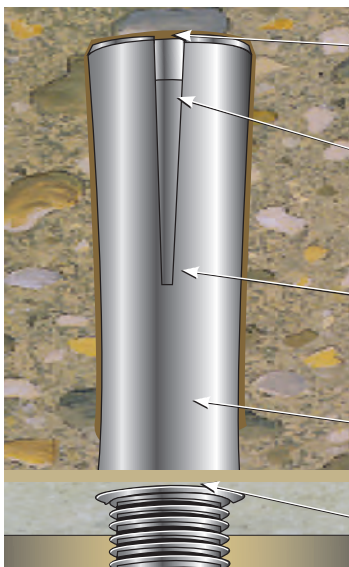

Expander Slots—allow for easy setting and superior performance

Cone Insert—that expands the anchor when driven with setting tool and hammer

Body—available in zinc-plated steel, 18-8 stainless steel, and 316 stainless steel

Easy Depth Inspection—keeps threaded rod drop lengths consistent

Retainer Lip—to keep anchor flush with surface

For use with threaded rods or headed bolts (supplied by contractor)

SELECTION CHART

Bits for RX-38 and RX-12 Short Drop-Ins

BIT NO.	DESCRIPTION	DRILLING DEPTH
DCX-138	3/8" Depth Charge Stop Drill (RX-38)	3/4"
DCX-112	1/2" Depth Charge Stop Drill (RX-12)	1"

APPROVALS/LISTINGS

Meets or exceeds U.S. Government G.S.A. Specification A-A-55614 Type 1 (Formerly GSA: FF-S-325 Group VIII)


Multi-Set II Drop-in anchors may be covered by one or more of the following approvals/listings:

- Underwriters Laboratories
- Factory Mutual
- Caltrans


See Selection Chart next page.

INSTALLATION STEPS


To set anchor flush with surface:




1. Drill hole to required embedment (see Table on page 82).



2. Clean hole with pressurized air.



3. Drive anchor flush with surface of concrete.



4. Expand anchor with setting tool provided (see chart on page 82). Anchor is properly expanded when shoulder of setting tool is flush with top of anchor.



- Shoulder prevents over drilling. Less likely to hit reinforcing steel or post-tension cable in concrete



- No wasted time or energy drilling deeper than necessary
- Prevents anchor from dropping too far into hole below work surface



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



SELECTION CHARTS

Multi-Set II Drop-In Anchors



PART NUMBER RTX-138
For use with RX-38 only.



PART NUMBER RTX-112
For use with RX-12 only.

USER TYPE / APPLICATION	BASE MATERIAL	DROP-IN ANCHOR TYPE	APPROVALS	PART NO.	SETTING TOOL PART NO.*	BOLT SIZE/ THREADS PER INCH	DRILL BIT DIAM.		THREAD DEPTH		EMBEDMENT MIN. HOLE DEPTH***		QTY/WT PER BOX qty / lbs.	QTY/ WT PER MASTER CARTON qty / lbs.
							in.	(mm)	in.	(mm)	in.	(mm)		
HVAC/Fire Sprinkler Plumber (Pipe-fitter)	Solid concrete/ lightweight fill deck	RM	Caltrans	RM-14	RT-114	1/4" / 20	3/8	(9.5)	3/8	(9.5)	1	(25.4)	100 / 2.6	1000 / 28
			UL, FM	RM-38	RT-138	3/8" / 16	1/2	(12.7)	1/2	(12.7)	1-5/8	(41.3)	50 / 3.4	500 / 36
			UL, FM Caltrans	RM-12	RT-112	1/2" / 13	5/8	(15.9)	3/4	(19.1)	2	(50.8)	50 / 5.8	400 / 49
			UL, FM	RM-58	RT-158	5/8" / 11	7/8	(22.2)	1	(25.4)	2-1/2	(63.5)	25 / 7.8	125 / 41
			UL, FM Caltrans	RM-34	RT-134	3/4" / 10	1	(25.4)	1-1/4	(31.8)	3-3/16	(81.0)	25 / 11.9	100 / 49
	Hollow-core pre-cast or Post tension	RX	N/A	RX-38	RTX-138	3/8" / 16	1/2	(12.7)	3/8	(9.5)	3/4	(19.1)	100 / 3.5	1000 / 36
			N/A	RX-12	RTX-112	1/2" / 13	5/8	(15.9)	1/2	(12.7)	1	(25.4)	50 / 3.0	500 / 31
	Solid concrete/ lightweight fill deck	SRM** 18-8 S.S.	N/A	SRM-14	RT-114	1/4" / 20	3/8	(9.5)	3/8	(9.5)	1	(25.4)	100 / 2.7	1000 / 28
			UL, FM	SRM-38	RT-138	3/8" / 16	1/2	(12.7)	1/2	(12.7)	1-5/8	(41.3)	50 / 3.4	500 / 36
			UL, FM	SRM-12	RT-112	1/2" / 13	5/8	(15.9)	3/4	(19.1)	2	(50.8)	50 / 6.0	400 / 50
			UL, FM	SRM-58	RT-158	5/8" / 11	7/8	(22.2)	1	(25.4)	2-1/2	(63.5)	25 / 7.9	125 / 42
			N/A	SRM-34	RT-134	3/4" / 10	1	(25.4)	1-1/4	(31.8)	3-3/16	(81.0)	25 / 12.0	100 / 50
	Solid concrete	SSRM** 316 S.S.	N/A	SSRM-12	RT-112	1/2" / 13	5/8	(15.9)	3/4	(19.1)	2	(50.8)	50 / 6.0	400 / 50
Concrete Contractor, General Contractor	Solid concrete	CL Coil Threaded	N/A	CL-12	RT-112	1/2" / 6	5/8	(15.9)	3/4	(19.1)	2	(50.8)	50 / 5.7	400 / 47
			N/A	CL-34	RT-134	3/4" / 4.5	1	(25.4)	1-1/4	(31.8)	3-3/16	(81.0)	25 / 11.9	100 / 49
Concrete Cutting/Sawing Contractor/Misc. Metal	Solid concrete/ lightweight fill deck	RL (w/o lip)	N/A	RL-14	RT-114	1/4" / 20	3/8	(9.5)	3/8	(9.5)	1	(25.4)	100 / 2.6	1000 / 28
			N/A	RL-38	RT-138	3/8" / 16	1/2	(12.7)	1/2	(12.7)	1-5/8	(41.3)	50 / 3.4	500 / 36
			N/A	RL-12	RT-112	1/2" / 13	5/8	(15.9)	3/4	(19.1)	2	(50.8)	50 / 5.8	400 / 49
			N/A	RL-58	RT-158	5/8" / 11	7/8	(22.2)	1	(25.4)	2-1/2	(63.5)	25 / 7.8	125 / 41
			N/A	RL-34	RT-134	3/4" / 10	1	(25.4)	1-1/4	(31.8)	3-3/16	(81.0)	25 / 11.9	100 / 49

* 1 setting tool per master carton. ** For continuous extreme low temperature, use stainless steel. *** Embedment is equal to overall length of Drop-In Anchor

RX-38 and RX-12 Short Drop-In Kits

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
RX-38	3/8" drop-in	RX-12	1/2" drop-in
RTX-138	Setting Tool for RX-38	RTX-112	Setting Tool for RX-12
DCX-138	Depth Charge Stop Drill – 1/2"	DCX-112	Depth Charge Stop Drill – 5/8"

PERFORMANCE TABLE

Multi-Set II Drop-In Anchors

Ultimate Tension and Shear Values (lbs/kN) in Solid Concrete*

BOLT DIAM. in. (mm)		DRILL BIT SIZE in. (mm)		MIN. EMBEDMENT DEPTH in. (mm)		ANCHOR TYPE	TENSION lbs. (kN)						SHEAR lbs. (kN)	
							f _c = 2000 PSI	(13.8 MPa)	f _c = 4000 PSI	(27.6 MPa)	f _c = 6000 PSI	(41.4 MPa)	f _c ≥ 2000 PSI	(13.8 MPa)
1/4	(6.4)	3/8	(9.5)	1	(25.4)	RM, RL or CL-Carbon or SRM-18-8 S.S. or SSRM 316 S.S.	1,680	(7.5)	2,360	(10.5)	2,980	(13.3)	1,080	(4.8)
3/8	(9.5)	1/2	(12.7)	1-5/8	(41.3)		2,980	(13.3)	3,800	(16.9)	6,240	(27.8)	3,160	(14.1)
1/2	(12.7)	5/8	(15.9)	2	(50.8)		3,300	(14.7)	5,840	(26.0)	8,300	(36.9)	4,580	(20.4)
5/8	(15.9)	7/8	(22.2)	2-1/2	(63.5)		5,500	(24.5)	8,640	(38.4)	11,020	(49.0)	7,440	(33.1)
3/4	(19.1)	1	(25.4)	3-3/16	(81.0)		8,280	(36.8)	9,480	(42.2)	12,260	(54.5)	10,480	(46.6)

* To calculate the Allowable Load of the anchor, divide the Ultimate Load by 4.

* For continuous extreme low temperature applications, use stainless steel.

PERFORMANCE TABLE

Multi-Set II Drop-In Anchors

Ultimate Tension and Shear Values (lbs/kN) in Lightweight Concrete*

BOLT DIAMETER in. (mm)		DRILL BIT SIZE in. (mm)		MINIMUM EMBEDMENT DEPTH in. (mm)		ANCHOR TYPE	LIGHTWEIGHT CONCRETE f'c = 3000 PSI (20.7 MPa)				LOWER FLUTE OF STEEL DECK WITH LIGHTWEIGHT CONCRETE FILL f'c = 3000 PSI (20.7 MPa)			
							TENSION		SHEAR		TENSION		SHEAR	
							lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
3/8	(9.5)	1/2	(12.7)	1-5/8	(39.7)	RM, RL or CL-Carbon or SRM-18-8 S.S or SSRM-316 S.S.	2,035	(9.1)	1,895	(8.4)	3,340	(14.9)	4,420	(19.6)
1/2	(12.7)	5/8	(15.9)	2	(50.8)		2,740	(12.2)	2,750	(12.2)	3,200	(14.2)	4,940	(22.0)
5/8	(15.9)	7/8	(22.2)	2-1/2	(63.5)		4,240	(18.9)	4,465	(19.9)	5,960	(26.5)	5,840	(26.0)
3/4	(19.1)	1	(25.4)	3-3/16	(81.0)		5,330	(23.7)	6,290	(28.0)	8,180	(36.4)	9,120	(40.6)

* To calculate the Allowable Load of the anchor, divide the Ultimate Load by 4.

PERFORMANCE TABLE

Multi-Set II Drop-In Anchors

Recommended Edge and Spacing Distance Requirements*

BOLT DIAMETER in. (mm)		DRILL BIT SIZE in. (mm)		EMBEDMENT DEPTH in. (mm)		ANCHOR TYPE	EDGE DISTANCE REQUIRED TO OBTAIN MAX. WORKING LOAD		MIN. EDGE DISTANCE AT WHICH LOAD FACTOR APPLIED = .80 FOR TENSION = .70 FOR SHEAR		SPACING REQUIRED TO OBTAIN MAX. WORKING LOAD		MIN. ALLOWABLE SPACING BETWEEN ANCHORS LOAD FACTOR APPLIED = .80 FOR TENSION = .55 FOR SHEAR	
							in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)
1/4	(6.4)	3/8	(9.5)	1	(25.4)	RM, RL or CL-Carbon or SRM-18-8 S.S. or SSRM-316 S.S.	1-3/4	(44.5)	7/8	(22.2)	3-1/2	(88.9)	1-3/4	(44.5)
3/8	(9.5)	1/2	(12.7)	1-5/8	(41.3)		2-7/8	(73.0)	1-7/16	(36.5)	5-11/16	(144.5)	2-7/8	(73.0)
1/2	(12.7)	5/8	(15.9)	2	(50.8)		3-1/2	(88.9)	1-3/4	(44.5)	7	(177.8)	3-1/2	(88.9)
5/8	(15.9)	7/8	(22.2)	2-1/2	(63.5)		4-3/8	(111.1)	2-3/16	(55.6)	8-3/4	(222.3)	4-3/8	(111.1)
3/4	(19.1)	1	(25.4)	3-3/16	(81.0)		5-5/8	(142.9)	2-13/16	(71.4)	11-3/16	(284.2)	5-5/8	(142.9)

* Spacing and edge distances shall be divided by 0.75 when anchors are placed in structural lightweight concrete. Linear interpolation may be used for intermediate spacing and edge distances.



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



RED HEAD

PERFORMANCE TABLE

Multi-Set II Drop-In Anchors

Ultimate Tension and Shear Values (lbs/kN) for RX-series (3/4" and 1" Embedment)*

BOLT DIAMETER in. (mm)		DRILL BIT SIZE in. (mm)		EMBEDMENT in. (mm)		2500 PSI (17.2 MPa) CONCRETE				4000 PSI (27.6 MPa) CONCRETE				HOLLOW CORE			
						TENSION		SHEAR		TENSION		SHEAR		TENSION		SHEAR	
lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
3/8	(9.5)	1/2	(12.7)	3/4	(19.1)	1,571	(7.0)	2,295	(10.2)	1,987	(8.8)	2,903	(12.9)	1,908	(8.5)	2,401	(10.7)
1/2	(12.7)	5/8	(15.9)	1	(25.4)	2,113	(9.4)	2,585	(11.5)	2,673	(11.9)	3,270	(14.5)	2,462	(11.0)	2,401	(10.7)

* The tabulated values are for RX anchors installed at a minimum of 12 diameters on center and minimum edge distance of 6 diameters for 100 percent anchor efficiency. Spacing and edge distance may be reduced to 6 diameters spacing and 3 diameter edge distance provided the values are reduced 50 percent. Linear Interpolation may be used for intermediate spacings and edge margins.

* To calculate the Allowable Load of the anchor, divide the Ultimate Load by 4


PERFORMANCE TABLE

Multi-Set II Drop-In Anchors

Anchoring Overhead in 3,000 PSI Lightweight Concrete on Metal Deck*

ANCHOR	DRILL HOLE DIAMETER in. (mm)		EMBEDMENT in. (mm)		3000 PSI (20.7 MPa) CONCRETE			
						ULTIMATE TENSION LOAD lbs. (kN)	ALLOWABLE WORKING LOAD lbs. (kN)	
RX-38 Drop-In	1/2	(12.7)	3/4	(19.1)	Upper Flute	1,410 (6.3)	353 (1.6)	
					Lower Flute	1,206 (5.4)	301 (1.3)	

* To calculate the Allowable Load of the anchor, divide the Ultimate Load by 4

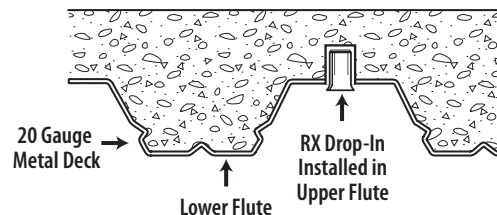

Combined Tension and Shear Loading—for Multi-Set Anchors

Allowable loads for anchors subjected to combined shear and tension forces are determined by the following equation:

$$(P_s/P_t)^{5/3} + (V_s/V_t)^{5/3} \leq 1$$

P_s = Applied tension load

V_s = Applied shear load

P_t = Allowable tension load

V_t = Allowable shear load

Dynabolt® Sleeve Anchors

**Versatile,
Medium-Duty
Sleeve Anchor**



**Dynabolt
Hex Nut Sleeve Anchor**

APPROVALS/LISTINGS

Meets or exceeds U.S. Government G.S.A. Specification A-A-1922A
(Formerly GSA: FF-S-325 Group II, Type 3, Class 3)
Factory Mutual

DESCRIPTION/SUGGESTED SPECIFICATIONS

Sleeve Type Anchors—

SPECIFIED FOR ANCHORAGE INTO CONCRETE, GROUT-FILLED CONCRETE BLOCK, HOLLOW CONCRETE BLOCK AND BRICK



Sleeve type anchors feature a split expansion sleeve over a threaded stud bolt body and integral expander, nut and washer.

Anchors are made of Plated Carbon Steel, or Type 18-8 Stainless Steel.

Anchors should be installed with carbide tipped hammer drill bits made in accordance to ANSI B212.15-1994.

Anchors are tested to ASTM E488 criteria.


ADVANTAGES

- Anchor diameter equals hole diameter
- Available in hex head and three other head styles
- Available 1/4 - 3/4" diameter up to 6-1/4" length
- Zinc plated carbon steel and 304 stainless steel
- Provides full 360° hole contact over large area and reduces concrete stress
- Heavy-loading capacity
- Preassembled for faster, easier installations
- Dynabolt can be installed through object to be fastened
- Sleeve design improves holding power
- No pre-spotting of holes necessary


Available Head Styles

Full range of head style, corrosion protection, and sizes makes the Dynabolt Sleeve the right product for almost any application.


Phillips Flat Head
(FS)




Hex Nut
(HN)




INSTALLATION STEPS



1. Use a carbide tipped drill bit whose diameter is equal to the anchor. See Chart to determine proper size bit for anchor used. Drill hole to any depth exceeding minimum embedment. Clean hole.



2. Insert assembled anchor through fixture and into hole so that washer or head is flush with materials to be fastened.



3. Expand anchor by tightening nut or head 2 to 3 turns.

APPLICATIONS



Electrical junction boxes are common applications for the Dynabolt Sleeve anchor because it works well in solid concrete, concrete block, and brick. It is also available in several finished head styles.



The Dynabolt Sleeve anchor works well in hollow materials like brick and block. It is available in zinc-plated carbon steel and 304 stainless steel.

SELECTION CHART

Dynabolt Carbon Steel w/Zinc Plating

HEAD STYLE	PART NO.	ANCHOR DIA. & DRILL BIT SIZE	EFFECTIVE ANCHOR LENGTH*		BOLT DIA. / THREADS PER INCH	MIN. EMBEDMENT		MAX. THICKNESS OF MATERIAL TO BE FASTENED		QTY/WT PER BOX qty / lbs.	QTY/WT PER MASTER CTN qty / lbs.
			in.	(mm)		in.	(mm)	in.	(mm)		
Hex Nut	HN-1614	5/16"	1-1/2	(38.1)	1/4" / 20	1-1/4	(31.8)	1/4	(6.4)	100 / 4.0	1000 / 41
	HN-3817	3/8"	1-7/8	(47.6)	5/16" / 18	1-1/2	(38.1)	3/8	(9.5)	50 / 3.5	500 / 36
	HN-3830		3	(76.2)	5/16" / 18	1-1/2	(38.1)	1-1/2	(38.1)	50 / 4.9	400 / 40
	HN-1222	1/2"	2-1/4	(57.2)	3/8" / 16	1-7/8	(47.6)	3/8	(9.5)	25 / 3.3	250 / 34
	HN-1230		3	(76.2)	3/8" / 16	1-7/8	(47.6)	1-1/8	(28.6)	25 / 4.0	200 / 33
	HN-1240		4	(101.6)	3/8" / 16	1-7/8	(47.6)	2-1/8	(54.0)	25 / 5.3	200 / 44
	HN-5830	5/8"	3	(76.2)	1/2" / 13	2	(50.8)	1	(25.4)	25 / 7.0	150 / 46
	HN-5842		4-1/4	(108.0)	1/2" / 13	2	(50.8)	2-1/4	(57.2)	10 / 3.9	100 / 41
	HN-3440	3/4"	4	(101.6)	5/8" / 11	2-1/4	(57.2)	1-3/4	(44.5)	5 / 3.2	50 / 33
Phillips Flat Head	FS-3840	3/8" (head dia. .722)	4	(101.6)	5/16" / 18	1-1/2	(38.1)	2-1/2	(63.5)	50 / 5.3	400 / 44
	FS-3850		5	(127.0)	5/16" / 18	1-1/2	(38.1)	3-1/2	(88.9)	50 / 5.6	300 / 40
	FS-3860		6	(152.4)	5/16" / 18	1-1/2	(38.1)	4-1/2	(114.3)	50 / 8.0	300 / 48

* Phillips flat head uses a standard 80°–82° counter sink.




Typical Applications—Shelf ledgers, electrical boxes, conduit

Environment—Interior (non-corrosive)

Level of Corrosion—Low

*Effective Anchor Length

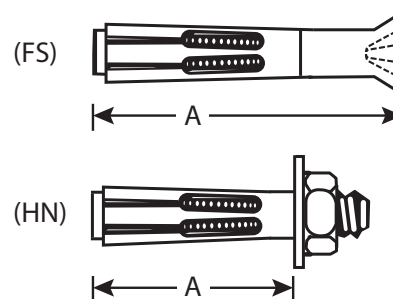

SELECTION CHART

Dynabolt 304 Stainless Steel

HEAD STYLE	PART NO.	ANCHOR DIA. & DRILL BIT SIZE	EFFECTIVE ANCHOR LENGTH		BOLT DIA. / THREADS PER INCH	MIN. EMBEDMENT		MAX. THICKNESS OF MATERIAL TO BE FASTENED		QTY/WT PER BOX qty / lbs.	QTY/WT PER MASTER CTN qty / lbs.
			in.	(mm)		in.	(mm)	in.	(mm)		
Hex Nut	SHN-3817	3/8"	1-7/8	(47.6)	5/16" / 18	1-1/2	(38.1)	3/8	(9.5)	50 / 3.5	500 / 36
	SHN-1222	1/2"	2-1/4	(57.2)	3/8" / 16	1-7/8	(47.6)	3/8	(9.5)	25 / 3.3	250 / 34
	SHN-1240		4	(101.6)	3/8" / 16	1-7/8	(47.6)	2-1/8	(54.0)	25 / 5.3	200 / 44
Phillips Flat Head	SFS-3826	3/8"	2-7/8	(73.0)	5/16" / 18	1-1/2	(38.1)	1-3/8	(34.9)	50 / 3.8	500 / 40
	SFS-3840		4	(101.6)	5/16" / 18	1-1/2	(38.1)	2-1/2	(63.5)	50 / 5.3	400 / 44

* Flat head uses a standard 80°–82° counter sink.

For continuous extreme low temperature applications, use stainless steel.



Typical Applications—Cladding and Brick Ties

Environment—Slight to moderate degree of pollution

Level of Corrosion—Medium

PERFORMANCE TABLE

Dynabolt Sleeve Anchors

Ultimate Tension and Shear Values in Solid Concrete (lbs/kN)*

ANCHOR DIAMETER in. (mm)		INSTALLATION TORQUE ft. lbs. (Nm)		BOLT DIAMETER in. (mm)		MINIMUM EMBEDMENT DEPTH in. (mm)		ANCHOR TYPE (STEEL)	f'c = 2000 PSI (13.8 MPa)				f'c = 3000 PSI (20.7 MPa)				f'c = 4000 PSI (27.6 MPa)			
									TENSION lbs. (kN)		SHEAR lbs. (kN)		TENSION lbs. (kN)		SHEAR lbs. (kN)		TENSION lbs. (kN)		SHEAR lbs. (kN)	
1/4	(6.4)	3.5	(4.7)	3/16	(4.8)	1-1/8	(28.6)	Carbon or Stainless	1,200	(5.3)	1,215	(5.4)	1,325	(5.9)	1,215	(5.4)	1,450	(6.4)	1,215	(5.4)
5/16	(7.9)	8	(10.8)	1/4	(6.4)	1-1/4	(31.8)		1,400	(6.2)	2,040	(9.1)	1,920	(8.5)	2,220	(9.9)	2,600	(11.6)	2,400	(10.7)
3/8	(9.5)	14	(19.0)	5/16	(7.9)	1-1/2	(38.1)		1,620	(7.2)	2,560	(11.4)	2,240	(10.0)	2,800	(12.5)	3,100	(13.8)	3,040	(13.5)
1/2	(12.7)	20	(27.1)	3/8	(9.5)	1-7/8	(47.6)		2,220	(9.9)	3,250	(14.5)	3,140	(14.0)	4,000	(17.8)	4,400	(19.6)	4,500	(20.0)
5/8	(15.9)	48	(65.1)	1/2	(12.7)	2	(50.8)		3,080	(13.7)	6,440	(28.6)	4,400	(19.6)	7,240	(32.2)	6,120	(27.2)	8,080	(35.9)
3/4	(19.1)	90	(122.0)	5/8	(15.9)	2-1/4	(57.2)		4,200	(18.7)	10,200	(45.4)	6,060	(27.0)	11,600	(51.6)	8,900	(39.6)	13,100	(58.3)

* For continuous extreme low temperature applications, use stainless steel.

* To calculate the Allowable Load of the anchor, divide the Ultimate Load by 4.

PERFORMANCE TABLE

Dynabolt Sleeve Anchors

Ultimate Tension and Shear Values in Lightweight Concrete (lbs/kN)*

ANCHOR DIAMETER in. (mm)		INSTALLATION TORQUE ft. lbs. (Nm)		BOLT DIAMETER in. (mm)		MINIMUM EMBEDMENT DEPTH in. (mm)		ANCHOR TYPE (STEEL)	f'c = 4000 PSI (27.6 MPa)				f'c = 6000 PSI (41.4 MPa)			
									TENSION lbs. (kN)		SHEAR lbs. (kN)		TENSION lbs. (kN)		SHEAR lbs. (kN)	
1/4	(6.4)	3.5	(4.7)	3/16	(4.8)	1-1/8	(28.6)	Carbon or Stainless	870	(3.9)	730	(3.2)	1,066	(4.7)	894	(4.0)
5/16	(7.9)	8	(10.8)	1/4	(6.4)	1-1/4	(31.8)		1,260	(5.6)	1,680	(7.5)	1,440	(6.4)	2,220	(9.9)
3/8	(9.5)	14	(19.0)	5/16	(7.9)	1-1/2	(38.1)		1,620	(7.2)	2,300	(10.2)	2,240	(10.0)	2,800	(12.5)
1/2	(12.7)	25	(33.9)	3/8	(9.5)	1-7/8	(47.6)		2,600	(11.6)	2,400	(10.7)	3,160	(14.1)	2,400	(10.7)
5/8	(15.9)	48	(65.1)	1/2	(12.7)	2	(50.8)		3,240	(14.4)	5,600	(24.9)	4,300	(19.1)	7,840	(34.9)
3/4	(19.1)	90	(122.0)	5/8	(15.9)	2-1/4	(57.2)		3,640	(16.2)	8,640	(38.4)	5,800	(25.8)	12,480	(55.5)

* To calculate the Allowable Load of the anchor, divide the Ultimate Load by 4.

PERFORMANCE TABLE

Dynabolt Sleeve Anchors

Ultimate Tension and Shear Values in Concrete Masonry Units (lbs/kN)*

ANCHOR DIAMETER in. (mm)		INSTALLATION TORQUE ft. lbs. (Nm)		BOLT DIAMETER in. (mm)		MINIMUM EMBEDMENT DEPTH in. (mm)		ANCHOR TYPE (STEEL)	LIGHTWEIGHT								MEDIUM WEIGHT							
									HOLLOW CORE				GROUT FILLED				HOLLOW CORE				GROUT FILLED			
									TENSION lbs. (kN)		SHEAR lbs. (kN)		TENSION lbs. (kN)		SHEAR lbs. (kN)		TENSION lbs. (kN)		SHEAR lbs. (kN)		TENSION lbs. (kN)		SHEAR lbs. (kN)	
1/4	(6.4)	3.5	(4.7)	3/16	(4.8)	1-1/8	(28.6)	Carbon	1,120	(5.0)	1,215	(5.4)	1,120	(5.0)	1,215	(5.4)	1,120	(5.0)	1,215	(5.4)	1,120	(5.0)	1,215	(5.4)
								Stainless	640	(2.8)	1,620	(7.2)	640	(2.8)	1,620	(7.2)	640	(2.8)	1,620	(7.2)	640	(2.8)	1,620	(7.2)
3/8	(9.5)	15	(20.3)	5/16	(7.9)	1-1/2	(38.1)	Carbon	1,360	(6.0)	2,560	(11.4)	1,360	(6.0)	2,560	(11.4)	1,360	(6.0)	2,560	(11.4)	1,360	(6.0)	2,560	(11.4)
								Stainless	1,160	(5.2)	2,560	(11.4)	1,160	(5.2)	2,560	(11.4)	1,160	(5.2)	2,560	(11.4)	1,160	(5.2)	2,560	(11.4)
1/2	(12.7)	25	(33.9)	3/8	(9.5)	1-7/8	(47.6)	Carbon	N/A		N/A		2,200	(9.9)	3,500	(15.6)	N/A		N/A		2,200	(9.9)	3,500	(15.6)
								Stainless	N/A		N/A		2,100	(9.3)	3,500	(15.6)	N/A		N/A		2,100	(9.3)	3,500	(15.6)
5/8	(15.9)	55	(74.6)	1/2	(12.7)	2	(50.8)	Carbon	N/A		N/A		3,080	(13.7)	6,440	(28.6)	N/A		N/A		3,080	(13.7)	6,440	(28.6)
								Stainless	N/A		N/A		3,080	(13.7)	6,440	(28.6)	N/A		N/A		2,820	(12.5)	6,440	(28.6)
3/4	(19.1)	90	(122.0)	5/8	(15.9)	2-1/2	(63.5)	Carbon	N/A		N/A		4,200	(18.7)	10,200	(45.4)	N/A		N/A		4,200	(18.7)	10,200	(45.4)

* To calculate the Allowable Load of the anchor, divide the Ultimate Load by 4. The tabulated values are for anchors installed in a minimum of 12 diameters on center and a minimum edge distance of 6 diameters for 100 percent anchor efficiency. Spacing and edge distance may be reduced to 6 diameter spacing and 3 diameter edge distance, provided the values are reduced 50 percent. Linear interpolation may be used for intermediate spacings and edge distances.

Note: N/A is defined as Not Advisable.

Combined Tension and Shear Loading—for Dynabolt Anchors

Allowable loads for anchors subjected to combined shear and tension forces are determined by the following equation:

$$(Ps/Pt) + (Vs/Vt) \leq 1$$

Ps = Applied tension load

Vs = Applied shear load

Pt = Allowable tension load

Vt = Allowable shear load

Tapcon® Concrete and Masonry Anchors

THE ORIGINAL
Tapcon




Blue Climaseal™ 410 Stainless Steel

DESCRIPTION/SUGGESTED SPECIFICATIONS

Tapcon Anchors —

SPECIFIED FOR ANCHORAGE INTO CONCRETE, BRICK OR BLOCK



The “original masonry” anchor that cuts its own threads into concrete, brick, or block. Maximum performance is achieved because the Tapcon Anchor, the Condrive Installation Tool, and the carbide-tipped Tapcon Drill Bits are designed to work as a system. It is essential to use the Condrive tool and the correct drill bit to assure consistent anchor performance.

ADVANTAGES

- Works in all masonry base materials.
- Fast and easy—3 anchors per minute.
- No hole spotting or inserts required.
- Removable.
- Slotted hex and phillips flat head styles.
- Extended corrosion protection—Blue Climaseal™.
- Available in 410 Stainless Steel.
- ACQ treated wood compatible.

Tapcon Anchors



Blue Climaseal™ provides extended corrosion protection

Available in 410 Stainless Steel
(see photo on left)

Hex Head style on Tapcon Anchors is available for majority of fixture anchoring needs

Phillips Flat Head style is available when flush seating is necessary in countersink applications

Advanced Threadform cuts into concrete and masonry for reduced installation torque and increased pullout performance

Lengths of Tapcon Anchors range from 1-1/4" to 4" in 3/16" and up to 6" in 1/4" diameters.

Nail-Type Point guides the anchor into the pre-drilled hole. Excellent for wood to concrete applications

Tapcon® is a registered trademark of Buildex, a division of Illinois Tool Works, Inc.

CORROSION RESISTANCE

Kesternich Results (DIN 40018 2.0L)

30 Cycles - 10% or less rust


Salt Spray Results (ASTM B117)

720 Hrs - 10% or less rust

APPLICATIONS



The Tapcon Anchor is especially well suited for window and door frames because it performs well in block, is available in a flat head style, and is fast to install.

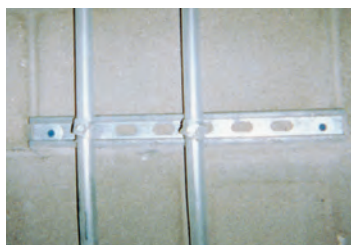


Many horizontal or "wall" applications are attached with Tapcon Anchor because it is removable and works well in block and brick.



The picture shows the Condrive Installation Kit in action. The kit makes for fast and easy change over from drill bit to driver and controls the driving torque to prevent thread stripping and head snapping in hard base materials.

FEATURES

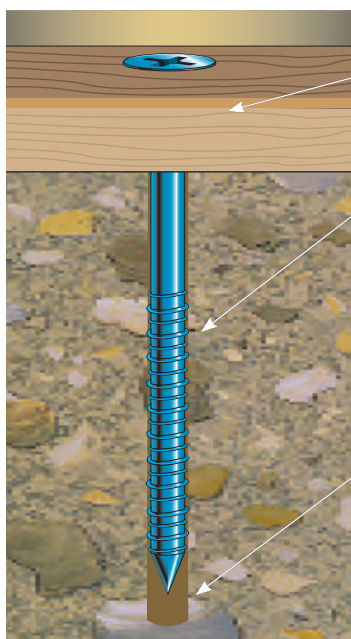

Fixture Thickness—determine the fixture thickness to be anchored

Anchor Embedment—with a minimum recommended embedment of 1", the correct Tapcon anchor choice can be made. Hole depth must be a minimum 1/4" deeper than the anchor embedment to allow for displaced material

Hole Diameter—proper hole diameter is very important to insure consistent performance and maximum pullout strength. 3/16" anchors require 5/32" diameter Tapcon bits, and 1/4" anchors require 3/16" diameter Tapcon bits

APPROVAL/LISTINGS

Blue Climaseal™

ICC Evaluation Service, Inc. — ESR-1671

ICC Evaluation Service, Inc. — ESR-2202

Miami-Dade County

Florida Building Code

410 Stainless Steel

Miami-Dade County

Florida Building Code

For the most current approvals/listings visit: www.itwredhead.com

INSTALLATION STEPS

Read installation instructions before using!



WARNING: If there are any questions concerning proper installation, applications or appropriate use of this product, please call our Technical Services Department at 1-800-848-5611. Failure to follow these instructions can result in serious personal injury.

1. **Select proper fastener – diameter / head style / length.**
 - a) Use selection chart to choose proper length.
2. **Drill Hole – use selection chart to determine drill bit length and depth of hole.**
 - a) Use 5/32" diameter Tapcon bit for 3/16" dia. Tapcon Anchor. Use 3/16" diameter Tapcon bit for 1/4" dia. Tapcon Anchor.
 - b) Drill hole minimum 1/4" deeper than Tapcon Anchor to be embedded.

Minimum anchor embedment: 1"

Maximum anchor embedment: 1 3/4"

3. Drive Anchor.



WARNING: Failure to wear safety glasses with side shields can result in serious personal injury. Always wear ANSI compliant eye protection (ANSI Z87.1-2003).



WARNING: Using the wrong size drill bit will affect performance values and may cause failure.

Head Styles

3/16" diameter has a 1/4" slotted hex washer head (HWH)

1/4" diameter has a 5/16" slotted hex washer head (HWH)



3/16" diameter uses a #2 phillips flat head (PFH)

1/4" diameter uses a #3 phillips flat head (PFH)



SELECTION CHART

Tapcon® Anchors with Blue Climaseal

Diameter 3/16" and 1/4"
Point Type Nail

Thread Form Advanced Threadform Technology™
Finish Blue Climaseal™

All boxes of Tapcon anchors come packaged with matching carbide-tipped bit. Tapcon is packaged 100 pieces per box and 500 pieces per master carton except 3205407 and 3203407 (400 in master carton).

FIXTURE THICKNESS INCHES	RECOMMENDED TAPCON LENGTH		PART NO. 3/16" HEX HEAD	PART NO. 1/4" HEX HEAD	PART NO. 3/16" FLAT HEAD	PART NO. 1/4" FLAT HEAD	BIT LENGTH		STRAIGHT SHANK BITS FOR 3/16" TAPCON PART NO.	STRAIGHT SHANK BITS FOR 1/4" TAPCON PART NO.
	in.	(mm)					in.	(mm)		
0" – 1/4"	1-1/4	(31.8)	3139407	3153407	3169407	3183407	3-1/2	(88.9)	–	3098910
1/4" – 3/4"	1-3/4	(44.5)	3141407	3155407	3171407	3185407	3-1/2	(88.9)	–	3098910
3/4" – 1-1/4"	2-1/4	(57.2)	3143407	3157407	3173407	3187407	4-1/2	(114.3)	3096910	3099910
1-1/4" – 1-3/4"	2-3/4	(69.9)	3145407	3159407	3175407	3189407	4-1/2	(114.3)	3096910	3099910
1-3/4" – 2-1/4"	3-1/4	(82.6)	3147407	3161407	3177407	3191407	5-1/2	(139.7)	3097910	3100910
2-1/4" – 2-3/4"	3-3/4	(95.3)	–	3163407	–	3193407	5-1/2	(139.7)	3097910	3100910
2-1/2" – 3"	4	(101.6)	–	3165407	–	3195407	5-1/2	(139.7)	3097910	3100910
3-1/2" – 4"	5	(127.0)	–	3167407	–	3197407	6-1/2	(165.1)	–	–
4-1/2" – 5"	6	(152.4)	–	3205407	–	3203407	7-1/2	(190.5)	–	3206910

Additional Tapcon bits are available 10 per tube.

SELECTION CHART

Tapcon® 410 SS Anchor

Diameter 3/16" and 1/4" Thread Form Original Notched Hi-Lo™
Point Type Nail Finish 410 Stainless Steel with Silver Climashield™
All boxes of Tapcon anchors come packaged with matching carbide-tipped bit. Tapcon is packaged 100 pieces per box and 500 pieces per master carton except 3461907 (400 in master carton).

FIXTURE THICKNESS INCHES	RECOMMENDED TAPCON LENGTH		PART NO. 1/4" HEX HEAD	PART NO. 3/16" FLAT HEAD	PART NO. 1/4" FLAT HEAD	BIT LENGTH		STRAIGHT SHANK BITS FOR 3/16" TAPCON PART NO.	STRAIGHT SHANK BITS FOR 1/4" TAPCON PART NO.
	in.	(mm)				in.	(mm)		
0" – 1/4"	1-1/4	(31.8)	3367907	–	3373907	3-1/2	(88.9)	–	3098910
1/4" – 3/4"	1-3/4	(44.5)	3368907	3418907	3374907	3-1/2	(88.9)	–	3098910
3/4" – 1-1/4"	2-1/4	(57.2)	3369907	3419907	3375907	4-1/2	(114.3)	3096910	3099910
1-1/4" – 1-3/4"	2-3/4	(69.9)	3370907	3420907	3376907	4-1/2	(114.3)	3096910	3099910
1-3/4" – 2-1/4"	3-1/4	(82.6)	3371907	–	3377907	5-1/2	(139.7)	3097910	3100910
2-1/4" – 2-3/4"	3-3/4	(95.3)	3372907	–	3378907	5-1/2	(139.7)	3097910	3100910
2-1/2" – 3"	4	(101.6)	–	–	–	5-1/2	(139.7)	–	3100910
3-1/2" – 4"	5	(127.0)	3460907	–	–	6-1/2	(165.1)	–	–
4-1/2" – 5"	6	(152.4)	–	–	–	7-1/2	(190.5)	–	–

Tapcon® SDS Bits

PART NUMBER	DESCRIPTION
3311910	7" (SDS Rotohammer Bits for use with 3/16" Tapcon)
7901060	5" (SDS Rotohammer Bits for use with 1/4" Tapcon)

All SDS bits are sold individually.

PERFORMANCE TABLE

Tapcon® Anchors

Ultimate Tension and Shear Values (lbs/kN) in Solid Concrete

ANCHOR DIA.		MIN. DEPTH OF EMBEDMENT		f'c = 2000 PSI (13.8 MPa)				f'c = 3000 PSI (20.7 MPa)				f'c = 4000 PSI (27.6 MPa)				f'c = 5000 PSI (34.5 MPa)			
				TENSION		SHEAR		TENSION		SHEAR		TENSION		SHEAR		TENSION		SHEAR	
in.	(mm)	in.	(mm)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
3/16	(4.8)	1	(25.4)	600	(2.7)	720	(3.2)	625	(2.8)	720	(3.2)	650	(2.9)	720	(3.2)	800	(3.6)	860	(3.8)
		1-1/4	(31.8)	845	(3.7)	720	(3.2)	858	(3.8)	720	(3.2)	870	(3.9)	720	(3.2)	1,010	(4.5)	860	(3.8)
		1-1/2	(38.1)	1,090	(4.8)	860	(3.8)	1,090	(4.8)	860	(3.8)	1,090	(4.8)	860	(3.8)	1,220	(5.4)	860	(3.8)
		1-3/4	(44.5)	1,450	(6.5)	870	(3.9)	1,455	(6.5)	870	(3.9)	1,460	(6.5)	990	(4.4)	1,730	(7.7)	990	(4.4)
1/4	(6.4)	1	(25.4)	750	(3.3)	900	(4.0)	775	(3.4)	900	(4.0)	800	(3.6)	1,360	(6.1)	950	(4.2)	1,440	(6.4)
		1-1/4	(31.8)	1,050	(4.7)	900	(4.0)	1,160	(5.2)	900	(4.0)	1,270	(5.6)	1,360	(6.1)	1,515	(6.7)	1,440	(6.4)
		1-1/2	(38.1)	1,380	(6.1)	1,200	(5.3)	1,600	(7.2)	1,200	(5.3)	1,820	(8.1)	1,380	(6.1)	2,170	(9.7)	1,670	(7.4)
		1-3/4	(44.5)	2,020	(9.0)	1,670	(7.4)	2,200	(9.8)	1,670	(7.4)	2,380	(10.6)	1,670	(7.4)	2,770	(12.3)	1,670	(7.4)

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity.

PERFORMANCE TABLE

Tapcon Anchors

Ultimate Tension and Shear Values (lbs/kN) in Hollow Block

ANCHOR DIAMETER		ANCHOR EMBEDMENT		LIGHTWEIGHT BLOCK				MEDIUM WEIGHT BLOCK			
				TENSION		SHEAR		TENSION		SHEAR	
in.	(mm)	in.	(mm)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
3/16	(4.8)	1	(25.4)	220	(1.0)	400	(1.8)	340	(1.5)	730	(3.2)
1/4	(6.4)	1	(25.4)	250	(1.1)	620	(2.8)	500	(2.2)	1,000	(4.4)

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity.

NOTE: 3/16" Tapcon requires 5/32" bit, 1/4" Tapcon requires 3/16" bit.

PERFORMANCE TABLE

Tapcon® Anchors

Allowable Edge and Spacing Distances

PARAMETER	ANCHOR DIAMETER		NORMAL WEIGHT CONCRETE			CONCRETE MASONRY UNITS (CMU)		
			FULL CAPACITY (Critical Distance Inches)	REDUCED CAPACITY (Minimal Distance Inches)	LOAD REDUCTION FACTOR	FULL CAPACITY (Critical Distance Inches)	REDUCED CAPACITY (Minimal Distance Inches)	LOAD REDUCTION FACTOR
Spacing Between Anchors - Tension	3/16	(4.8)	3	1-1/2	0.73	3	1-1/2	1.00
	1/4	(6.4)	4	2	0.66	4	2	0.84
Spacing Between Anchors - Shear	3/16	(4.8)	3	1-1/2	0.83	3	1-1/2	1.00
	1/4	(6.4)	4	2	0.82	4	2	0.81
Edge Distance - Tension	3/16	(4.8)	1-7/8	1	0.83	4	2	0.91
	1/4	(6.4)	2-1/2	1-1/4	0.82	4	2	0.88
Edge Distance - Shear	3/16	(4.8)	2-1/4	1-1/8	0.70	4	2	0.93
	1/4	(6.4)	3	1-1/2	0.59	4	2	0.80

For SI: 1 inch = 25.4 mm

Tapcon® Condrive Tool Kit


DESCRIPTION/SUGGESTED SPECIFICATIONS

Condrive Installation Tool— SPECIFIED FOR ANCHORAGE INTO CONCRETE, BRICK OR BLOCK

The key to Tapcon's fast and easy installation is the multi-purpose Condrive Installation Tool. The drive sleeve, along with the hex head and phillips sockets provide the installer with the flexibility necessary for the complete variety of Tapcon applications (tool does not include drill bit).

Condrive® Tool - A multi-purpose tool designed for installation of Tapcon hex head and Phillips flat head anchors up to 3-3/4" long. If driving hex head Tapcon, driver will automatically disengage. The Condrive Tool has a reusable plastic case.

Condrive Tools are designed to specifically install Tapcon Anchors and to fit standard hammer drills.

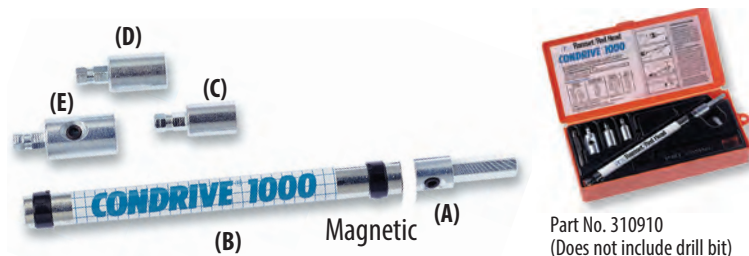

APPLICATIONS



The picture shows the Condrive Installation Kit in action. The kit makes for fast and easy change over from drill bit to driver and controls the driving torque to prevent thread stripping and head snapping in hard base materials.

ADVANTAGES

- Fast change from drilling to driving
- Eliminates need to change out chucks and bits
- Eliminates need for two tools
- Special nut driver is recessed for torque control to reduce head breakage

Condrive Tool Kit Parts (sold only as a kit)

A	Drill Adapter
B	Sleeve
C	3/16" Socket
D	1/4" Socket
E	Phillips Socket

Tapcon® Maxi-Set Anchors



White UltraShield UltraShield

APPLICATIONS



Shutters - protective and decorative

Screened porch and pool enclosures.

Various sheet metal flashings.




Decorative wrought iron.

Wood nailers and plywood attachment.

DESCRIPTION/SUGGESTED SPECIFICATIONS

FOR TAPCON APPLICATIONS THAT REQUIRE MORE ANCHOR BEARING SURFACE.



ADVANTAGES

- Same reliable performance and speed of installation as regular Tapcon.
- UltraShield™ and White UltraShield™ long-life finish deliver excellent corrosion resistance.
- Large 5/8" diameter flange provides more bearing surface and increases pullover resistance.
- High 5/16" hex head adds driving stability.

CORROSION RESISTANCE

Salt Spray Test (ASTM B117)	UltraShield	White UltraShield
	1100 Hrs 10% or less red rust	1500 Hrs 10% or less red rust

APPROVAL/LISTINGS

ICC Evaluation Service, Inc. – #ESR-1671
Miami-Dade County

For the most current approvals/listings visit: www.itwredhead.com

INSTALLATION STEPS

Read installation instructions before using!



WARNING:

If there are any questions concerning proper installation, applications or appropriate use of this product, please call our Technical Services Department at 1-800-848-5611. Failure to follow these instructions can result in serious personal injury.

- Select proper fastener – diameter / head style / length.
 - Use selection chart to choose proper length.
- Drill Hole – use selection chart to determine drill bit length and depth of hole.
 - Use 3/16" diameter Tapcon bit.
 - Drill hole minimum 1/4" deeper than Tapcon Anchor to be embedded.

Minimum anchor embedment: 1"

Maximum anchor embedment: 1 3/4"
- Drive anchor using 5/16" socket.



WARNING:

Failure to wear safety glasses with side shields can result in serious personal injury. Always wear ANSI compliant eye protection (ANSI Z87.1-2003).



WARNING:

Using the wrong size drill bit will affect performance values and may cause failure.

SELECTION CHART

Tapcon® Maxi-Set Anchors

Diameter 1/4" Thread Form Advanced Threadform Technology™
Point Type Nail Finish UltraShield™ or *White UltraShield™
Head Style 5/16" across flats hex with 5/8" diameter flange.

RECOMMENDED TAPCON LENGTH		PART NO. 1/4" HEX HEAD	FINISH	BIT LENGTH		STRAIGHT SHANK BITS FOR 1/4" TAPCON PART NO.
in.	(mm)			in.	(mm)	
1-3/4	(44.5)	3294000	Ultra Shield	3-1/2	(88.9)	3098910
1-3/4	(44.5)	3383100	White Ultra Shield	3-1/2	(88.9)	3098910
2-1/4	(57.2)	3384100	White Ultra Shield	4-1/2	(114.3)	3099910
3-1/4	(82.6)	3409100	White Ultra Shield	5-1/2	(139.7)	3100910

Maxi-Sets are packed 1,000 pieces per master carton except 3409100 is packed 750 pieces.

SELECTION CHART

Tapcon SDS Bits

PART NO.	DESCRIPTION
3311910	7" (SDS Rotohammer Bits for use with 3/16" Tapcon)
7901060	5" (SDS Rotohammer Bits for use with 1/4" Tapcon)

PERFORMANCE TABLE

Tapcon® Maxi-Set Anchors

Ultimate Tension and Shear Values (lbs/kN) in Solid Concrete

ANCHOR DIAMETER in. (mm)		MIN. DEPTH OF EMBEDMENT in. (mm)		f'c = 2000 PSI (13.8 MPa)				f'c = 3000 PSI (20.7 MPa)				f'c = 4000 PSI (27.6 MPa)				f'c = 5000 PSI (34.5 MPa)			
				TENSION		SHEAR		TENSION		SHEAR		TENSION		SHEAR		TENSION		SHEAR	
				lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
1/4	(6.4)	1	(25.4)	750	(3.3)	900	(4.0)	775	(3.4)	900	(4.0)	800	(3.6)	1,360	(6.1)	950	(4.2)	1,440	(6.4)
		1-1/4	(31.8)	1,050	(4.7)	900	(4.0)	1,160	(5.2)	900	(4.0)	1,270	(5.6)	1,360	(6.1)	1,515	(6.7)	1,440	(6.4)
		1-1/2	(38.1)	1,380	(6.1)	1,200	(5.3)	1,600	(7.2)	1,200	(5.3)	1,820	(8.1)	1,380	(6.1)	2,170	(9.7)	1,670	(7.4)
		1-3/4	(44.5)	2,020	(9.0)	1,670	(7.4)	2,200	(9.8)	1,670	(7.4)	2,380	(10.6)	1,670	(7.4)	2,770	(12.3)	1,670	(7.4)

Allowable working loads for the single installation under static loading should not exceed 25% capacity of the Ultimate Load. To calculate the Allowable Load, divide the Ultimate Load by 4.

PERFORMANCE TABLE

Tapcon® Maxi-Set Anchors

Ultimate Tension and Shear Values (lbs/kN) in Hollow Block

ANCHOR DIAMETER in. (mm)		ANCHOR EMBEDMENT in. (mm)		LIGHTWEIGHT BLOCK				MEDIUM WEIGHT BLOCK			
				TENSION		SHEAR		TENSION		SHEAR	
				lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
1/4	(6.4)	1	(25.4)	250	(1.1)	620	(2.8)	500	(2.2)	1,000	(4.4)

Allowable working loads for the single installation under static loading should not exceed 25% capacity of the Ultimate Load. To calculate the Allowable Load, divide the Ultimate Load by 4.

NOTE: 3/16" Tapcon requires 5/32" bit, 1/4" Tapcon requires 3/16" bit.

PERFORMANCE TABLE

Tapcon® Maxi-Set Anchors

Allowable Edge and Spacing Distances

PARAMETER	ANCHOR DIAMETER in. (mm)		NORMAL WEIGHT CONCRETE			CONCRETE MASONRY UNITS (CMU)		
			FULL CAPACITY (Critical Distance Inches)	REDUCED CAPACITY (Minimal Distance Inches)	LOAD REDUCTION FACTOR	FULL CAPACITY (Critical Distance Inches)	REDUCED CAPACITY (Minimal Distance Inches)	LOAD REDUCTION FACTOR
Spacing Between Anchors - Tension	1/4	(6.4)	4	2	0.66	4	2	0.84
Spacing Between Anchors - Shear	1/4	(6.4)	4	2	0.82	4	2	0.81
Edge Distance - Tension	1/4	(6.4)	2-1/2	1-1/4	0.82	4	2	0.88
Edge Distance - Shear	1/4	(6.4)	3	1-1/2	0.59	4	2	0.80

For SI: 1 inch = 25.4 mm



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



Tapcon® SCOTS Anchors




APPLICATIONS



Shutters - protective and decorative



Screened porch and pool enclosures
Aluminum fixtures
Railings



Metal roofing
Flexible flashings

DESCRIPTION/SUGGESTED SPECIFICATIONS

PREMIUM CONCRETE ANCHOR THAT COMBINES THE CORROSION PROTECTION OF STAINLESS STEEL WITH THE PERFORMANCE OF TAPCON ANCHORS.



ADVANTAGES

- 300 Series Stainless Steel head and Carbon Steel body.
- Integral washer design provides more bearing surface.
- Rubber EPDM sealing washer "locks-out" moisture from building interior.
- Head paint available in white or bronze (extra charge).
- Delivers the same holding performance as Tapcon anchors with Blue Climaseal™.
- Reduces replacement of "weathered" fasteners.

CORROSION RESISTANCE

Kesternich Results (DIN 50018, 2.0L)

Climaseal™

30 Cycles - 10% or less red rust

APPROVAL/LISTINGS

ICC Evaluation Service, Inc. – ESR-1671

Miami-Dade County – #12-0816.06

For the most current approvals/listings visit: www.itwredhead.com

INSTALLATION STEPS

Read installation instructions before using!



WARNING:

If there are any questions concerning proper installation, applications or appropriate use of this product, please call our Technical Services Department at 1-800-848-5611. Failure to follow these instructions can result in serious personal injury.

1. Select proper fastener – diameter / head style / length.
 - a) Use selection chart to choose proper length.
2. Drill Hole – use selection chart to determine drill bit length and depth of hole.
 - a) Use 3/16" diameter Tapcon bit.
 - b) Drill hole minimum 1/4" deeper than Tapcon Anchor to be embedded.
Minimum anchor embedment: 1"
Maximum anchor embedment: 1 3/4"
3. Drive anchor using 5/16" socket.



WARNING:

Failure to wear safety glasses with side shields can result in serious personal injury. Always wear ANSI compliant eye protection (ANSI Z87.1-2003).



WARNING:

Using the wrong size drill bit will affect performance values and may cause failure.

SELECTION CHART

Tapcon®
SCOTS Anchors

Diameter 1/4" Thread Form Advanced Threadform Technology™
Point Type Nail Finish Silver Climaseal™
Head Style 5/16" HWH (300 Series Stainless)

RECOMMENDED TAPCON LENGTH		PART NO. 1/4" HEX HEAD	BIT LENGTH		PART NO. STRAIGHT SHANK BITS FOR 1/4" TAPCON
in.	(mm)		in.	(mm)	
1-3/4	(44.5)	3358407	3-1/2	(88.9)	3098910

SCOTS are packed 1,000 pieces per master, 100 pieces per inner.

SELECTION CHART

Tapcon®
SDS Bits

PART NO.	DESCRIPTION
3311910	7" (SDS Rotohammer Bits for use with 3/16" Tapcon)
7901060	5" (SDS Rotohammer Bits for use with 1/4" Tapcon)

PERFORMANCE TABLE

Tapcon®
SCOTS Anchors

**Ultimate Tension and Shear Values (lbs/kN)
in Solid Concrete**

ANCHOR DIAMETER in. (mm)		MIN. DEPTH OF EMBEDMENT in. (mm)		f'c = 2000 PSI (13.8 MPa)				f'c = 3000 PSI (20.7 MPa)				f'c = 4000 PSI (27.6 MPa)				f'c = 5000 PSI (34.5 MPa)			
				TENSION		SHEAR		TENSION		SHEAR		TENSION		SHEAR		TENSION		SHEAR	
				lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
1/4	(6.4)	1	(25.4)	750	(3.3)	900	(4.0)	775	(3.4)	900	(4.0)	800	(3.6)	1,360	(6.1)	950	(4.2)	1,440	(6.4)
		1-1/4	(31.8)	1,050	(4.7)	900	(4.0)	1,160	(5.2)	900	(4.0)	1,270	(5.6)	1,360	(6.1)	1,515	(6.7)	1,440	(6.4)
		1-1/2	(38.1)	1,380	(6.1)	1,200	(5.3)	1,600	(7.2)	1,200	(5.3)	1,820	(8.1)	1,380	(6.1)	2,170	(9.7)	1,670	(7.4)
		1-3/4	(44.5)	2,020	(9.0)	1,670	(7.4)	2,200	(9.8)	1,670	(7.4)	2,380	(10.6)	1,670	(7.4)	2,770	(12.3)	1,670	(7.4)

Allowable working loads for the single installation under static loading should not exceed 25% capacity of the Ultimate Load. To calculate the Allowable Load, divide the Ultimate Load by 4.

PERFORMANCE TABLE

Tapcon®
SCOTS Anchors

**Ultimate Tension and Shear Values (lbs/kN)
in Hollow Concrete Masonry Units**

ANCHOR DIAMETER in. (mm)		ANCHOR EMBEDMENT in. (mm)		LIGHTWEIGHT BLOCK				MEDIUM WEIGHT BLOCK			
				TENSION		SHEAR		TENSION		SHEAR	
in.	(mm)	in.	(mm)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
1/4	(6.4)	1	(25.4)	250	(1.1)	620	(2.8)	500	(2.2)	1,000	(4.4)

Allowable working loads for the single installation under static loading should not exceed 25% capacity of the Ultimate Load. To calculate the Allowable Load, divide the Ultimate Load by 4.

NOTE: 3/16" Tapcon requires 5/32" bit, 1/4" Tapcon requires 3/16" bit.

PERFORMANCE TABLE

Tapcon®
SCOTS Anchors

**Allowable Edge
and Spacing Distances**

PARAMETER	ANCHOR DIAMETER		NORMAL WEIGHT CONCRETE			CONCRETE MASONRY UNITS (CMU)		
	in.	(mm)	FULL CAPACITY (Critical Distance Inches)	REDUCED CAPACITY (Minimal Distance Inches)	LOAD REDUCTION FACTOR	FULL CAPACITY (Critical Distance Inches)	REDUCED CAPACITY (Minimal Distance Inches)	LOAD REDUCTION FACTOR
Spacing Between Anchors - Tension	1/4	(6.4)	4	2	0.66	4	2	0.84
Spacing Between Anchors - Shear	1/4	(6.4)	4	2	0.82	4	2	0.81
Edge Distance - Tension	1/4	(6.4)	2-1/2	1-1/4	0.82	4	2	0.88
Edge Distance - Shear	1/4	(6.4)	3	1-1/2	0.59	4	2	0.80

For SI: 1 inch = 25.4 mm



Call our toll free number 800-848-5611 or visit our web site for the most current product and technical information at www.itwredhead.com



Tapcon® XL Anchors



UltraShield

APPLICATIONS



Shutters - protective and decorative



Screened porch and pool enclosures.

Railings

Mounted electrical equipment

Sill plates



DESCRIPTION/SUGGESTED SPECIFICATIONS

EXTRA LARGE TAPCON FOR EXTRA LARGE CHALLENGES!

ADVANTAGES

- Internal TORX® T-40 drive assures easy installation.
 - High button head resists cam-out during installation.
 - Corrosion protection of UltraShield™ to combat aggressive environments.
 - Available in silver.
 - Delivers over 3,000 lbs. holding power in concrete.
 - Alternative to sleeve anchors.
- Use 1/4" Tapcon Drill Bit**

CORROSION RESISTANCE

Salt Spray Test (ASTM B117) **UltraShield**
1100 Hrs 10% or less rust

INSTALLATION STEPS

Read installation instructions before using!



WARNING:

If there are any questions concerning proper installation, applications or appropriate use of this product, please call our Technical Services Department at 1-800-848-5611. Failure to follow these instructions can result in serious personal injury.

1. Drill Hole minimum ¼" deeper than Tapcon Anchor to be embedded.

Minimum anchor embedment: 1"

Maximum anchor embedment: 1¾"

2. Drive anchor using T-40 Torx® Drive



WARNING:

Failure to wear safety glasses with side shields can result in serious personal injury. Always wear ANSI compliant eye protection (ANSI Z87.1-2003).



WARNING:

Using the wrong size drill bit will affect performance values and may cause failure.

SELECTION CHART

**Tapcon®
XL Anchors**

Diameter 5/16" Thread Form Reverse Hi-Lo®
Point Type Nail Finish UltraShield™
Head Style High button with TORX T-40 Drive

RECOMMENDED TAPCON LENGTH		PART NO.	FINISH
in.	(mm)		
2-1/4	(57.2)	3395902	Ultra Shield

XLs are packed 100 pieces per master carton.

PERFORMANCE TABLE

**Tapcon®
XL Anchors**

**Ultimate Tension and Shear Values (lbs/kN)
in Solid Concrete**

ANCHOR DIAMETER in. (mm)		MIN. DEPTH OF EMBEDMENT in. (mm)		EDGE DISTANCE in. (mm)		f'c = 3000 PSI (20.7 MPa)			
						TENSION		SHEAR	
						lbs.	(kN)	lbs.	(kN)
5/16	(7.9)	1-1/4	(31.8)	1-9/16	(39.7)	1,050	(4.7)	1,330	(5.9)
				2-3/16	(55.6)	1,205	(5.4)	1,725	(7.7)
		1-3/4	(44.5)	1-9/16	(39.7)	2,020	(9.0)	1,530	(6.8)
				2-3/16	(55.6)	2,250	(10.0)	2,505	(11.1)
		2-1/4	(57.2)	1-9/16	(39.7)	2,850	(12.7)	1,955	(8.9)
				2-3/16	(55.6)	3,120	(13.9)	3,250	(14.4)

Allowable working loads for the single installation under static loading should not exceed 25% capacity of the Ultimate Load. To calculate the Allowable Load, divide the Ultimate load by 4
Pilot hole diameter – Use 1/4" ANSI spec carbide tipped drill bit. Drill 1/4" longer than necessary embedment.
Recommended center to center distance of 3-3/4" is required for 100% efficiency and 1-7/8" for 50% efficiency.

PERFORMANCE TABLE

**Tapcon®
XL Anchors**

**Ultimate Tension and Shear Values
in Concrete Masonry Units**

ANCHOR DIAMETER in. (mm)		MINIMUM DEPTH OF EMBEDMENT in. (mm)		EDGE DISTANCE in.	HOLLOW CORE ¹				GROUT-FILLED ²			
					TENSION		SHEAR		TENSION		SHEAR	
					lbs.	(kN)	lbs.	(kN)	lbs.	(kN)	lbs.	(kN)
5/16	(7.9)	1-1/4	(31.8)	4	1,045	(4.6)	2,280	(10.1)	1,045	(4.6)	2,280	(10.1)
		1-3/4	(44.5)	4	NOT RECOMMENDED		NOT RECOMMENDED		1,950	(8.7)	2,825	(12.6)
		2-1/4	(57.2)	4	NOT RECOMMENDED		NOT RECOMMENDED		3,770	(16.8)	3,140	(14.0)

Allowable working loads for the single installation under static loading should not exceed 25% capacity of the Ultimate Load. To calculate the Allowable Load, divide the Ultimate load by 4
1. CMU = 1,600 PSI minimum compressive strength.
2. CMU = 1,600 PSI minimum compressive strength with 2,000 PSI grout.
Embedment is through 1-1/4" face shell of hollow block.

Tapcon® Storm Guard Anchors



APPLICATIONS



Direct mount permanent anchors for quick and easy installations for metal and plywood panels to wood, hollow block and concrete.

DESCRIPTION/SUGGESTED SPECIFICATIONS

DIRECT MOUNT PERMANENT ANCHORS FOR QUICK AND EASY INSTALLATIONS OF METAL AND PLYWOOD PANELS TO CONCRETE AND BLOCK.



ADVANTAGES

- White UltraShield™ for corrosion protection in coastal environments.
- 1/4-20 x 7/8" external thread above collar.
- No caulking required.
- Threaded chamfered safety collar prevents overdriving.
- 3/16" Hex Drive.
- Use with ANSI standard 3/16" carbide-tipped drill bit. (bit not included)

CORROSION RESISTANCE

Salt Spray Test (ASTM B117) White UltraShield
1500 Hrs 10% or less red rust

APPROVAL/LISTINGS

Miami-Dade County

For the most current approvals/listings visit: www.itwredhead.com

INSTALLATION STEPS

Read installation instructions before using!



CAUTION:

DO NOT BEND DRILL BIT.
DO NOT FORCE THE DRILL BIT INTO BASE MATERIAL.



WARNING:

Failure to wear safety glasses with side shields can result in serious personal injury. Always wear ANSI compliant eye protection (ANSI Z87.1-2003).



WARNING:

Using the wrong size drill bit will affect performance values and may cause failure.


SELECTION CHART

Tapcon®
Storm Guard Anchors

Diameter 1/4"
Point Type Nail

Thread Form Original Notched Hi-Lo™
Finish UltraShield™

PART NO.	DESCRIPTION	COATING	BOX QTY
3424100	1/4" dia. x 2-1/4"	White UltraShield	1,000

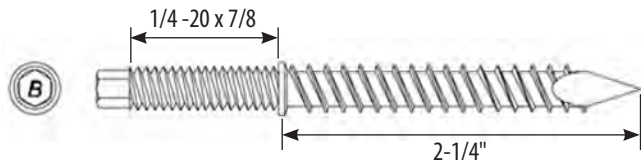

PERFORMANCE TABLE

Tapcon®
Storm Guard Anchors

Ultimate Tension and Shear Values (lbs/kN)
in Solid Concrete*

ANCHOR DIAMETER in. (mm)		MIN. DEPTH OF EMBEDMENT in. (mm)		EDGE DISTANCE in. (mm)		f'c = 3000 PSI (20.7 MPa)			
						TENSION		SHEAR	
						lbs.	(kN)	lbs.	(kN)
1/4	(6.4)	1	(25.4)	1-1/4	(31.8)	1,230	(5.5)	1,339	(6.0)
		1	(25.4)	2-1/2	(63.5)	1,701	(7.6)	2,333	(10.4)
		1-3/4	(44.5)	1-1/4	(31.8)	2,704	(12.0)	1,375	(6.1)
		1-3/4	(44.5)	2-1/2	(63.5)	2,844	(12.6)	2,618	(11.6)

Allowable working loads for the single installation under static loading should not exceed 25% capacity of the Ultimate Load. To calculate the Allowable Load, divide the Ultimate Load by 4.

PERFORMANCE TABLE

Tapcon®
Storm Guard Anchors

Ultimate Tension and Shear Values (lbs/kN)
in Hollow Concrete Masonry Units

ANCHOR DIAMETER in. (mm)		MIN. DEPTH OF EMBEDMENT in. (mm)		EDGE DISTANCE in. (mm)		f'c = 2000 PSI (13.8 MPa)			
						TENSION		SHEAR	
						lbs.	(kN)	lbs.	(kN)
1/4	(6.4)	1-1/4	(31.8)	1-1/4	(31.8)	690	(3.1)	290	(1.3)
		1-1/4	(31.8)	2-1/2	(63.5)	855	(3.8)	680	(3.0)

Allowable working loads for the single installation under static loading should not exceed 25% capacity of the Ultimate Load. To calculate the Allowable Load, divide the Ultimate Load by 4.

PERFORMANCE TABLE

Tapcon®
Storm Guard Anchors

Ultimate Tension and Shear Values (lbs/kN)
in Grout-Filled (CMU)

ANCHOR DIAMETER in. (mm)		MIN. DEPTH OF EMBEDMENT in. (mm)		EDGE DISTANCE in. (mm)		GROUT-FILLED (CMU) f'c = 2000 PSI (13.8 MPa)			
						TENSION		SHEAR	
						lbs.	(kN)	lbs.	(kN)
1/4	(6.4)	1-3/4	(44.5)	1-1/4	(31.8)	1,340	(6.0)	655	(2.9)
		1-3/4	(44.5)	2-1/2	(63.5)	1,560	(6.9)	1,600	(7.1)

Allowable working loads for the single installation under static loading should not exceed 25% capacity of the Ultimate Load. To calculate the Allowable Load, divide the Ultimate Load by 4.

Notes

Conversion Table (soft)

6.35 mm = 1/4"	50 mm = 2"
9.5 mm = 3/8"	98 mm = 3-7/8"
10 mm = 3/8"	100 mm = 4"
12 mm = 1/2"	130 mm = 5-1/8"
16 mm = 5/8"	153 mm = 6"
20 mm = 3/4"	156 mm = 6-1/8"
22 mm = 7/8"	178 mm = 7"
24 mm = 1"	183 mm = 7-1/4"
25 mm = 1"	190 mm = 7-1/2"
30 mm = 1-3/16"	200 mm = 7-7/8"
35 mm = 1-3/8"	213 mm = 8-3/8"
40 mm = 1-1/2"	250 mm = 9-7/8"

